




REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-02	AC

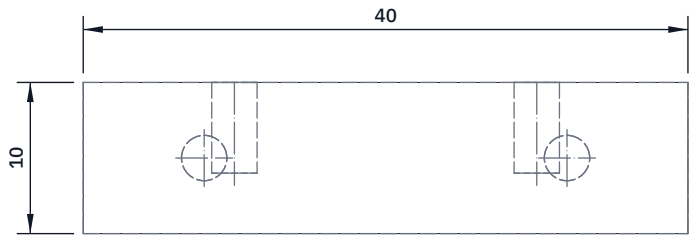


TOP VIEW
Scale 2:1; looking down (along -Z)

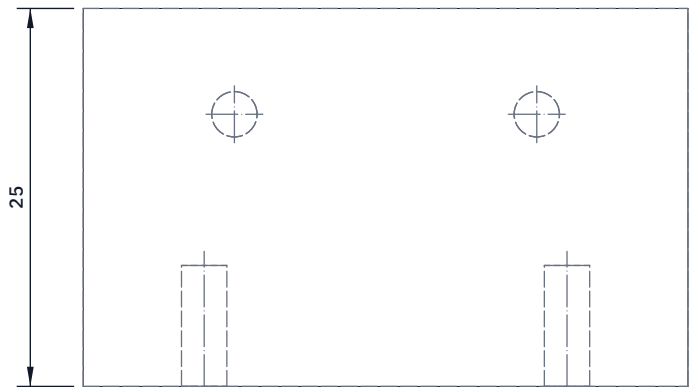

FRONT VIEW
Scale 2:1; looking at the front (along +Y)

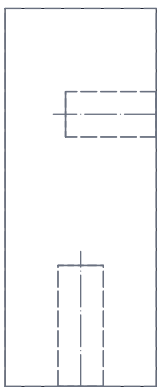

RIGHT VIEW
Scale 2:1; looking at the right side (along -X)

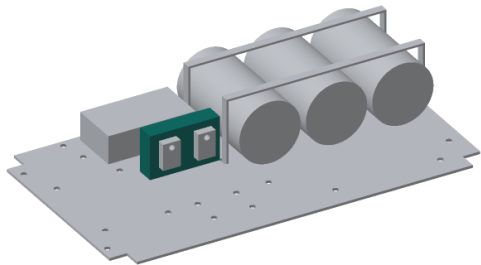

WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut 40 mm off 25 x 10 mm flat bar; square and deburr the ends.
The bar stands on a 40 x 10 mm face (the bottom), 25 mm tall.
Bottom: drill 2.5 mm, 9 mm deep, and tap M3 8 deep, 12 mm each side of centre, on the centre line. Screws come up through the plate.
Back face (the 40 x 25 face toward the back of the case): drill 2.5 mm, 7 deep, and tap M3 6 deep, 10 mm each side of centre and 18 mm up from the bottom. One MOSFET tab is screwed to each.
File the back face flat; no burrs may pierce the insulating pad.
Fit: each MOSFET tab on an insulating thermal pad, with an insulating bushing under the screw head. The tabs are live at PV voltage.
Check: with the MOSFETs fitted, a meter reads open circuit from each tab to the bar.

PVTRACE				github.com/BoujeeEnjinia1701/pvtrace					
PVTrace MOSFET bar: making sketch									
DRAWING NO. PVT-DWG-103				REV P1		SHEET 1 of 1		SIZE ANSI B	
SCALE 2:1		UNITS mm		PROJECTION 		DATE 2026-10-02		DRAWN Amish Chadha	
MATERIAL / NOTES Aluminium flat bar 25 x 10 mm, 6061 or 6082									
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com								Generated from cad/src; do not edit by hand	