


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC




TOP VIEW

Scale 1:2; looking down (along -Z)

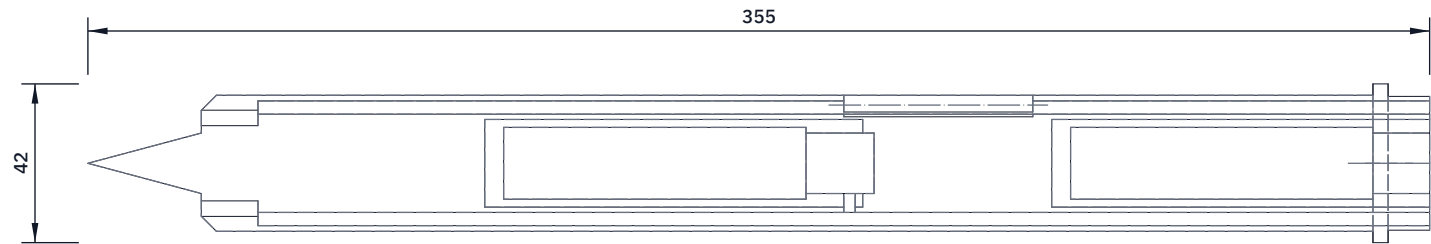

FRONT VIEW

Scale 1:2; looking at the front (along +Y)



RIGHT VIEW

Scale 1:2; looking at the right side (along -X)



WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Blade 36 wide, 6 thick (half of 12), 310 long below the collar, with a wedge tip 16 wide and 30 long between the electrode grooves.
Half collar 42 dia x 4; half spigot 35.4 dia x 11 on top of it.
Windows 19 wide x 80 long, centred 150 and 300 mm below grade (the upper window ends at the collar).
Board slots 23.2 wide x 0.9 deep, 100 long, for the probe edges.
Wire channels 3.5 wide x 2.5 deep, centred 14.75 each side, from 15 mm above the foot up through the spigot.
Temperature probe bore 6.2 dia, centred 15.4 from the centre line, open to the edge, 200 to 250 below grade.
Electrode grooves 4.1 dia, 24 apart, 15 deep into the foot.
Inside face (the glue face) faces up in the top view.
Electronics pockets 16 wide x 3.4 deep: above each window, for the parts on the probe boards. The back half has no pockets.
Check: no stringing in the channels; 4 mm rod drops into its groove.

ROOTMESH			github.com/BoujeeEnjinia1701/rootmesh		
RootMesh sensor fin, front half: making sketch					
DRAWING NO. RMS-DWG-101			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:2	UNITS mm	PROJECTION 		DATE 2026-10-01	DRAWN Amish Chadha
MATERIAL / NOTES PETG or ASA, 3D printed flat on its outside face, 100 % infill					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					
Generated from cad/src; do not edit by hand					