



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC




TOP VIEW

Scale 1:1; looking down (along -Z)

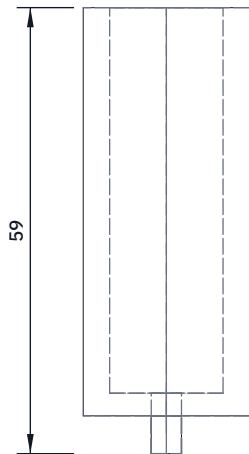

FRONT VIEW

Scale 1:1; looking at the front (along +Y)

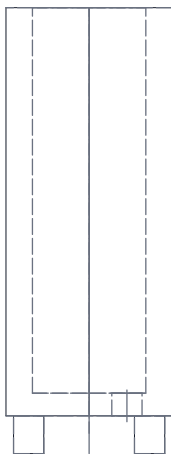

RIGHT VIEW

Scale 1:1; looking at the right side (along -X)



WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Sleeve 22 OD x 15 ID, 51 long, on a 3 mm base, on two 4 x 4 legs 5 tall
16 apart. Print upright; the legs need no support.
4 mm lead hole in the base, 5 mm off centre, for the cell's lower lead.
Fit: drops into the tube and stands on the top of the fin spigot,
legs either side of the probe pocket, so the cell centre is 62 mm
below grade. It lifts out through the 28 mm hole in the head floor.
Tie a loop of strong cord through the top of the sleeve to lift it.
Check: the 14500 cell slides in by hand; the holder drops through
a 28 mm hole and a 36 mm tube without catching.

ROOTMESH

github.com/BoujeeEnjinia1701/rootmesh

RootMesh cell holder: making sketch

DRAWING NO. RMS-DWG-105		REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:1	UNITS mm	PROJECTION 	DATE 2026-10-01	DRAWN Amish Chadha
MATERIAL / NOTES ASA, 3D printed upright				
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com			Generated from cad/src; do not edit by hand	