



CONCEPT, NOT FOR FABRICATION

RootMesh · github.com/BoujeeEnjinia1701/rootmesh




TOP VIEW

Scale 1:5; looking down (along -Z)

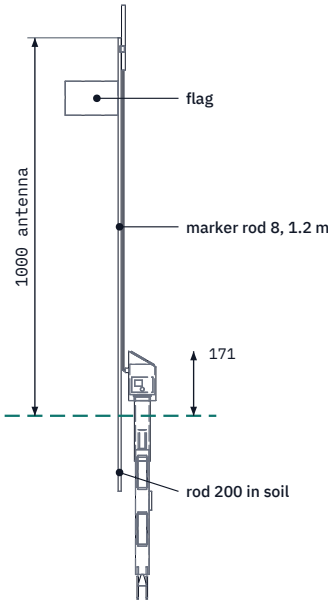

INSTALLED ELEVATION

Scale 1:20; front, with marker rod and antenna

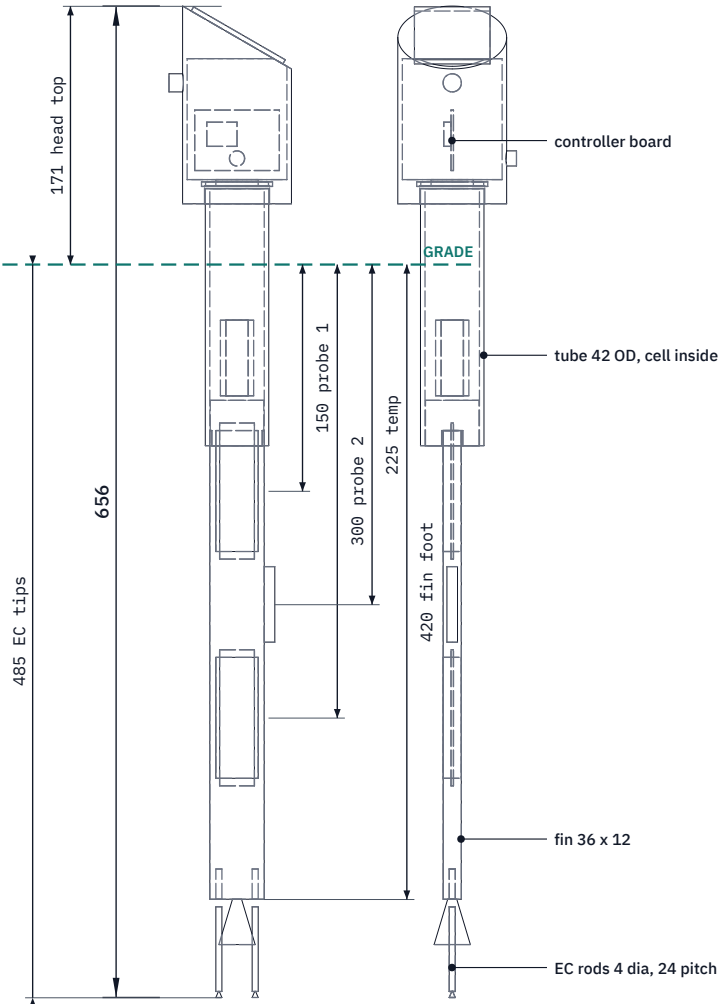


FRONT VIEW

Scale 1:5; looking at the front (along +Y)

RIGHT VIEW

Scale 1:5; looking at the right side (along -X)



ISOMETRIC VIEW

Not to scale; seen from the front right and above, about 30 deg elevation

MAIN DIMENSIONS AND INTERFACES (MM)

Tube 42 OD x 36 ID PVC, Z -120 to 50; head socket 12 deep
Head 72 dia ASA, top 171 above grade; panel 70 x 50 at 30 deg, faces +X
Fin 36 x 12 x 310, spigot 35.4 dia into the tube
Probe windows centered 150 and 300 deep, 80 long
DS18B20 at 225; EC rods 4 dia at 24 pitch, 60 exposed
Cell 14500 LiFePO4 centered 62 below grade
Antenna sleeve dipole centered 1000 on the marker rod (RMS-DDR-001 D2)
Fin pushed 330 into undisturbed soil below a 50 dia auger hole
Slot tool (BOM 15, separate): 32 x 8 steel blade, point 485 deep, 80 dia stop collar
Third-angle; front view from -Y; X toward the equator

ROOTMESH

github.com/BoujeeEnjinia1701/rootmesh

General arrangement, sensor stake

DRAWING NO.

RMS-DWG-001

REV

P3

SHEET

1 of 1

SIZE

ANSI B

SCALE

1:5

UNITS

mm

PROJECTION



DATE

2026-09-25

DRAWN

Amish Chadha

MATERIAL / NOTES

ASA head, PVC tube, PETG or ASA fin, 316 stainless electrodes; bought-in parts per bom/bom.csv. PRELIMINARY, NOT FOR FABRICATION

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand