



CONCEPT, NOT FOR FABRICATION

RootMesh · github.com/BoujeeEnjinia1701/rootmesh




TOP VIEW

Scale 1:5; looking down (along -Z)

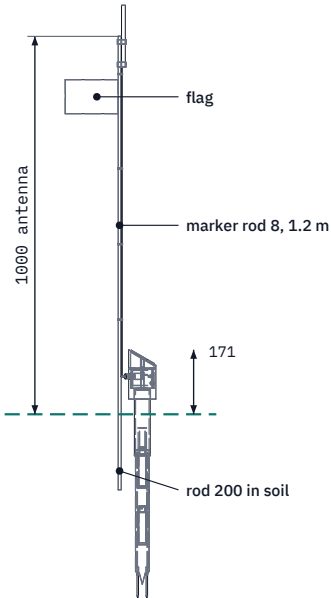

INSTALLED ELEVATION

Scale 1:20; front, with marker rod and antenna

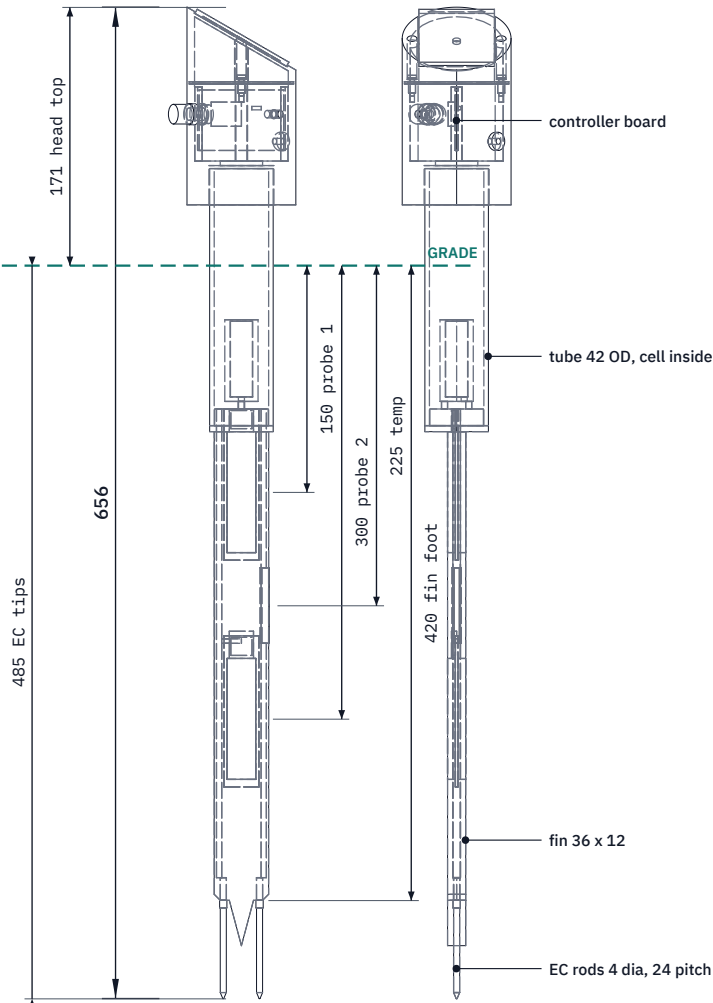

FRONT VIEW

Scale 1:5; looking at the front (along +Y)

RIGHT VIEW

Scale 1:5; looking at the right side (along -X)



ISOMETRIC VIEW

Not to scale; seen from the front right and above, about 30 deg elevation

MAIN DIMENSIONS AND INTERFACES (MM)

- Tube 42 OD x 36 ID PVC, Z -106 to 64; bonded 24 into the head socket
- Head 72 dia ASA body and cap, parted at Z 120; O-ring and 2 M3 screws
- Head top 171 above grade; panel 70 x 50 at 30 deg, faces +X
- Fin 36 x 12 x 310 in two glued halves; collar 42 dia, spigot 35.4
- Probe windows centered 150 and 300 deep, 80 long
- DS18B20 at 225; EC rods 4 dia at 24 pitch, 60 exposed
- Cell 14500 LiFePO4 (IFR14500EC class) centered 62 below grade
- Antenna 915 MHz dipole, 164 long, centered 1000 on the marker rod (US915)
- Status LED 5 mm in a 5.2 hole, 60 above the head base, front right
- Fin pushed 340 into undisturbed soil below a 50 dia auger hole
- Slot tool (BOM 15, separate): 32 x 8 steel blade, point 485 deep, 80 dia stop collar
- Third-angle: front view from -Y; X toward the equator

ROOTMESH

github.com/BoujeeEnjinia1701/rootmesh

General arrangement, sensor stake

DRAWING NO. RMS-DWG-001		REV P5	SHEET 1 of 1	SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 	DATE 2026-10-02	DRAWN Amish Chadha
MATERIAL / NOTES ASA head, PVC tube, PETG or ASA fin, 316 stainless electrodes; bought-in parts per bom/bom.csv. PRELIMINARY, NOT FOR FABRICATION				
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com			Generated from cad/src; do not edit by hand	