



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC

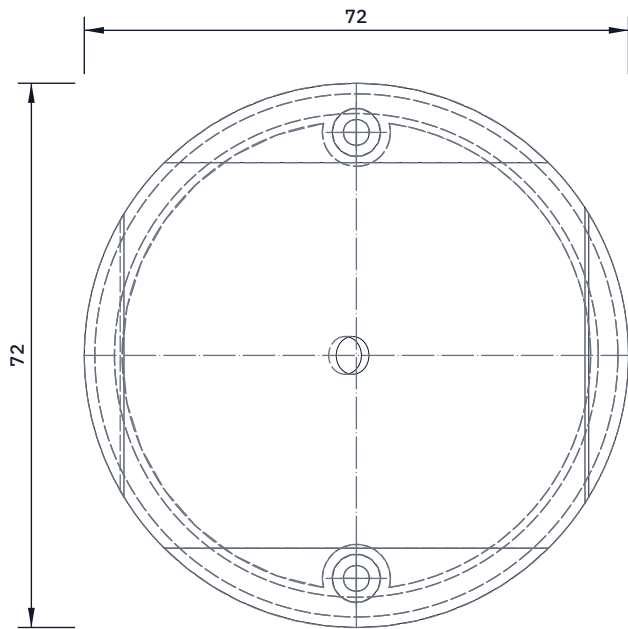


TOP VIEW

Scale 1:1; looking down (along -Z)

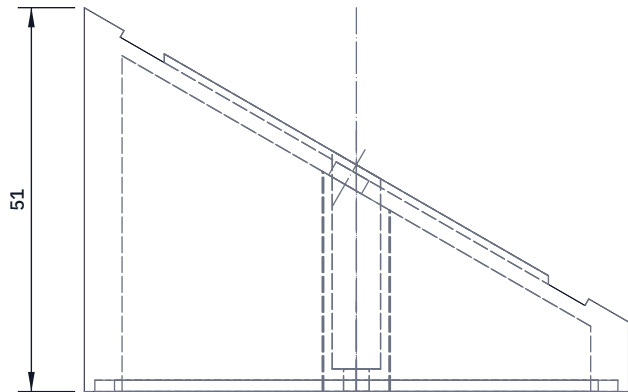


FRONT VIEW

Scale 1:1; looking at the front (along +Y)

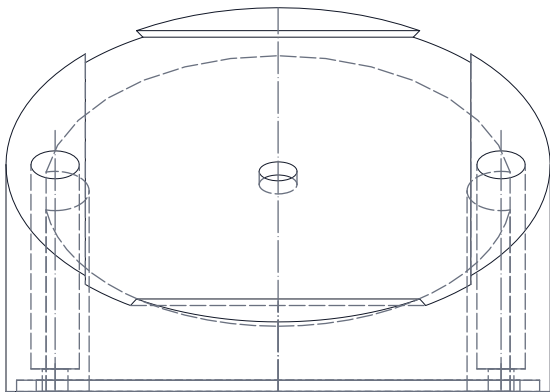

RIGHT VIEW

Scale 1:1; looking at the right side (along -X)

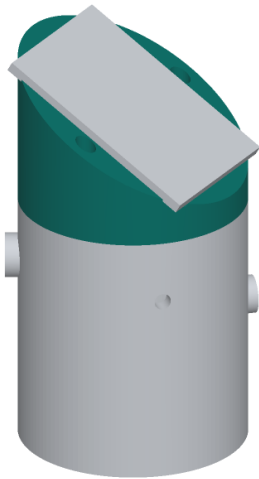

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cap 72 dia; top sloped 30 degrees toward the equator; 9 mm tall at the low edge, 51 mm at the high edge; 3 mm roof, hollow underneath.
Print with the sloped top on the bed (supports under the rim only).
Panel recess 71 x 51 x 1 deep in the sloped top; 5 mm lead hole through the roof at its centre.
O-ring groove in the rim face: 64.0 to 69.2 dia, 1.5 deep.
Two 3.4 mm screw holes over the bosses, counterbored 6.4 dia from the top down to 3 mm above the rim face, inside solid columns.
Check: the 64 x 2 O-ring sits in the groove standing 0.5 mm proud; the cap sits on the body with both holes over the inserts.

ROOTMESH

github.com/BoujeeEnjinia1701/rootmesh

RootMesh head cap: making sketch

DRAWING NO. RMS-DWG-107			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:1	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES ASA, 3D printed with the sloped top on the bed					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand