

Lecture Xsens.vi

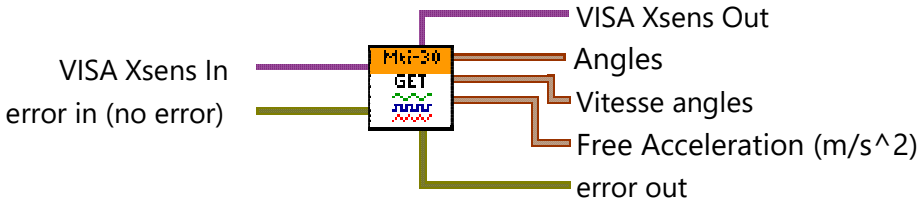

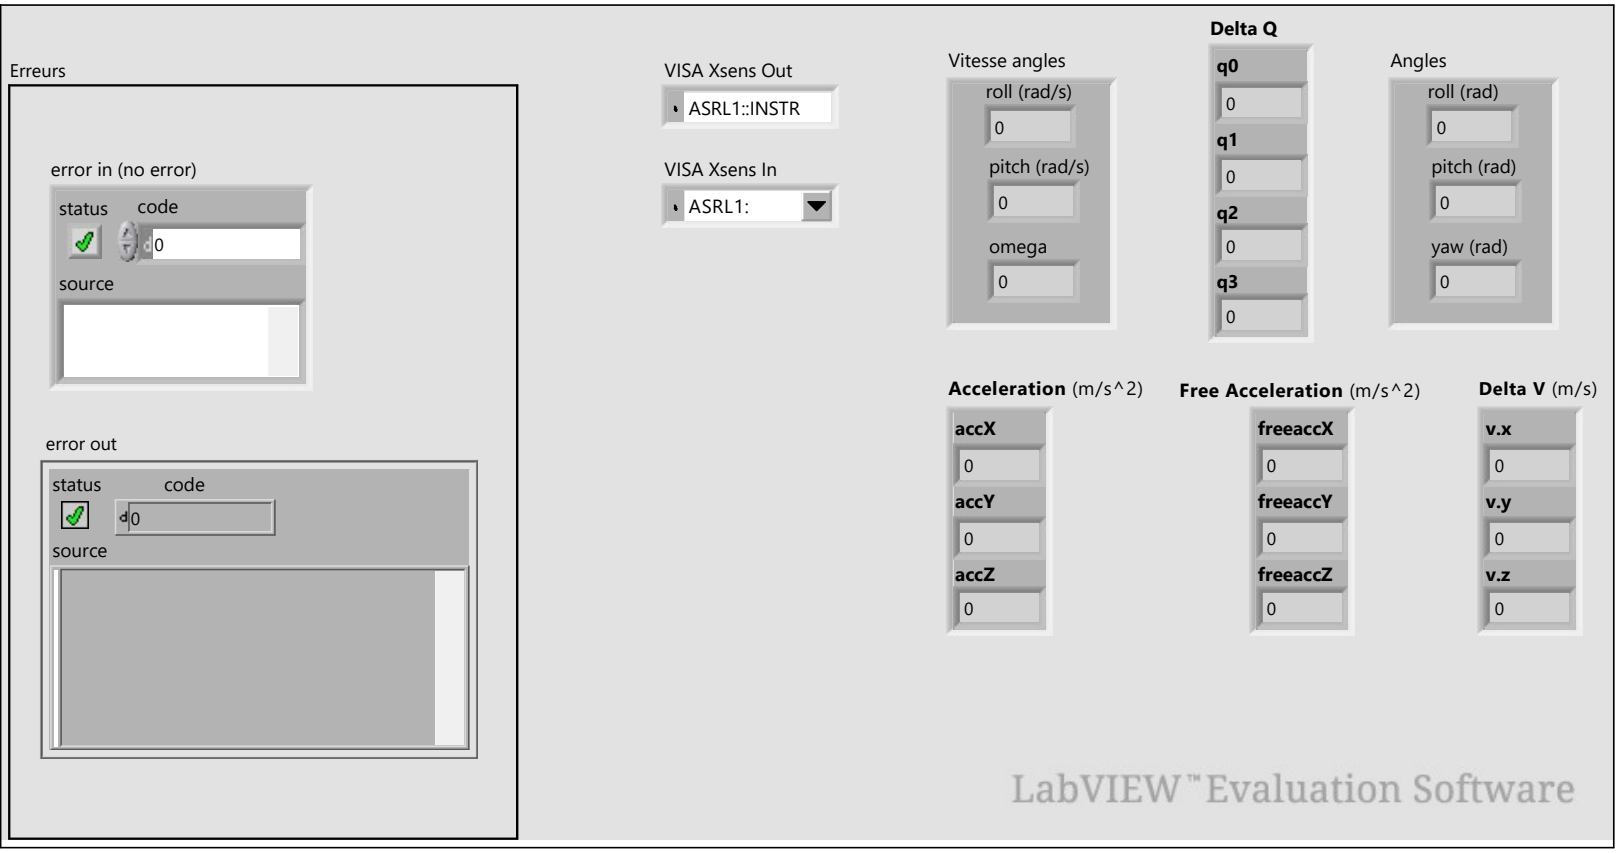

VISA Xsens In

error in (no error)

<B>error in</B> can accept error information wired from VIs previously called. Use this information to decide if any functionality should be bypassed in the event of errors from other VIs.

Right-click the <B>error in</B> control on the front panel and select <B>Explain Error</B> or <B>Explain Warning</B> from the shortcut menu for more information about the error.

status

<B>status</B> is TRUE (X) if an error occurred or FALSE (checkmark) to indicate a warning or that no error occurred.

Right-click the <B>error in</B> control on the front panel and select <B>Explain Error</B> or <B>Explain Warning</B> from the shortcut menu for more information about the error.

code
<B>code</B> is the error or warning code.

Right-click the <B>error in</B> control on the front panel and select <B>Explain Error</B> or <B>Explain Warning</B> from the shortcut menu for more information about the error.

source
<B>source</B> describes the origin of the error or warning.

Right-click the <B>error in</B> control on the front panel and select <B>Explain Error</B> or <B>Explain Warning</B> from the shortcut menu for more information about the error.

error out
<B>error out</B> passes error or warning information out of a VI to be used by other VIs.

Right-click the <B>error out</B> indicator on the front panel and select <B>Explain Error</B> or <B>Explain Warning</B> from the shortcut menu for more information about the error.

status
<B>status</B> is TRUE (X) if an error occurred or FALSE (checkmark) to indicate a warning or that no error occurred.

Right-click the <B>error out</B> indicator on the front panel and select <B>Explain Error</B> or <B>Explain Warning</B> from the shortcut menu for more information about the error.

code
<B>code</B> is the error or warning code.

Right-click the <B>error out</B> indicator on the front panel and select <B>Explain Error</B> or <B>Explain Warning</B> from the shortcut menu for more information about the error.

source
<B>source</B> string describes the origin of the error or warning.

Right-click the <B>error out</B> indicator on the front panel and select <B>Explain Error</B> or <B>Explain Warning</B> from the shortcut menu for more information about the error.

VISA Xsens Out

Delta V (m/s)
Contains the delta velocity value of the SDI output

v.x
Delta velocity in X

v.y
Delta velocity in Y

v.z
Delta velocity in Z

Acceleration (m/s^2)
The calibrated acceleration vector in X, Y, and Z axes

accX
Contains the calibrated acceleration vector in X axes

accY
Contains the calibrated acceleration vector in Y axes

accZ
Contains the calibrated acceleration vector in Z axes

Free Acceleration (m/s^2)
Contains the free acceleration vector in X, Y, and Z axes

freeaccX
Contains the free acceleration vector in X

freeaccY
Contains the free acceleration vector in Y

freeaccZ
Contains the free acceleration vector in Z

Delta Q
Contains the delta quaternion value of the SDI output

q0
Delta quaternion 0

q1
Delta quaternion 1

q2
Delta quaternion 2

q3
Delta quaternion 3

Vitesse angles

roll (rad/s)

pitch (rad/s)

omega

Angles

roll (rad)

pitch (rad)

yaw (rad)

Lecture Xsens.vi
E:\CNES\Stage été 2025 v2\Code principal\Lecture Xsens.vi
Last modified on 31/01/2025 at 14:21
Printed on 20/10/2026 at 14:54

