
Reinitialisation Lidar.vi
E:\CNES\Stage été 2025 v2\Code principal\Reinitialisation Lidar.vi
Last modified on 21/10/2025 at 17:24
Printed on 20/10/2026 at 14:48

Reinitialisation Lidar.vi

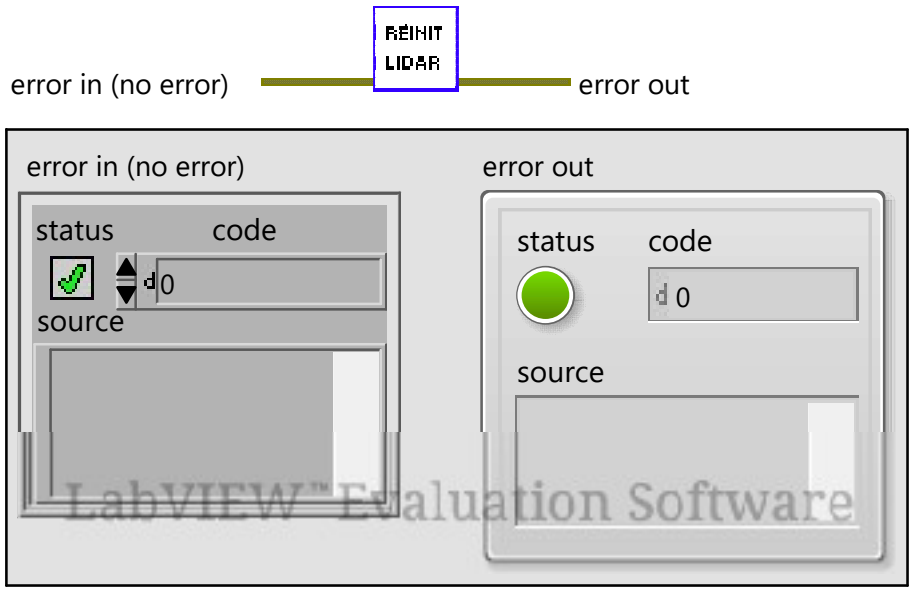

error in (no error)
<B>error in</B> can accept error information wired from VIs previously called. Use this information to decide if any functionality should be bypassed in the event of errors from other VIs.

Right-click the <B>error in</B> control on the front panel and select <B>Explain Error</B> or <B>Explain Warning</B> from the shortcut menu for more information about the error.

status
<B>status</B> is TRUE (X) if an error occurred or FALSE (checkmark) to indicate a warning or that no error occurred.

Right-click the <B>error in</B> control on the front panel and select <B>Explain Error</B> or <B>Explain Warning</B> from the shortcut menu for more information about the error.

code
<B>code</B> is the error or warning code.

Right-click the <B>error in</B> control on the front panel and select <B>Explain Error</B> or <B>Explain Warning</B> from the shortcut menu for more information about the error.

source
<B>source</B> describes the origin of the error or warning.

Right-click the <B>error in</B> control on the front panel and select <B>Explain Error</B> or <B>Explain Warning</B> from the shortcut menu for more information about the error.

error out[error out]
<B>error out</B> passes error or warning information out of a VI to be used by other VIs.

Right-click the <B>error out</B> indicator on the front panel and select <B>Explain Error</B> or <B>Explain Warning</B> from the shortcut menu for more information about the error.

status

RÉINIT LIDAR
Reinitialisation Lidar.vi
E:\CNES\Stage été 2025 v2\Code principal\Reinitialisation Lidar.vi
Last modified on 21/10/2025 at 17:24
Printed on 20/10/2026 at 14:48

I32 **code**

abc **source**

