



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-02	AC

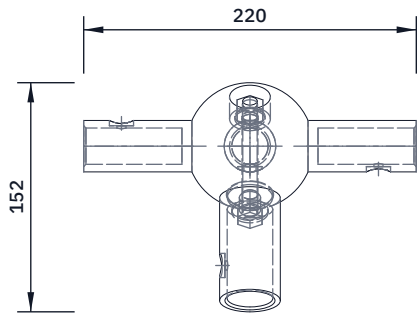


TOP VIEW

Scale 1:5; looking down (along -Z)

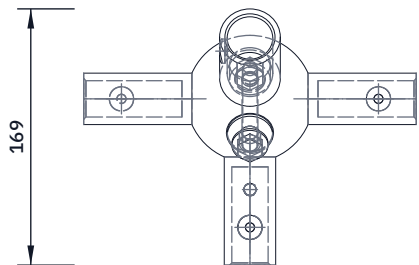

FRONT VIEW

Scale 1:5; looking at the front (along +Y)



RIGHT VIEW

Scale 1:5; looking at the right side (along -X)



WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Print 6, all the same. Four sockets from the 84 mm core:
post straight down (24.0 bore, hitch pin 60 mm from the centre);
rafter inward and up 21.8 degrees (30.1 bore);
two eave tube sockets along the ridge line (24.0 bore).
Every bore 65 mm deep to a flat stop, 1.5 mm mouth chamfer, 6 mm
button hole 85 mm out in a 16 mm finger recess.
Cable bolt hole 10.5 mm through the centre, pointing inward and
35 degrees down; flat spot face 39 mm out on that side, 27 mm
nut recess on the far side, its floor 22 mm from the centre.
Fit: 30 mm washer, 14 x 10 mm spacer with the 6 mm ring on it,
24 mm washer, M10 x 90 bolt; 20 mm washer and nyloc nut in the
recess. Snug plus a quarter turn: do not crush the print.
At the four corners the socket past the gable takes a cap.

SNAPFRAME

github.com/BoujeeEnjinia1701/snapframe

SnapFrame eave node (make 6): making sketch

DRAWING NO. SNF-DWG-103			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 	DATE 2026-10-02		DRAWN Amish Chadha
MATERIAL / NOTES Printed in filled PA12-class nylon, about 287 g; M10 cable bolt set					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand