
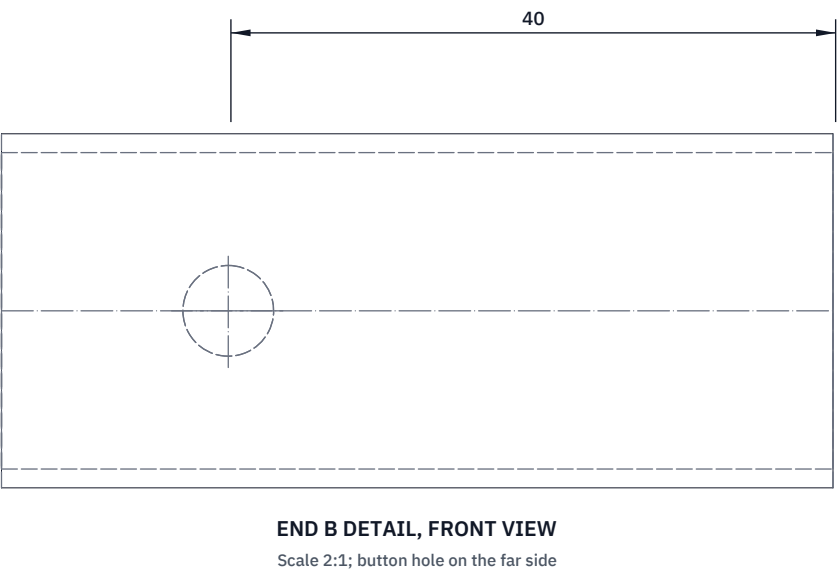
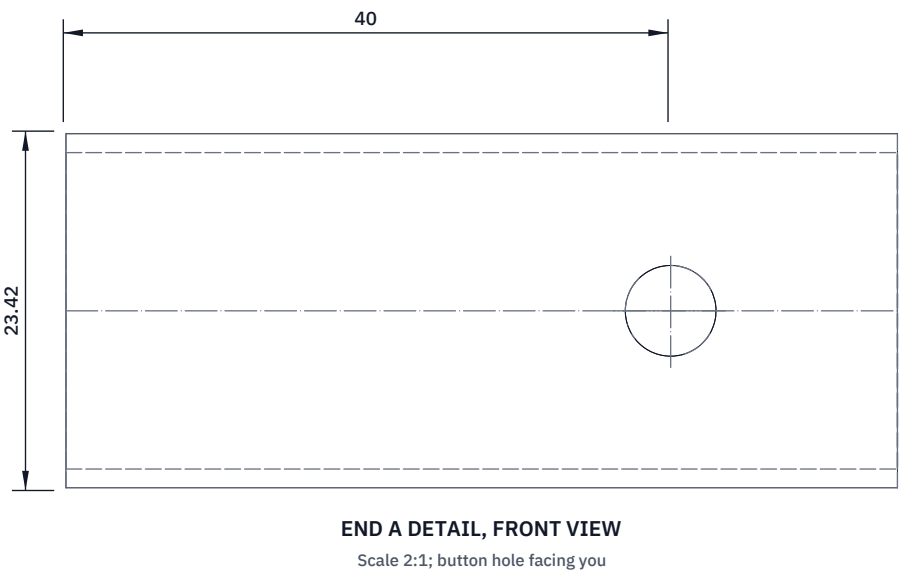
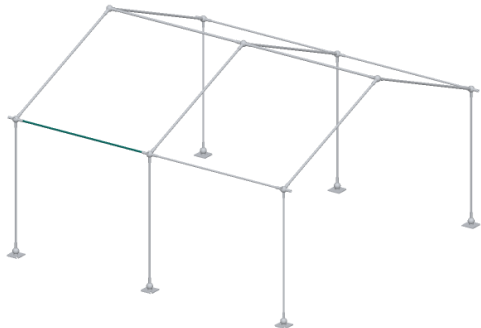


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC

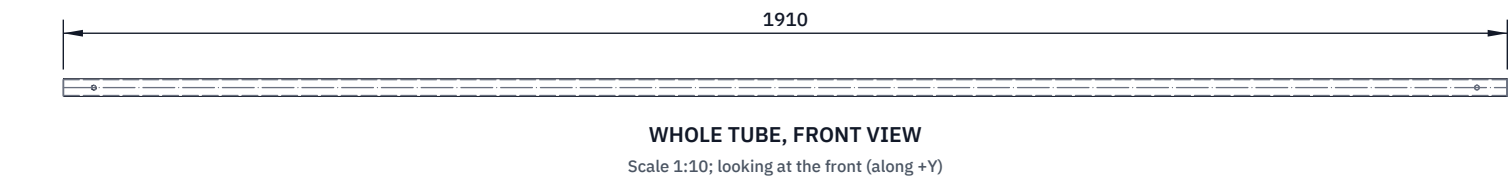

WHERE IT GOES

This part in colour, the rest of the frame in grey

HOW TO MAKE IT AND HOW IT FITS

Cut 4 lengths of 1910 mm from 3/4 in EMT.

Saw square (a pipe cutter or a fine blade); deburr inside and out with a reamer and a file, and wipe clean.

Mark one line along the whole tube with a straight edge. Every hole is on that line: the button hole at end A on the line, the button hole at end B on the opposite side (turn the tube half a turn).

Centre punch, drill 3 mm, then 6 mm for the button holes.

No hitch pin holes in the eave tubes.

Colour band (eave colour) at each end, 70 mm in; it tells them from the posts, which are the same tube.

Fit a 3/4 in snap button in each end until it clicks.

Check: both ends click into eave node sockets.

SNAPFRAME

github.com/BoujeeEnjinia1701/snapframe

SnapFrame eave tube (make 4): making sketch

DRAWING NO. SNF-DWG-107			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:10, ends 2:1	UNITS mm	PROJECTION 	DATE 2026-10-01	DRAWN Amish Chadha	
MATERIAL / NOTES 3/4 in EMT, ANSI C80.3, OD 23.42 x 1.245 mm, one 3.05 m stick each					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com			Generated from cad/src; do not edit by hand		