




REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC




WHOLE TUBE, FRONT VIEW
Scale 1:10; looking at the front (along +Y)

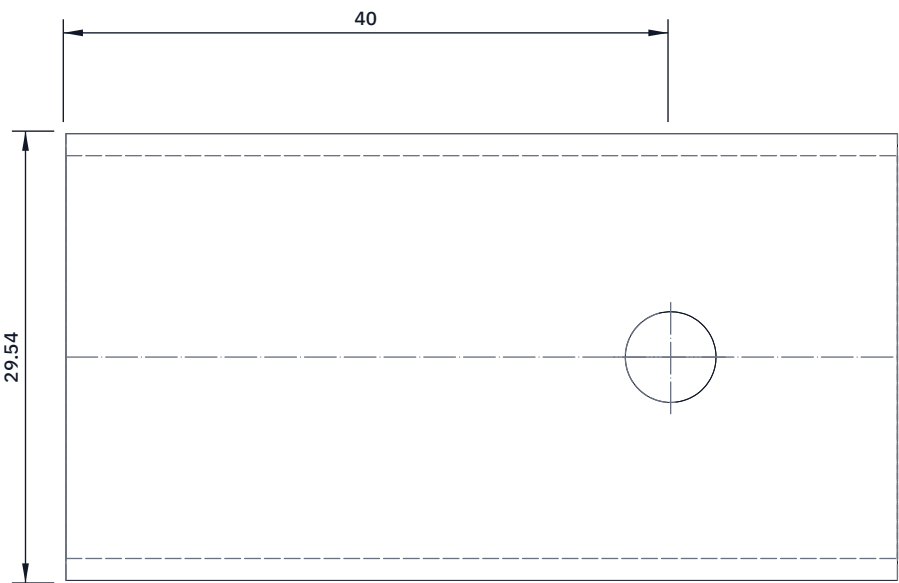

END A DETAIL, FRONT VIEW
Scale 2:1; button hole facing you

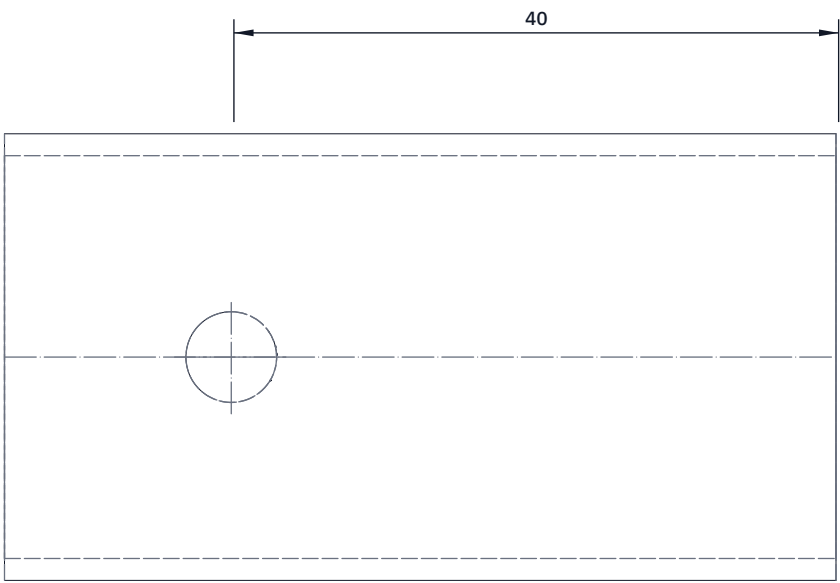

END B DETAIL, FRONT VIEW
Scale 2:1; button hole on the far side

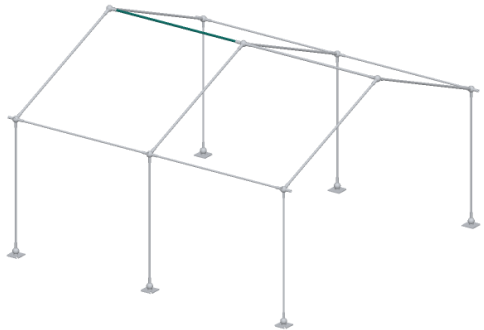

WHERE IT GOES

This part in colour, the rest of the frame in grey

HOW TO MAKE IT AND HOW IT FITS

Cut 2 lengths of 1910 mm from 1 in EMT.
Saw square (a pipe cutter or a fine blade); deburr inside and out with a reamer and a file, and wipe clean.
Mark one line along the whole tube with a straight edge. Every hole is on that line: the button hole at end A on the line, the button hole at end B on the opposite side (turn the tube half a turn).
Centre punch, drill 3 mm, then 6 mm for the button holes.
No hitch pin holes in the ridge tubes.
Colour band (ridge colour) at each end, 70 mm in; it tells them from the rafters, which are the same tube.
Fit a 1 in snap button in each end until it clicks.
Check: both ends click into ridge node sockets.

SNAPFRAME

github.com/BoujeeEnjinia1701/snapframe

SnapFrame ridge tube (make 2): making sketch

DRAWING NO. SNF-DWG-108			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:10, ends 2:1	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES 1 in EMT, ANSI C80.3, OD 29.54 x 1.448 mm, one 3.05 m stick each					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com			Generated from cad/src; do not edit by hand		