BUILD PLAN SKETCH, PLAN NOT YET BUILT

SteamRoot · github.com/BoujeeEnjinia1701/steamroot

REV	DESCRIPTION	DATE	BY
P1	Making sketch for the evaporator bank and dampers	2026-10-02	AC
P2	Top outlet hole moved 145 to the front (STR-DEC-001 S1)	2026-10-24	AC

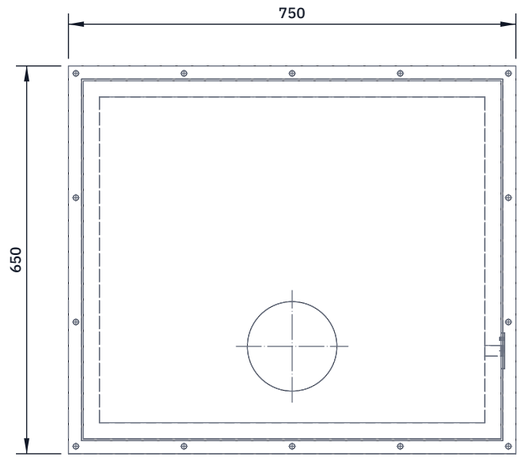

TOP VIEW

Scale 1:10; looking down (along -Z)

FRONT VIEW

Scale 1:10; looking at the front (along +Y)

RIGHT VIEW

Scale 1:10; looking at the right side (along -X)

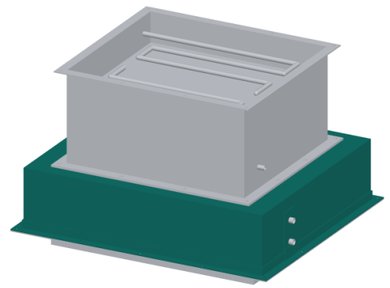

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Walls: 2 mm sheet, 700 x 600 outside (the firebox size), 170 tall, open at the bottom. Top: 2 mm plate welded on, 150 gas outlet hole 145 in front of the centre line, over the roof's hole.

Bottom frame: 25 x 25 x 3 angle round the outside, horizontal leg outward, with 14 holes 9 mm matching the roof bolts.

Weld twelve M8 studs on the top plate for the economizer base.

Tail slot: in the right end, 152 in front of the centre line, 18 wide, from the bottom edge up to 113: the box lowers over the bank tails. A 3 mm cover with two 16.5 holes closes it (2 x M5).

Line the walls with 25 mm blanket and pin 25 mm board under the top.

Fit: on a rope gasket on the roof; the 14 roof bolts clamp it.

Check: the bank tails slide in the cover holes; no light shows.

STEAMROOT

github.com/BoujeeEnjinia1701/steamroot

SteamRoot evaporator bank box: making sketch

DRAWING NO.	REV	SHEET	SIZE
STR-DWG-122	P2	1 of 1	ANSI B

SCALE	UNITS	PROJECTION	DATE	DRAWN
1:10	mm		2026-10-24	Amish Chadha

MATERIAL / NOTES

Mild steel sheet 2 mm; angle 25 x 25 x 3 mm; 25 mm fibre blanket and board

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand