

SWAPCELL · DESIGN PRECIS

SwapCell design precis

Design Molecule Lab · designmolecule.com

DOCUMENT CONTROL

Document ID	SWC-PRC-001	Version	0.7
Status	Draft	Date	2026-10-02
Author	Amish Chadha	License	CERN-OHL-S-2.0
Project TRL	TRL 3 Proof of concept		
Repository	github.com/BoujeeEnjinia1701/swapcell		
Source	docs/02-concept.md @ uncommitted		

REVISION HISTORY

Version	Date	Author	Change
0.7	2026-10-02	Amish Chadha	Approved follow-ups carried out: lid line repriced for polycarbonate sheet (cost USD 619); board temperature sensor on the rear row of cells modelled; GA SWC-DWG-002 Rev P4 shows the handle zone and catch geometry
0.6	2026-10-02	Amish Chadha	Issue SwapCell interface v0.4 (handle zone 84 x 43 mm, catch geometry, reserved LFP chemistry code and coding key); polycarbonate sheet lid for the prototype; partner, LFP and EnergyBus decisions of 2026-10-02
0.5	2026-10-01	Amish Chadha	Constructable design (SWC-DDR-003) latch, fixings and dock; mass and cost updated; budget treated as a value-engineering target
0.4	2026-09-25	Amish Chadha	Recommendations accepted by Amish (DDR-002)
0.3	2026-09-25	Amish Chadha	TRL 3. Issue SwapCell interface v0.3 (wake item W, charge-discharge item C, latch class V1 item V, full CAN bit layout); record Amish's decisions

(SWC-DDR-001); numbers checked against SWC-CAL-001

0.2	2026-09-24	Amish Chadha	Populate to TRL 2 (architecture, interface definition, first-order numbers, safety, media)
0.1	2026-09-24	Amish Chadha	Initial scaffold

SwapCell design precis

SwapCell is a 48 V, 10 Ah lithium-ion pack of 26 cells in a 340 x 90 x 80 mm body that drops, connector first, into a wall dock or a vehicle mount, mates through a floating blind-mate connector, and talks to whatever it is plugged into over CAN. The pack carries its own state-of-health log, so any dock can read its history. The sizing note SWC-CAL-001 confirms that the 13S2P pack of 21700 cells gives about 468 Wh at about 3.0 kg, charges in about 2.3 h on a 5 A dock, and costs about USD 449 in prototype parts, with the dock adding about USD 170. The design was made constructable on 2026-10-01 (SWC-DDR-003, open for Amish's review), and the prototype build plan SWC-BLD-001 shows how it is made. Cycle life (R9) remains at risk. Cell temperature at 20 A (R3) is handled by the temperature derating rule Amish chose on 2026-09-25 (SWC-DDR-002).

The interface (envelope, pinout and message set) is the core deliverable of this precis. This version issues **SwapCell interface v0.4**, which widens the handle zone and publishes the latch catch geometry (Amish, 2026-10-02), on top of v0.3, which added three items Amish approved on 2026-09-25: a wake method for hosts without CAN or a wake supply (item W), a charge-while-discharging mode (item C) and a latch vibration rating for vehicles (item V). PowerBox, SunSpoke, StepGen, WaterWalker, CargoMule, FieldCell and other designs build to it.

SwapCell

github.com/BoujeeEnjinia1701/swapcell

CONCEPT, NOT FOR FABRICATION



Seen from the front right and above, 24 deg elevation. Grey: Wall and adult hand for scale

Figure 1. Pack seated in the wall dock, with a hand on the carry handle for scale. Rendered from the parametric model `cad/src/model.py`.

■ How it works

1. **Dock.** The pack hangs connector end down in a wall cradle. Side guides bring it within the connector's capture range, gravity seats it, and a spring-loaded pawl on the back face snaps out under a catch on the cradle.
2. **Mate and wake.** The blind-mate connector makes contact in sequence: ground first, then power and CAN, and a short interlock pin last. The receiver's 10 k Ω coding resistor in the INTERLOCK loop wakes a sleeping pack without any supply from the host. Until the pack has checked that loop, the output is dead.
3. **Handshake.** The dock controller (ESP32 with a CAN transceiver) sends a heartbeat. The pack answers with its identity, limits and state of health. If the pack reports no fault and a charge limit of at least 5 A, the dock switches its certified 54.6 V, 5 A charger onto the pack.
4. **Charge and log.** The BMS balances cells, limits charge by temperature and records each cycle. The dock copies new cycle records to its SD card and exports them as CSV.
5. **Swap.** The rider lifts the pack by the handle, releases the latch with the same hand, and slides it into the vehicle mount, which mirrors the dock cradle and closes an over-centre lever to hold the pack against vibration (latch class V1). The vehicle controller runs the same handshake, and the pack enables its output. A vehicle without CAN gets legacy discharge-only output at 15 A.
6. **Charge while in use.** A station host such as PowerBox, or a vehicle that recovers energy, requests the charge-discharge mode and may push current into the pack while drawing from it, within the limits the pack publishes.

SwapCell: energy per full cycle, grid or solar to wheel (estimates)

github.com/BoujeeEnjinia1701/swapcell

CONCEPT, NOT FOR FABRICATION

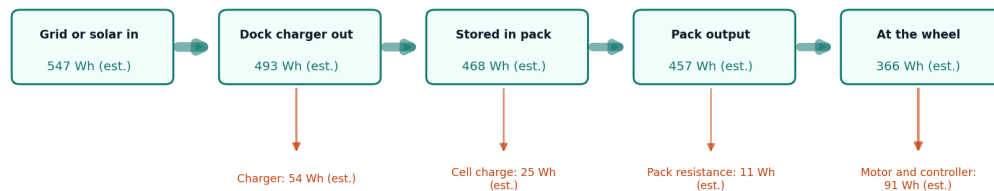


Figure 2. Energy per full charge and discharge, grid or solar to wheel. All values are estimates from SWC-CAL-001.

■ Main components

#	Component	Proposed choice	Notes
1	Pack housing tray	Folded 1.5 mm 5052 aluminium, open front, flame-retardant liner, riveted latch doubler	Carries the latch and handle loads; spreads heat. Decided by Amish, 2026-09-25
2	Cell block	26 x 21700 cells, 13S2P, 5.0 Ah nominal (4.85 Ah minimum) and 3.6 V each, 25 A continuous rating	Cells in holders with fuse-wire links. Decided by Amish, 2026-09-25
3	BMS board	Open-source 13S BMS with CAN, balancing, 30 A continuous FETs, pre-charge, flash log, 100 μ A sleep with INTERLOCK wake	Stands beside the cells on its long edge
4	Pack lid	Flame-retardant polymer (UL 94 V-0 grade) on a flat gasket, eight countersunk screws into press-in nuts in the tray's front flanges, flush sealed wake button	Removable for repair
5	Blind-mate plug, pack side	2 power contacts (40 A) plus 6 potted signal contacts in a keyed shroud	Fixed to the pack; custom keyed shroud with commercial contacts, decided 2026-09-25 (SWC-DDR-002)
6	Carry handle	Printed or moulded loop over the top end, 25 mm grip clearance, two screws from inside	Sized for a gloved hand
7	Latch pawl	Steel pawl sliding through the back wall in a riveted steel housing (the doubler), 6 mm proud, hooking 4 mm under the catch; a thumb button just behind the grip drives a ramped slider that pulls it in 5 mm; 1.72 kN proof load	Same catch geometry on dock and vehicle (SWC-DDR-003)
8	Wall dock cradle	12 mm aluminium back plate, printed cradle shelf with connector pocket, printed side guides with lead-ins and a steel latch catch, each screwed from behind the plate	Wall-mounted at 0.8 to 1.2 m
9	Blind-mate receptacle, dock side	Mating half captured under the shelf pocket on a foam pad, floating ± 3 mm and $\pm 2^\circ$, 10 k Ω INTERLOCK coding resistor	Replaceable wear part
10	Dock charger	Certified 54.6 V, 5 A CC-CV lithium-ion charger, settable to 53.3 V for fleet mode	Off-the-shelf; no custom mains electronics. Decided by Amish, 2026-09-25
11	Dock controller	ESP32 with CAN transceiver, charger relay, current sensor and SD card	Runs the handshake and exports logs

Item 12 (fuses, pre-charge and wiring) is in the BOM but not modelled, apart from the battery board's temperature sensor on the rear row of cells; the label of item 14 is not modelled; items 13 (seals and fixings), 15 (latch housing and release), 16 (cell holder frames) and 17 (dock mounting parts) are modelled and shown in the build plan. Numbers match `bom/bom.csv` and Figure 4. The general arrangement is drawing SWC-DWG-002 (`cad/drawings/SWC-DWG-002.pdf`), generated from `cad/src/model.py` .

■ Key numbers

All values come from SWC-CAL-001 (docs/04-calcs/sizing.py) and are paper estimates. Cell assumptions: 5.0 Ah nominal and 4.85 Ah minimum, 3.6 V nominal, 3.0 to 4.2 V, about 69 g, about 12 mΩ DC internal resistance, 25 A continuous, about \$5.50 in small quantity.


Quantity	Value	Basis	Requirement
Configuration	13S2P, 26 cells	Decided by Amish, 2026-09-25	
Voltage	46.8 V nominal, 39.0 to 54.6 V	13 x 3.6 V; 13 x 3.0 to 4.2 V	R1 met
Capacity and energy	10.0 Ah and about 466 Wh at 0.2C; 9.7 Ah and 452 Wh at cell minimum	2 x 5.0 Ah less sag	R2 at risk at cell minimum
Pack resistance	about 110 mΩ	13 groups x 6 mΩ, plus 32 mΩ for links, fuse wires, FETs, shunt and connector	
Cell current	10 A continuous, 17.5 A peak	20 A and 35 A over 2 cells; rated 25 A	R3 electrically met
Cell hot spot, 20 A full discharge	about 51 °C in open air, 63 °C enclosed, 71 °C from 45 °C ambient	Lumped model, UA 1.17 W/K, τ 33 min	R3 met on paper with derating (SWC-DDR-002)
Heat at 10 A (typical e-bike)	about 11 W	I ² R	
Voltage sag	about 2.2 V at 20 A, 3.9 V at 35 A	I x 110 mΩ	
Mass	about 3.03 kg (6.7 lb)	Cells 1.79 kg, tray 0.43, lid 0.11, interconnects 0.18, BMS 0.12, plug 0.06, handle and pawl 0.13, latch housing and release 0.11, seals, fixings and button 0.10	R5 met
Body and overall size	340 x 90 x 80 mm; 393 mm with handle and plug	Parametric model	R6 met
Energy density	about 154 Wh/kg, about 191 Wh/L	468 Wh over 3.03 kg and 2.45 L	
Charge time at 5 A	about 2.3 h to full; 1.6 h to 80 %; 1.2 h for 20 to 80 %	CC to 85 % in 1.7 h, then about 0.6 h CV	R4 met
Dock input power	about 303 W in CC	54.6 V x 5 A at 90 %	
Energy per cycle	about 547 Wh from grid or solar, about 457 Wh at the pack terminals	Figure 2	
Range	about 38 to 57 km (e-bike), 18 to 30 km (loaded cargo trike)	457 Wh at 12 to 8 Wh/km and 25 to 15 Wh/km	
Cell cost	about \$143, \$0.31/Wh	26 x \$5.50	
Parts cost	about USD 449 per pack, USD 170 per dock, USD 619 total	bom/bom.csv	R16: USD 81 under the USD 700 value-engineering target

Quantity	Value	Basis	Requirement
Cycle life	about 300 to 500 cycles to 80 %	Typical for the cell class; higher in 4.1 V fleet mode	R9 at risk
Sleep drain	about 0.72 % per month at 100 μ A	Interface v0.3 item W	R13 met on paper
CAN bus load	about 1.8 % (one pack), 3.1 % (two packs)	34.1 frames/s at 135 bits	R12 met on paper

SwapCell: cutaway

github.com/BoujeeEnjinia1701/swapcell

CONCEPT, NOT FOR FABRICATION

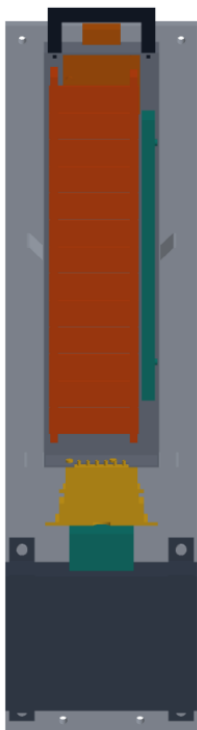

Front half removed; seen from the front and above, 18 deg elevation

Figure 3. Section through the docked pack: cells (2) with their axes across the width, BMS board (3) beside them, plug (5) in the dock receptacle (9).

■ **Interface definition**

This section is the **SwapCell interface, version 0.4** (draft, 2026-10-02). Amish approved v0.2 as written and the three v0.3 additions on 2026-09-25 (SWC-DDR-001), and the v0.4 changes of Table 1a on 2026-10-02 (SWC-DDR-003, A1 and A2; SWC-DEC-001). The specific values inside the additions (marked †) were engineering

proposals; Amish confirmed them on 2026-09-25 (SWC-DDR-002). Other portfolio designs build to this section, cite it as "SwapCell interface v0.4", and flag any conflict to this repo rather than change it locally. Changes need Amish's approval.

Table 1. Changes from v0.2.

Item	Change	Why	Requirement
W	Wake on a coded INTERLOCK loop (10 kΩ† to SGND in every receiver), plus a manual wake button; WAKE pin kept but optional	Battery-only and non-CAN hosts (PowerBox, legacy vehicles) have no wake supply	R13
C	Requested mode 4, charge-discharge; host type 3, station; host charge limit in HOST_HEARTBEAT	PowerBox runs loads while charging from solar; vehicles may recover energy	R14
V	Latch classes: D (gravity dock) and V1 (vehicle), with a proof load, preload and vibration profile	Vehicles shake; v0.2 had only a 3 g placeholder	R15
L	Full CAN bit layout (Table 3) and interface version in PACK_STATUS	TRL 3 work listed in the TRL 2 review	R12

Table 1a. Changes from v0.3 (2026-10-02).

Item	Change	Why	Requirement
H	Handle zone widened to 84 x 43 mm, from the zone's front edge to the back face	The thumb button sits behind the v0.3 zone; receivers must leave it clear	R6
K	Catch geometry published: latching face 1 mm above the pawl, reach 8 mm from a plate 10 mm behind the pack, 4 mm engagement, 1 mm clear when retracted; pawl projection 6 mm, travel 5 mm	Every receiver must latch the same way	R15
X	A chemistry code in the message set and a connector coding key are reserved for a 16S LFP variant, so an LFP pack can never take an NMC charge or the reverse; values and key geometry are assigned when an LFP variant is designed	Full charge differs (about 58.4 V for 16S LFP, 54.6 V for 13S NMC)	R12

Mechanical envelope

Feature	Value	Notes
Body	340 x 90 x 80 mm, +0 / -1.5 mm	Length along the insertion axis
Datum	Connector face (pack underside); insertion along the long axis, connector first	Same in dock and vehicle mount
Connector position	Centred across the 90 mm width, 8 mm toward the back face from the depth centre line	Keeps the plug clear of the lid seam
Guide faces	The two 340 x 80 mm side faces, 90 mm apart	Receiver guides with 1 mm clearance per side and a 10 mm lead-in
Latch	Pawl on the back face, 45 mm below the top end, 36 mm wide, 4 mm tooth, 6 mm projection, 5 mm travel; engages a catch on the receiver whose latching face is 1 mm above the pawl, reaching 8 mm from a plate 10 mm behind the pack, for 4 mm of engagement (v0.4)	Proof load 1.72 kN† along the insertion axis
Handle zone	Up to 35 mm above the top end, 84 x 43 mm footprint, from the zone's front edge to the back face (v0.4)	Receivers leave this zone clear, including the thumb button
Wake button	Flush in the lid (front) face, 12 mm, 70 mm below the top end	New in v0.3; inside the envelope
Orientation	Any; the latch, not gravity, retains the pack in a vehicle	Dock uses gravity to seat
Mass limit for receivers	3.5 kg pack	R5
Airflow	Vehicle receivers leave the back and lid faces open to air where possible	The full 20 A rating applies in an open-air mount; enclosed, the pack derates to about 18.6 A (R3)

Latch classes (item V). *Class D* (gravity dock): the pack seats under its own weight; the latch only stops it being knocked out. *Class V1* (vehicle): the receiver and the pack latch together hold the pack with no latch release and no power-contact interruption of 1 ms or longer under the sinusoidal vibration profile of UN 38.3 test T3 (7 to 200 Hz, peak 8 g, three axes) and 25 g†, 11 ms half-sine shocks, three in each direction on each axis. The receiver preloads the pack against its end stop with at least 330 N† through an over-centre lever (ratio 6.6 or more, hand force 50 N or less), so the contacts do not chatter at 8 g; the lever has a detent so it cannot open under vibration. The pack latch withstands a static 1.72 kN proof load along the insertion axis without permanent set. Verification is by test at TRL 4, which is on hold.

Connector pinout

Two power contacts and six signal contacts in a keyed shroud that only mates one way round. Mating order is set by contact length.

Pin	Signal	Rating	Mates	Function
P1	PACK+	40 A continuous	2nd	Pack positive, behind the BMS FETs; dead until enabled
P2	PACK-	40 A continuous	1st	Pack negative
S1	SGND	1 A	1st	Signal ground and CAN reference, joined to PACK- inside the pack
S2	CAN_H	Signal	2nd	CAN 2.0B, 250 kbit/s; 120 Ω termination in the host, not the pack
S3	CAN_L	Signal	2nd	As above
S4	WAKE	5 to 15 V, 10 mA	2nd	Optional in v0.3. A host may drive it high to wake the BMS or hold it awake
S5	AUX	12 V, 1 A (reserved)	2nd	Proposed low-power output for lights or a dock display; off by default
S6	INTERLOCK	Signal, 3.3 V, 30 μ A	3rd (last)	v0.3: loops to SGND through a 10 k Ω $\pm$ 1 % coding resistor in every receiver. The pack accepts 8.0 to 12.5 k Ω (node 0.24 to 0.37 V); a short, an open loop or any other value keeps the output dead. It is also the wake source (item W)

Wake and sleep (item W)

In sleep the BMS draws 100 μ A† or less and holds INTERLOCK at 3.3 V through 100 k Ω , with a comparator armed. The pack wakes on any of: INTERLOCK falling below 1.0 V, WAKE driven high, the manual button, or (optionally) CAN activity. Awake, it measures the INTERLOCK resistance. If the loop is valid, it goes to standby and waits for a heartbeat; if not, it sets a warning, keeps the output dead and sleeps again after 60 s, re-arming only when the node returns high, so a coin or water across the contacts cannot hold it awake. With no heartbeat, no current and a valid loop, the pack sleeps after 10 min unless a host holds WAKE high or sets the keep-awake flag. A host without CAN (legacy mode) therefore needs nothing but the coding resistor.

CAN message set

CAN 2.0B controllers at 250 kbit/s, 11-bit identifiers. Each pack has a node number n from 0 to 7 (default 0) so a vehicle can carry two packs; identifiers below are base values plus n . All signals are little-endian unsigned integers unless marked signed. Current is positive out of the pack.

Table 2. Messages.

ID (base)	Message	Direction	Rate
0x100	PACK_STATUS	Pack to host	10 Hz
0x110	PACK_LIMITS	Pack to host	10 Hz
0x120	CELL_SUMMARY	Pack to host	1 Hz
0x130	TEMPERATURES	Pack to host	1 Hz
0x140	FAULTS	Pack to host	On change and 1 Hz
0x150	STATE_OF_HEALTH	Pack to host	0.1 Hz
0x160	IDENTITY	Pack to host	On request (remote frame or HOST_HEARTBEAT flag)
0x180	HOST_HEARTBEAT	Host to pack	10 Hz
0x190	CHARGER_STATUS	Dock or station to pack	1 Hz
0x1F0 / 0x1F8	LOG_REQUEST / LOG_DATA	Dock to pack / pack to dock	On request; segmented transfer in the style of ISO 15765-2

Table 3. Bit layout (8 data bytes per frame; byte 0 first).

Message	Bytes	Signal	Scale and range
PACK_STATUS	0 to 1	Pack voltage	10 mV, 0 to 655.35 V
	2 to 3	Pack current, signed	100 mA, $\pm 3,276.7$ A
	4	State of charge	0.5 %, 0 to 100 %
	5	State	0 sleep, 1 standby, 2 discharge, 3 charge, 4 charge-discharge, 5 legacy discharge, 6 fault
	6	Flags	bit 0 INTERLOCK valid, 1 heartbeat valid, 2 discharge FET on, 3 charge FET on, 4 pre-charge active, 5 to 6 wake source (0 INTERLOCK, 1 WAKE, 2 button, 3 CAN), 7 fleet mode
	7	Counter and version	bits 0 to 3 rolling counter, bits 4 to 7 interface minor version (4 for v0.4)
PACK_LIMITS	0 to 1	Allowed discharge current	0.1 A
	2 to 3	Allowed charge current	0.1 A; 0 below 0 °C and above 45 °C cell temperature
	4 to 5	Maximum charge voltage	10 mV (54.60 V standard, 53.30 V fleet)
	6 to 7	Minimum pack voltage	10 mV
CELL_SUMMARY	0 to 1, 2	Minimum cell voltage, group index	1 mV; 0 to 12
	3 to 4, 5	Maximum cell voltage, group index	1 mV; 0 to 12
	6 to 7	Imbalance	1 mV
TEMPERATURES	0, 1	Minimum and maximum cell temperature, signed	1 °C
	2, 3	FET and connector temperature, signed	1 °C
	4, 5	Sensor index of minimum and maximum	0 to 255
	6 to 7	Reserved	0
FAULTS	0 to 3	Fault bits	0 cell overvoltage, 1 cell undervoltage, 2 discharge overcurrent, 3 charge overcurrent, 4 short circuit, 5 over-temperature, 6 under-temperature charge, 7 INTERLOCK invalid, 8 heartbeat lost, 9 pre-charge failed, 10 FET failure, 11 cell imbalance, 12 isolation or water ingress, 13 to 31 reserved
	4 to 5	Warning bits	Same order as faults, early warning thresholds
	6	Seconds until disconnect	1 s; 255 = none pending
	7	Rolling counter	0 to 255

Message	Bytes	Signal	Scale and range
STATE_OF_HEALTH	0	SoH	0.5 %
	1 to 2	Full-charge capacity	10 mAh
	3 to 4	Cycle count	1
	5 to 6	Lifetime throughput	10 Ah
	7	Resistance estimate	1 mΩ, 0 to 255
IDENTITY	0	Page	0 to 3
	1 to 7	Page 0: interface major and minor, chemistry code, series count, parallel count, rated capacity (0.1 Ah, 2 bytes); pages 1 and 2: serial number (14 ASCII bytes); page 3: firmware version	
HOST_HEARTBEAT	0	Host type	0 vehicle, 1 dock, 2 tester, 3 station (new in v0.3)
	1	Requested mode	0 sleep, 1 standby, 2 discharge, 3 charge, 4 charge-discharge (new in v0.3)
	2 to 3	Host discharge current limit	0.1 A
	4 to 5	Host charge current limit	0.1 A (new in v0.3)
	6	Flags	bit 0 fleet mode, 1 keep awake, 2 request IDENTITY, 3 to 7 reserved
	7	Rolling counter	0 to 255
CHARGER_STATUS	0 to 1, 2 to 3	Charger voltage and current capability	10 mV, 0.1 A
	4 to 5, 6 to 7	Measured output voltage and current	10 mV, 0.1 A

Behavior rules

- **Enable.** The pack enables any output only with a valid INTERLOCK loop. Discharge needs a heartbeat requesting mode 2 or 4; charge needs a heartbeat from a dock, station or vehicle requesting mode 3 or 4. A heartbeat is valid while its counter advances at least every 300 ms.
- **Legacy mode (decided).** If INTERLOCK is valid and no heartbeat arrives within 2 s, the pack enables discharge only, limited to 15 A, and never charges or enters mode 4.
- **Charge-discharge mode (item C).** In mode 4 both FETs are on and current may flow either way. The host keeps net charge current at or below the lower of its own charge limit and the pack's allowed charge current, and the pack terminal voltage at or below the maximum charge voltage. The pack enforces its limits: on a charge-side fault (charge overcurrent, a cell near overvoltage, or cell temperature below 0 °C or above 45 °C) it sets allowed charge current to zero, warns, and after 1 s opens only the charge FET, so discharge continues through that FET's body diode and the load stays powered. Mode changes between 2, 3 and 4 never open the output.

- **Temperature derating (R3, decided 2026-09-25).** PACK_LIMITS allows the full 20 A continuous discharge while the hottest cell is at or below 50 °C, then lowers the allowed discharge current linearly to 5 A at 60 °C. The 35 A, 10 s peak is allowed only below 50 °C. Hosts must follow PACK_LIMITS; a legacy host is already held to 15 A and gets the same ramp. The pack sustains about 18.6 A in an enclosed mount from 25 °C and about 14 A in open air from 45 °C (SWC-CAL-001 v0.2).
- **Warn, then derate.** For a non-fatal fault the pack first warns and ramps its current limit down over about 5 s, so a rider is not left without power mid-junction. It opens immediately only for short circuit, cell overvoltage or over-temperature beyond the hard limit.
- **Removal.** When INTERLOCK opens (it breaks first on removal), the pack opens its output within 1 ms, before the power contacts separate.

State-of-health log. One 32-byte record per charge or discharge event: dock timestamp, Ah in and out, minimum and maximum temperature, peak current, minimum cell voltage, capacity and resistance estimates. 2,000 records need 64,000 bytes, which fits in the BMS microcontroller flash or a small SPI flash and transfers in about 10 s (R12).

EnergyBus gateway. Decided: an open SwapCell profile now, with a gateway study. The study is not complete. A gateway (an ESP32 translating between the two message sets) looks feasible in principle, since both carry voltage, current, limits and state, but a message-by-message mapping needs the CiA 454 specification, which is distributed through a membership organization and was not read for this version.

■ Key design choices

All of these were decided by Amish on 2026-09-25 (go with recommendation), SWC-DDR-001, unless marked otherwise.

- **13S2P of 5 Ah 21700 cells.** Meets 10 Ah with 26 cells and 52 welds. A 13S4P "double" pack (about 900 Wh, about 5 kg) is a later variant in a longer envelope.
- **Aluminium tray with a flame-retardant lid (3 mm UL 94 V-0 polycarbonate sheet for the prototype, decided 2026-10-02; a printed V-0 lid remains allowed).** Metal spreads heat, resists a cell fire longer than a printed shell and carries the 1.72 kN latch proof load through a riveted doubler.
- **Floating blind-mate connector with a dead pack output and a coded interlock.** Sequenced contacts and a last-mate, resistor-coded interlock keep the output off until the pack is seated in a real receiver, avoid arcing on insertion and let a receiver wake the pack.
- **Own open message set, with an EnergyBus gateway study.** Short, published and easy to implement on an ESP32 or a hobby controller.
- **Legacy mode for vehicles without CAN.** Discharge only, fixed at 15 A.
- **The log lives in the pack.** Any dock, anywhere, can read a pack's history without a shared server.
- **Certified charger, switched by the dock.** The dock builds no mains electronics; charge current is fixed at 5 A.
- **Fleet charge mode.** The dock may set 4.1 V per cell (53.3 V) for longer life at about 10 % less energy.
- **Interface governance.** This section is the versioned interface; Amish approves changes.
- **Solar DC dock variant.** A second dock with a 48 V DC input (via PowerBox) follows the mains dock; not designed at TRL 3.
- **Connector family (decided 2026-09-25, SWC-DDR-002).** A custom printed keyed shroud around commercial high-current socket contacts and potted spring signal contacts, rather than a commercial blind-mate connector, because it keeps the published geometry independent of one vendor; the contacts are bought and replaceable.

The specific contact parts are chosen at supplier selection. R8 and R10 depend on them and are verified at TRL 4, which is on hold.


- **R3 thermal rating (decided 2026-09-25, SWC-DDR-002).** Keep 20 A continuous at 25 °C with the temperature derating rule above, rather than labelling the pack 15 A.
- **Values inside items W, C and V (confirmed 2026-09-25, SWC-DDR-002).** 10 kΩ coded INTERLOCK, 100 µA sleep limit, 25 g shock, 330 N receiver preload, and the charge-FET fallback on a charge-side fault.

SwapCell: exploded view

github.com/BoujeeEnjinia1701/swapcell

CONCEPT, NOT FOR FABRICATION

- 1 Pack housing tray
- 2 Cell block, 13S2P 21700
- 3 BMS board with CAN
- 4 Pack lid and wake button
- 5 Blind-mate plug, pack side
- 6 Carry handle
- 7 Latch pawl and release
- 8 Wall dock cradle
- 9 Blind-mate receptacle, dock side
- 10 Dock charger, 54.6 V 5 A
- 11 Dock controller (ESP32, CAN)

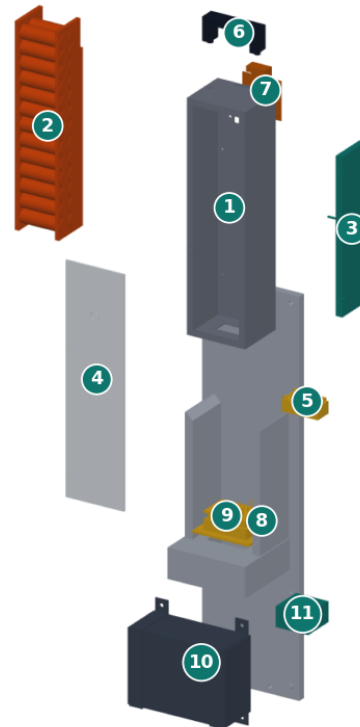

Seen from the front right and above, 24 deg elevation; numbers match bom/bom.csv

Figure 4. Exploded view with callouts numbered as in the components table and bom/bom.csv .

■ Safety

Safety: SwapCell is a 468 Wh lithium-ion pack. A cell in thermal runaway vents flammable, toxic gas and can ignite its neighbours; a pack fire is hard to extinguish and can re-ignite hours later. Treat every pack as a fire hazard at all stages.

- **Thermal runaway.** Use new cells from a reputable distributor, with matched capacity and resistance. Space cells in holders (about 1 mm gaps) and consider a mica or intumescent barrier between groups; line the tray with a flame-retardant sheet; give the housing a vent path that directs gas away from the handle and the user.

Propagation resistance was not analyzed at TRL 3 and can only be shown by test, which is TRL 4 work and on hold.

- **Cell-level fusing.** Each cell connects to its bus through a fuse wire or fusible link sized to carry 17.5 A peak without damage but to open on the fault current of an internally shorted neighbour. A 40 A main fuse sits in series with PACK+.
- **BMS protections (R11).** Cell overvoltage and undervoltage, charge and discharge overcurrent, short-circuit trip within 500 μ s, over-temperature, no charging below 0 °C, pre-charge of the host's input capacitors, and an output that stays off until the interlock closes. Exposed pack contacts are at up to 54.6 V DC and can deliver hundreds of amperes into a short, so the dead-output rule is a safety requirement, not a convenience.
- **Coded interlock (v0.3).** A bare link or a coin across INTERLOCK and SGND reads as a short and never enables the output, even in legacy mode. Receivers must fit the 10 k Ω coding resistor; a receiver that shorts the loop simply does not work, which fails safe.
- **Charge-discharge mode (v0.3).** A host that pushes current into a pack is a charger. The pack refuses charge below 0 °C and above 45 °C and opens only its charge FET on a charge-side fault, so the load stays powered and the cells are protected. Hosts must still limit their own charge current and voltage.
- **Pack retention in vehicles (v0.3).** A pack that leaves its mount at speed is a 3 kg projectile with live contacts. Vehicle receivers must meet latch class V1, with an over-centre lever that cannot open under vibration.
- **Loss of power while riding.** A pack that cuts out suddenly can cause a fall. The warn-then-derate rule in the message set applies to every fault except the hard ones.
- **Dock location.** Mount docks on a non-combustible wall, away from exits and escape routes, with a smoke alarm nearby. Do not charge packs that have been dropped, crushed or wetted until they have been inspected.
- **Transport rules.** At about 468 Wh the pack is well above 100 Wh, so it ships as Class 9 dangerous goods (UN 3480 alone, UN 3481 in or with equipment), needs a UN 38.3 test summary before commercial shipping, cannot travel in passenger air baggage, and by air generally has to ship at 30 % state of charge or less. Moving prototype packs by road between workshops still needs terminal protection and a rigid, non-conductive container.
- **Building and testing.** Build, charge and test prototype packs only inside a fireproof enclosure (a steel cabinet or a purpose-made battery containment box) on a non-combustible surface, with a Class D or lithium-rated extinguisher and a sand bucket at hand, and never unattended. Use insulated tools, cover exposed bus bars, and build the pack one series group at a time with the BMS disconnected until wiring is checked.
- **Standards.** EN 50604-1 and UL 2271 (light-vehicle batteries), UL 2849 (e-bike electrical systems) and IEC 62133-2 are future compliance targets. Nothing here is certified.

■ Open questions

Every open item, with options and recommendations, is tracked in the design decisions register SWC-DEC-001 ([06-design-decisions.md](#)); the list below is a summary.

Items that remain open after SWC-DDR-002. None of them is TRL 4 work to be started now; TRL 4 is on hold by Amish's instruction.

- **Cell model (R9).** Which 5 Ah 21700 cell balances cycle life against current rating needs datasheet review against named cells; R9 stays at risk until then.
- **LFP variant.** A 16S LFP pack (about 51 V nominal, up to 58.4 V) would be safer and longer lived but heavier. PACK_LIMITS already allows a different voltage window. Decided 2026-10-02: not added now; a chemistry code and a coding key are reserved in interface v0.4 so an LFP pack can never take an NMC charge or the reverse.

- **EnergyBus mapping.** Deferred (2026-10-02): the native SwapCell profile stays the reference; CiA 454 is read only when a partner needs EnergyBus.
- **First co-design partner.** Left open under the portfolio rule, but an urban cargo-bike or e-bike delivery fleet is approached first, with a repair workshop second (decided 2026-10-02). Nothing is agreed.
- **Build budget for a second pack.** Decided 2026-09-25 to settle it before any build (about USD 1,068 for two packs and one dock with the constructable design); on hold with TRL 4.

Concept media: [blueprint sheet](#), [interactive 3D model](#).