



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC

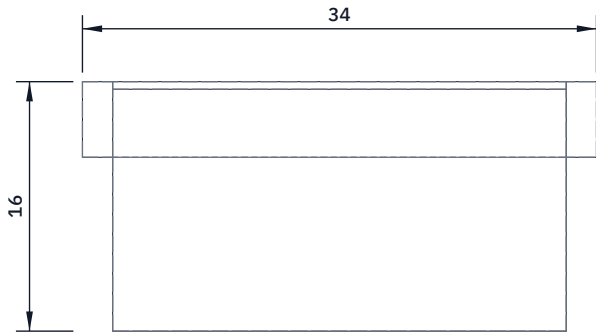


TOP VIEW

Scale 2:1; looking down (along -Z)

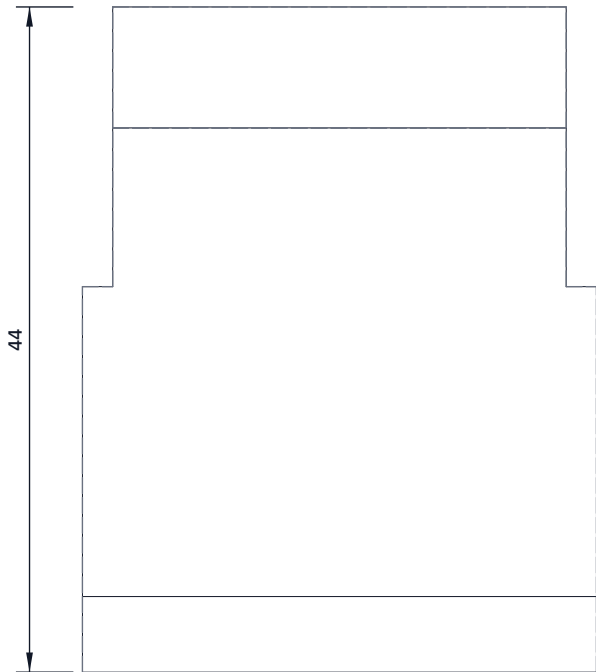

FRONT VIEW

Scale 2:1; looking at the front (along +Y)

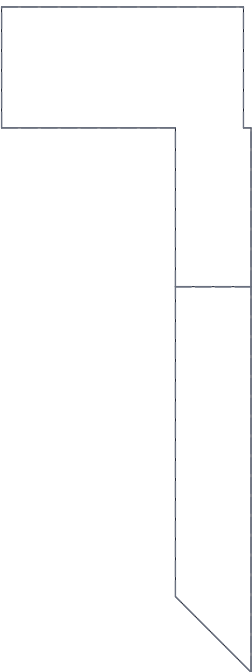

RIGHT VIEW

Scale 2:1; looking at the right side (along -X)



WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Slider: a steel bar 5 thick, 34 wide for its lower 25.5 mm and 30 wide for the 10.5 mm above (file the steps), 36 long in all.

File the lower end to a 45 degree ramp across the full 5 mm, sloping up toward the lid side, to match the pawl's ramp.

Drill and tap M3, 6 deep, in the top end.

Button: print 30 x 16 x 8 in the same plastic as the handle, with a 3.4 hole through, counterbored from the top for the screw.

Fit: the slider goes up through the tray top from inside, flat against the back wall; the wide part stops under the tray top so it cannot come out. The button screws on top, 8 above it.

Press: the ramp wedges between the wall and the pawl and pulls the pawl in 5 mm. The pawl springs push it back up.

Check: 5 mm of button travel retracts the tooth flush.

SWAPCELL

github.com/BoujeeEnjinia1701/swapcell

SwapCell release slider and thumb button: making sketch

DRAWING NO. SWC-DWG-104		REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 2:1	UNITS mm	PROJECTION 	DATE 2026-10-01	DRAWN Amish Chadha
MATERIAL / NOTES Steel flat bar 35 x 5 mm; printed button				
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com			Generated from cad/src; do not edit by hand	