

THERMABRICK · DESIGN PRECIS

ThermaBrick test article design precis

Open Hardware Portfolio · amishchadha.com

DOCUMENT CONTROL

Document ID	TBK-PRC-002	Version	0.11
Status	Draft	Date	2026-09-24
Author	Amish Chadha	License	CERN-OHL-S-2.0
Project TRL	TRL 3 Proof of concept		
Repository	github.com/BoujeeEnjinia1701/thermabrick		
Source	docs/06-test-article.md @ a07b0c2		

REVISION HISTORY

Version	Date	Author	Change
0.11	2026-09-24	Amish Chadha	Review pass: the \$727.70 budget returned to proposed, awaiting Amish (accepted budget remains \$635.70); controller board marked optional and deferred
0.10	2026-09-24	Amish Chadha	Added the four items the build procedure found to the BOM (second stone wool pack, heater cable, wiring consumables, thermocouple extension); budget now \$727.70
0.9	2026-09-24	Amish Chadha	Build section now points to the build procedure and cut list; corrected the well cut length (692 mm), the envelope height (1,688 mm) and the thermocouple height (300 mm above the drum floor); listed the open items the build procedure found
0.8	2026-09-24	Amish Chadha	Recorded the decision to accept \$635.70 as the test article budget
0.7	2026-09-24	Amish Chadha	Added the controller enclosure (TBK-DWG-005 Rev P1). The fit check required a 150 mm deep enclosure and a DIN-rail 12 V supply, and added

			glands, DIN rail and wiring parts; the estimate rose to \$635.70, over the \$600 budget, with options listed
0.6	2026-09-24	Amish Chadha	Added the optional controller board (TBK-DWG-004 Rev P1) and its cost, \$24.85 above the hand-wired baseline
0.5	2026-09-24	Amish Chadha	Controller schematic TBK-DWG-003 Rev P1 added; relay specified as DPDT; pull-down resistors added to the BOM (\$599.70); PE bonding stated
0.4	2026-09-24	Amish Chadha	Analysis script for TBK-TST-001 written and self-tested
0.3	2026-09-24	Amish Chadha	Controller firmware and logging host written; pin assignments recorded in firmware/README.md
0.2	2026-09-24	Amish Chadha	Replaced the test outline with a summary of test plan TBK-TST-001 and renumbered the tests TP0 to TP6 so they no longer share tags with the thermocouples
0.1	2026-09-24	Amish Chadha	Initial draft. Reduced-scale test article of about 6 kWh(th) within \$600, with objectives, design, BOM summary, test plan and safety; general arrangement TBK-DWG-002 Rev P1

ThermaBrick test article design precis

The test article is a one-third-scale ThermaBrick. It is a 16 US gal steel drum holding 68 kg of sand, storing 5.9 kWh(th) between 150 °C and 450 °C. The parts are estimated at \$727.70, \$127.70 over the original \$600 target. Amish accepted \$635.70 on 2026-09-24; the rise to \$727.70 is proposed, awaiting Amish (section 5). It keeps the part of the design that carries the most risk at full fidelity: four heater cells built from the same 5/8 in cartridge heaters, 3/4 in wells and cell spacing as the full-scale unit. It cuts cost everywhere else:

- one U-tube instead of the full-scale density;
- a 120 V plug-in supply instead of a 240 V branch circuit;
- stone wool in place of AES fiber;
- a small blower and dilution stack in place of the fan and mixing tee;
- a generic controller as the independent limit.

Its purpose is to measure the numbers the full-scale design rests on before \$3,674 is spent on it. Those are sand conductivity, wall contact conductance, insulation loss and the exchanger's heat transfer.

Parameter	Value
Vessel	16 US gal open-head steel drum, unlined, 20 ga (Uline S-19411)
Storage	68 kg washed play sand, 491 mm deep; 5.9 kWh(th) between 150 °C and 450 °C
Charge	4 cartridge heaters, 250 W at 120 V, in 3/4 in crimped wells; 1.0 kW, 8.3 A
Charge time from empty	15.7 h at up to 1.0 kW, including standby loss
Discharge	One 1-1/4 in U-tube, 12 V blower up to 4 L/s; 250 W held for 8.8 h
Standby loss	249 W at full charge
Envelope and mass	880 mm diameter, 1,688 mm high including the stack; about 116 kg
Controls	ESP32 with five thermocouple channels; separate latching 600 °C limit
Parts cost	\$727.70 estimated (<code>bom/bom-test-article.csv</code>); accepted budget \$635.70, rise proposed

Table 1. Key parameters of the test article.

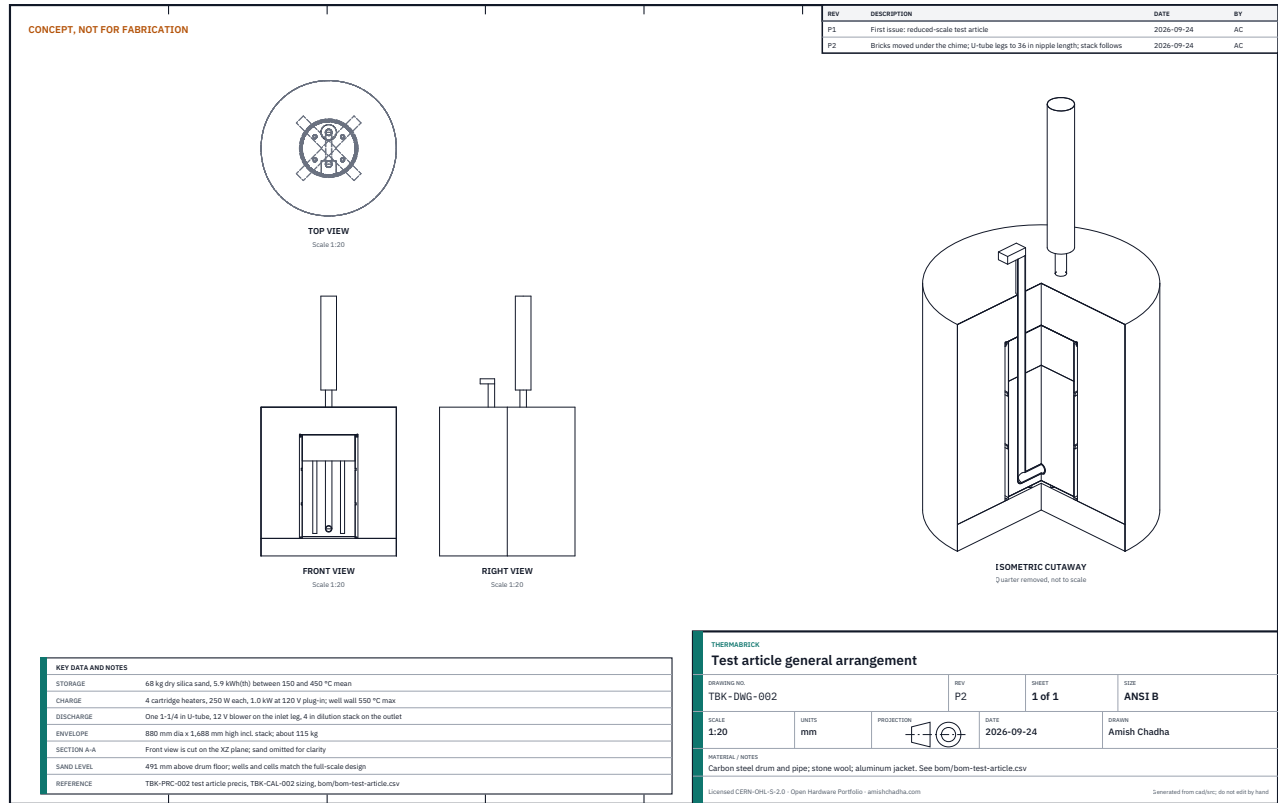


Figure 1. Test article general arrangement, TBK-DWG-002 Rev P1, generated from `cad/src/test_article.py`.

1. Objectives

The article answers five questions. Each one feeds a specific number in TBK-CAL-001.

No.	Question	What it settles at full scale
01	What are the effective conductivity of the sand and the contact conductance at the well wall, from 150 °C to 550 °C?	Charge time and the R3 shortfall (TBK-CAL-001, section 3 and Table 8)
02	How much heat does the envelope lose, and is stone wool acceptable as the hot face?	Standby loss (R7) and a possible saving of about \$330 on AES fiber
03	Does the U-tube air-side and sand-side model predict exchanger duty within 15 %?	Rated output (R4) and boost (R5)
04	Do the well-wall charge limit and the latching high limit work as intended?	Safety design (R8, R10, R12)
05	Does a thin drum grow or deform over repeated cycles?	Ratcheting risk (R19)

Table 2. Test objectives.

■ 2. What is kept and what is cut

Element	Full scale	Test article	Effect on the test
Heater cell	5/8 in heater in a 3/4 in well, cell radius 79.7 mm	Same heater and well, cell radius 84.4 mm	Full fidelity for O1
Heater	20 in, 240 V, US industrial brand	18 in, 120 V, made-to-order import	Check each resistance on arrival
Well bottom	Threaded cap	Pipe end crimped closed in a vise	No threader needed
Exchanger	Six U-tubes, leg cell radius 81 mm	One U-tube, leg cell radius 120 mm	Tests the model, not the full-scale output (O3)
Air handling	Fan, servo damper, collector, mixing tee	12 V blower on the inlet leg; dilution stack over the outlet	Flow measured directly at the inlet
Insulation	AES hot face and stone wool	Stone wool throughout	Tests a cost-down option (O2)
Supply	240 V, 20 A, GFCI breaker	120 V plug into a GFCI receptacle	Saves \$190
Limits	1/16 DIN limit and contactor	REX-C100 and latching power relay	Same function (O4)
PV following	Energy meter	Not fitted; charges on a timer or from the inverter API	Deferred to firmware

Table 3. Differences from the full-scale design.

■ 3. Design

Vessel and sand. The 16 US gal drum stands on four K-23 firebricks set on edge under the chime, with stone wool packed between them. Three 50 lb bags of play sand, sieved and weighed, fill it to 491 mm. Remove the rubber lid gasket, which is rated only to 121 °C, and seal the lid with a strip of stone wool.

Heaters and wells. Cut a 10 ft stick of 3/4 in black pipe into four 692 mm wells, and crimp the bottom 25 mm of each closed in a vise. The wells stand 20 mm off the drum floor at (± 90 , ± 75) mm and end 25 mm above the lid. Each holds a 5/8 in by 18 in cartridge heater, 250 W at 120 V. The four heaters are wired in parallel through one fuse, one SSR and the contacts of the latching relay.

Exchanger. A U-tube made of two 1-1/4 in by 36 in black nipples, two elbows and a 6 in nipple, with its legs at $y = \pm 103$ mm. The blower is taped to the inlet leg. The outlet leg ends 40 mm inside the open bottom of a 24 in, 4 in stovepipe, which draws in room air and dilutes the exchanger air before it leaves the top. Peak outlet air is 319 °C at the lowest test demand.

Envelope. Two layers of stone wool in the headspace and two over the lid, three layers around the side and an aluminum flashing jacket. The jacket runs at 26 °C at full charge.

Controls. An ESP32 reads five MAX6675 channels:

- T1: well-wall control thermocouple, clamped to one well 300 mm above the drum floor;
- T3: sand at the center, 300 mm above the drum floor;
- T4: sand 20 mm from the drum wall, beside a well, 300 mm above the drum floor;

- T5: exchanger outlet air;
- T6: room air.

It drives the SSR with the same rule as full scale: full power until T1 reaches 550 °C, then PI control to hold it. A separate REX-C100 reads T2, a second thermocouple on another well. Its relay output is closed below 600 °C and sits in the coil circuit of the latching power relay. An over-temperature, a press of STOP or a power interruption drops the relay, and it stays open until START is pressed. The ESP32 also drives the blower by PWM and logs every channel at 10 s intervals over Wi-Fi.

The full circuit is TBK-DWG-003 Rev P1, the controller schematic. Its KiCad source is in `electronics/test-article/`, generated by `electronics/src/schematic.py`. The latching relay K1 is double pole: pole 1 carries the heater current and pole 2 is the holding contact. R1 and R2, both 10 kΩ, hold the SSR and blower off while the ESP32 boots. The drum, wells, jacket, stack, enclosure, heater junction box and SSR heat sink are all bonded to the protective earth of the supply cord.

Enclosure. The controller sits in a 250 × 200 × 150 mm polycarbonate wall enclosure (IP65, UL 94 V-0 or 5VA) with a steel mounting plate bonded to PE. The layout is drawing TBK-DWG-005, generated from `cad/src/enclosure.py`.

- **DIN rail:** the HDR-15-12 supply and the K1 relay socket.
- **Top right:** the SSR on its heat sink, fins vertical.
- **Bottom left:** the controller, as modules or the optional board.
- **Under the REX-C100:** the lever-connector junctions for L_F and N.
- **Lid:** the REX-C100 and the STOP and START buttons.
- **Bottom face:** four cable glands (M25 thermocouples, M16 blower, M20 supply and M20 heater cable).

The model's fit check confirms that every part clears its neighbors by 3 mm. The REX-C100 body, 98 mm deep, ends 36 mm in front of the plate. A 100 mm deep enclosure fails the same check.

■ 4. Build

The step-by-step procedure is `docs/07-build/test-article-build.md`. It takes about three working days, and needs no pipe threader and no electrician. Every dimension in it comes from the generated cut list, `docs/07-build/cut-list.md`.

The stages run in this order:

1. Incoming checks.
2. Drum preparation.
3. Wells and U-tube.
4. Thermocouples.
5. Base and drum, set at the final position.
6. Sand, filled through a plywood template.
7. Heaters.
8. Insulation and jacket.
9. Blower and stack.
10. Controller enclosure.

11. Checks with the unit unplugged.
12. First power-up with the heaters disconnected.

Writing the procedure turned up four items the BOM had not covered. All four were added on 2026-09-24, for \$92.00:

- a second pack of stone wool (\$60.00), since the cut list needs about 5.98 m² against 5.55 m² in one pack;
- a heater cable from the junction box to the enclosure (\$8.00);
- wiring consumables (\$12.00);
- type K extension wire with miniature connectors (\$12.00), so the enclosure need not sit within reach of the 1 m probe leads.

Safety: Respirable crystalline silica and mineral fiber. Fill and fit insulation outdoors or with local exhaust, wearing a P100 or N95 respirator, gloves and eye protection.

Safety: The 4 in stack and the exchanger outlet run above 100 °C during discharge. Keep 450 mm clear of combustibles around the stack, and do not touch it while the blower is running.

Safety: Plug only into a GFCI-protected receptacle rated 15 A or more, with nothing else on the circuit. Never bypass or bridge the latching relay or the REX-C100 limit.

■ 5. Budget

Group	Cost (USD)
Drum and sand	134.50
Heaters and wells	100.00
U-tube, blower, supply and stack	118.00
Insulation, bricks and jacket	180.00
Controls, enclosure and wiring	195.20
Total	727.70

Table 4. Test article cost by group. Line items are in `bom/bom-test-article.csv`.

The basis is the same as the full-scale BOM: US retail and marketplace list prices in September 2026, before tax and shipping.

The estimate is \$35.70 over the original \$600 target. The controller enclosure model (TBK-DWG-005, section 3) showed that the \$600 figure rested on three wrong entries:

- a \$10 enclosure, 100 mm deep, that cannot take the REX-C100 (98 mm behind the lid);
- a barrel-jack 12 V adapter that should not be hard-wired inside a mains enclosure;
- no allowance for glands, DIN rail, lever connectors or an earth stud.

The corrected enclosure and wiring add \$36.00. Three options were considered:

1. accept \$635.70, with every part specified;
2. defer the \$25 discharge kit until TP5 and build for \$610.70 first;
3. use an enclosure or supply already on hand.

Decided by Amish on 2026-09-24: option 1. The budget for the test article is \$635.70, and the whole article, discharge kit included, is built at once.

The build procedure (section 4) then found \$92.00 of parts the BOM had not covered: a second stone wool pack, the heater cable, wiring consumables and thermocouple extension wire. Amish had them added to the BOM the same day, so it now totals \$727.70. Raising the accepted budget from \$635.70 to \$727.70 is **proposed, awaiting Amish**.

The following tools are assumed to be on hand and are not in the budget: a multimeter, a bathroom scale, a vise, a pipe cutter, a drill with hole saws, snips and a stopwatch.

5.1 Optional controller board (deferred)

Status: optional and deferred. The test article is built with hand-wired modules. The board is not ordered or built unless Amish decides otherwise after the review.

The low-voltage controller can be built on a printed circuit board instead of hand-wired modules. The board is drawing TBK-DWG-004 Rev P1, with its KiCad source and gerbers in `electronics/controller-board/` and its parts in `bom/bom-controller-board.csv`. It measures 110 mm by 80 mm and has two layers with a ground plane.

The ESP32-DevKitC V4 and the five MAX6675 modules plug into sockets. Discrete parts replace the buck and MOSFET modules: a RECOM R-78E regulator, an IRLZ44N MOSFET with a 1N5819 flyback diode, and a 2N3904 SSR driver. The nets and GPIO pins are the same as TBK-DWG-003, so the firmware is unchanged. The mains wiring stays on the panel either way.

The board adds \$24.85:

- \$27.85 of board parts, including one order of five boards;
- less \$6.00 for the two modules it replaces;
- plus about \$3.00 for a genuine DevKitC V4 in place of a generic board, whose header spacing may not fit.

That would take the test article to \$752.55. It is therefore an option, not the baseline, and it is deferred. Its value is a repeatable, inspectable wiring job for the controller.

■ 6. Test plan

Test plan TBK-TST-001 sets out seven procedures over about seven weeks, summarized in Table 5. The procedure numbers (TP) are separate from the thermocouple tags (T1 to T6).

Procedure	Purpose	Key pass criterion
TP0 Inspection and instrument checks	Build, sand mass, thermocouple and airflow calibration	Channels within ± 2 K at 0 °C and 100 °C
TP1 Limit and fault response, cold	O4	Latching trip at 600 °C $\pm$ 10 K; firmware safe state within 10 s
TP2 Bake-out and commissioning	Dry the sand, burn off binder, settle at 150 °C	1 M Ω or more per heater at 500 V
TP3 Charge	O1	Fitted model within 10 K RMS; time to 80 % within 10 %
TP4 Cool-down	O2	Loss within 20 % of 249 W before fitting
TP5 Discharge	O3	Duty within 15 % of the model, with no refit
TP6 Cycling	O5	Drum growth under 0.25 % after 25 cycles

Table 5. Test procedures (TBK-TST-001).

The fitted sand conductivity, contact conductance and insulation conductivity then go back into `tbk_cal_001.py`. TBK-CAL-001 will be reissued with measured values before the full-scale build is committed.

■ 7. Open questions

- [] Confirm heater lead time and resistance tolerance from the chosen supplier; order one spare if the budget allows.
- [] Confirm the blower delivers 4 L/s through the U-tube (96 Pa) by the bag method in TP0.
- [x] Write firmware for charge control, logging and blower PWM (`firmware/` ; wiring and API in `firmware/README.md`).
- [x] Write the formal test plan, TBK-TST-001.
- [x] Write the analysis script `docs/05-tests/tbk_tst_001_fit.py` (TBK-TST-001, section 9).