

THERMABRICK · DESIGN PRECIS

ThermaBrick test article design precis

Open Hardware Portfolio · amishchadha.com

DOCUMENT CONTROL

Document ID	TBK-PRC-002	Version	0.1
Status	Draft	Date	2026-09-24
Author	Amish Chadha	License	CERN-OHL-S-2.0
Repository	github.com/BoujeeEnjinia1701/thermabrick		
Source	docs/06-test-article.md @ 982233a		

REVISION HISTORY

Version	Date	Author	Change
0.1	2026-09-24	Amish Chadha	Initial draft. Reduced-scale test article of about 6 kWh(th) within \$600, with objectives, design, BOM summary, test plan and safety; general arrangement TBK-DWG-002 Rev P1

ThermaBrick test article design precis

The test article is a one-third-scale ThermaBrick. It is a 16 US gal steel drum holding 68 kg of sand, storing 5.9 kWh(th) between 150 °C and 450 °C. The parts are estimated at \$599.50, within the \$600 prototype budget. It keeps the part of the design that carries the most risk at full fidelity: four heater cells built from the same 5/8 in cartridge heaters, 3/4 in wells and cell spacing as the full-scale unit. It cuts cost everywhere else:

- one U-tube instead of the full-scale density;
- a 120 V plug-in supply instead of a 240 V branch circuit;
- stone wool in place of AES fiber;
- a small blower and dilution stack in place of the fan and mixing tee;
- a generic controller as the independent limit.

Its purpose is to measure the numbers the full-scale design rests on before \$3,674 is spent on it. Those are sand conductivity, wall contact conductance, insulation loss and the exchanger's heat transfer.

Parameter	Value
Vessel	16 US gal open-head steel drum, unlined, 20 ga (Uline S-19411)
Storage	68 kg washed play sand, 491 mm deep; 5.9 kWh(th) between 150 °C and 450 °C
Charge	4 cartridge heaters, 250 W at 120 V, in 3/4 in crimped wells; 1.0 kW, 8.3 A
Charge time from empty	15.7 h at up to 1.0 kW, including standby loss
Discharge	One 1-1/4 in U-tube, 12 V blower up to 4 L/s; 250 W held for 8.8 h
Standby loss	249 W at full charge
Envelope and mass	880 mm diameter, 1,616 mm high including the stack; about 115 kg
Controls	ESP32 with five thermocouple channels; separate latching 600 °C limit
Parts cost	\$599.50 estimated (<code>bom/bom-test-article.csv</code>)

Table 1. Key parameters of the test article.

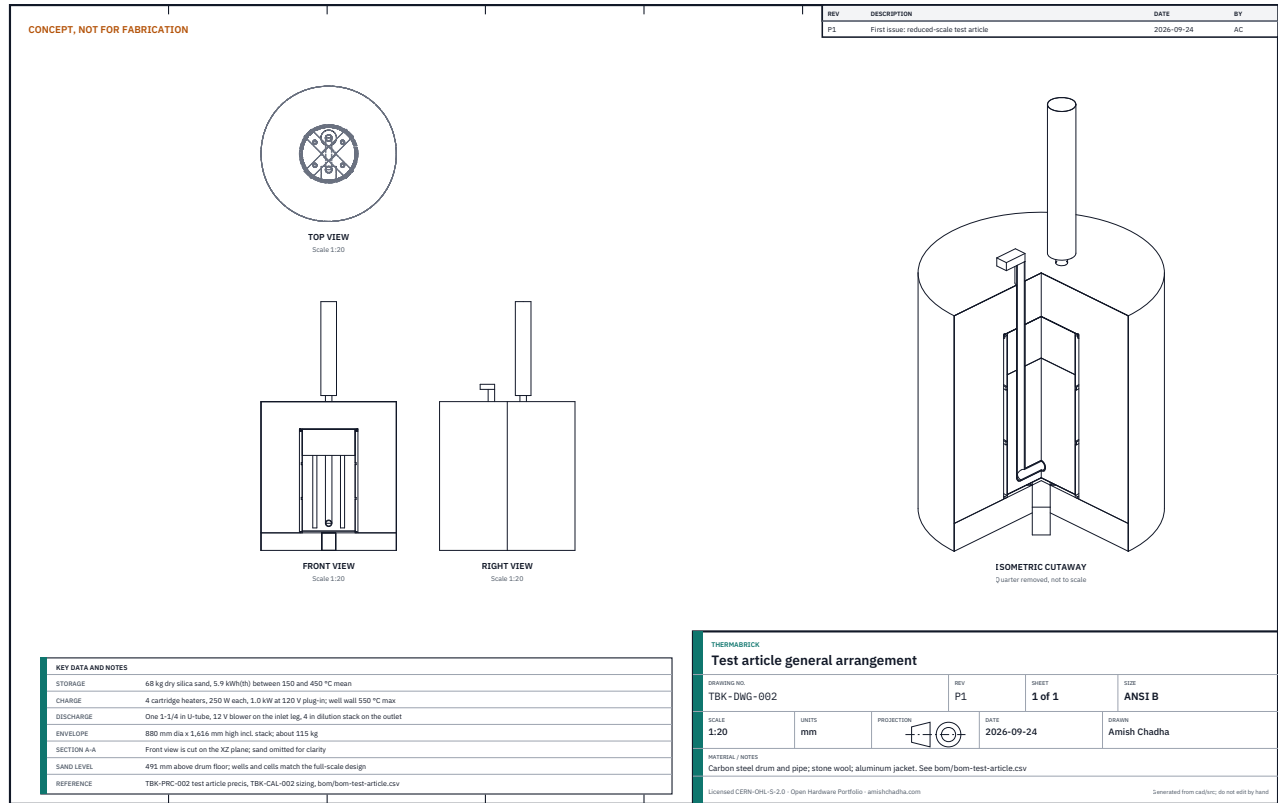


Figure 1. Test article general arrangement, TBK-DWG-002 Rev P1, generated from `cad/src/test_article.py`.

1. Objectives

The article answers five questions. Each one feeds a specific number in TBK-CAL-001.

No.	Question	What it settles at full scale
O1	What are the effective conductivity of the sand and the contact conductance at the well wall, from 150 °C to 550 °C?	Charge time and the R3 shortfall (TBK-CAL-001, section 3 and Table 8)
O2	How much heat does the envelope lose, and is stone wool acceptable as the hot face?	Standby loss (R7) and a possible saving of about \$330 on AES fiber
O3	Does the U-tube air-side and sand-side model predict exchanger duty within 15 %?	Rated output (R4) and boost (R5)
O4	Do the well-wall charge limit and the latching high limit work as intended?	Safety design (R8, R10, R12)
O5	Does a thin drum grow or deform over repeated cycles?	Ratcheting risk (R19)

Table 2. Test objectives.

■ 2. What is kept and what is cut

Element	Full scale	Test article	Effect on the test
Heater cell	5/8 in heater in a 3/4 in well, cell radius 79.7 mm	Same heater and well, cell radius 84.4 mm	Full fidelity for O1
Heater	20 in, 240 V, US industrial brand	18 in, 120 V, made-to-order import	Check each resistance on arrival
Well bottom	Threaded cap	Pipe end crimped closed in a vise	No threader needed
Exchanger	Six U-tubes, leg cell radius 81 mm	One U-tube, leg cell radius 120 mm	Tests the model, not the full-scale output (O3)
Air handling	Fan, servo damper, collector, mixing tee	12 V blower on the inlet leg; dilution stack over the outlet	Flow measured directly at the inlet
Insulation	AES hot face and stone wool	Stone wool throughout	Tests a cost-down option (O2)
Supply	240 V, 20 A, GFCI breaker	120 V plug into a GFCI receptacle	Saves \$190
Limits	1/16 DIN limit and contactor	REX-C100 and latching power relay	Same function (O4)
PV following	Energy meter	Not fitted; charges on a timer or from the inverter API	Deferred to firmware

Table 3. Differences from the full-scale design.

■ 3. Design

Vessel and sand. The 16 US gal drum stands on four K-23 firebricks set on edge under the chime, with stone wool packed between them. Three 50 lb bags of play sand, sieved and weighed, fill it to 491 mm. Remove the rubber lid gasket, which is rated only to 121 °C, and seal the lid with a strip of stone wool.

Heaters and wells. Cut a 10 ft stick of 3/4 in black pipe into four 717 mm wells, and crimp one end of each closed in a vise. The wells stand 20 mm off the drum floor at (± 90 , ± 75) mm and end 25 mm above the lid. Each holds a 5/8 in by 18 in cartridge heater, 250 W at 120 V. The four heaters are wired in parallel through one fuse, one SSR and the contacts of the latching relay.

Exchanger. A U-tube made of two 1-1/4 in by 36 in black nipples, two elbows and a 6 in nipple, with its legs at $y = \pm 103$ mm. The blower is taped to the inlet leg. The outlet leg ends 40 mm inside the open bottom of a 24 in, 4 in stovepipe, which draws in room air and dilutes the exchanger air before it leaves the top. Peak outlet air is 319 °C at the lowest test demand.

Envelope. Two layers of stone wool in the headspace and two over the lid, three layers around the side and an aluminum flashing jacket. The jacket runs at 26 °C at full charge.

Controls. An ESP32 reads five MAX6675 channels:

- T1: well-wall control thermocouple, clamped at mid-depth to one well;
- T3: sand at the center, at mid-depth;
- T4: sand 20 mm from the drum wall, beside a well, at mid-depth;

- T5: exchanger outlet air;
- T6: room air.

It drives the SSR with the same rule as full scale: full power until T1 reaches 550 °C, then PI control to hold it. A separate REX-C100 reads T2, a second thermocouple on another well. Its relay output is closed below 600 °C and sits in the coil circuit of the latching power relay. An over-temperature, a press of STOP or a power interruption drops the relay, and it stays open until START is pressed. The ESP32 also drives the blower by PWM and logs every channel at 10 s intervals over Wi-Fi.

■ 4. Build

The sequence follows TBK-PRC-001, section 6, and takes one weekend. It needs no pipe threader and no electrician.

1. Strip the drum's exterior paint and burn it out empty outdoors. Drill the lid for four 28.7 mm and two 44.2 mm holes from a template printed from the model.
2. Set four firebricks on edge and pack stone wool between them. Set the drum on top.
3. Stand the wells and the assembled U-tube, using the lid as a template. Clamp T1, T2 and T4 in place with steel tie wire and hang T3 on a wire guide.
4. Fill with sand in 100 mm lifts to 491 mm, rodding each lift.
5. Fit the headspace wool, the lid, the side and top wool, and the jacket. Fit the stack and the blower.
6. Drop in the heaters, land the leads in the junction box, and wire the enclosure.

Safety: Respirable crystalline silica and mineral fiber. Fill and fit insulation outdoors or with local exhaust, wearing a P100 or N95 respirator, gloves and eye protection.

Safety: The 4 in stack and the exchanger outlet run above 100 °C during discharge. Keep 450 mm clear of combustibles around the stack, and do not touch it while the blower is running.

Safety: Plug only into a GFCI-protected receptacle rated 15 A or more, with nothing else on the circuit. Never bypass or bridge the latching relay or the REX-C100 limit.

■ 5. Budget

Group	Cost (USD)
Drum and sand	134.50
Heaters and wells	100.00
U-tube, blower, supply and stack	116.00
Insulation, bricks and jacket	120.00
Controls, limit and wiring	129.00
Total	599.50

Table 4. Test article cost by group. Line items are in `bom/bom-test-article.csv`.

The basis is the same as the full-scale BOM: US retail and marketplace list prices in September 2026, before tax and shipping. The margin is only \$0.50. If quotes come in higher, defer the discharge kit first: the blower, PWM module and stack, together \$25. Build and run tests T1 to T3 and T5, which answer O1, O2 and O4, then add the discharge kit. The following tools are assumed to be on hand and are not in the budget: a multimeter, a bathroom scale, a vise, a pipe cutter, a drill with hole saws, snips and a stopwatch.

■ 6. Test plan

The formal test plan will be TBK-TST-001. Its outline is as follows.

Test	Procedure	Measured	Pass criterion
T1 Bake-out and commissioning	Check heater insulation resistance, then hold 150 °C sand mean for 24 h with the room ventilated	Insulation resistance, smoke and odor, moisture	1 MΩ or more per heater at 500 V after bake-out
T2 Charge	From a uniform 150 °C to 450 °C mean at up to 1.0 kW, with the well-wall limit active	T1, T3, T4 and SSR duty against time	Fits O1. Model within 10 % on time to 80 % charge after fitting sand k and contact h
T3 Cool-down	24 h idle from full, with the blower removed and both legs taped	Sand temperatures, jacket temperature	Fits O2. Loss within 20 % of the 249 W prediction before fitting
T4 Discharge	250 W and 150 W demands from full; airflow set by blower PWM and measured by the bag method	T5, T6, airflow, sand temperatures	Fits O3. Duty within 15 % of the model
T5 Limit trip	Hold the T2 thermocouple in a heat-gun jet with the heaters cold	Trip temperature, latch, reset	Trips at 600 °C ± 10 K; stays off until START
T6 Cycling	25 charge and cool-down cycles	Drum circumference at three heights every 5 cycles	O5. Growth under 0.25 % after 25 cycles

Table 5. Test plan outline.

The fitted sand conductivity, contact conductance and insulation conductivity then go back into `tbk_cal_001.py`. TBK-CAL-001 will be reissued with measured values before the full-scale build is committed.

■ 7. Open questions

- [] Confirm heater lead time and resistance tolerance from the chosen supplier; order one spare if the budget allows.
- [] Confirm the blower delivers 4 L/s through the U-tube (96 Pa) by the bag method before T4.
- [] Write firmware for charge control, logging and blower PWM (`firmware/`).
- [] Write the formal test plan, TBK-TST-001.