


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-09-30	AC



TOP VIEW

Scale 1:5; looking down (along -Z)

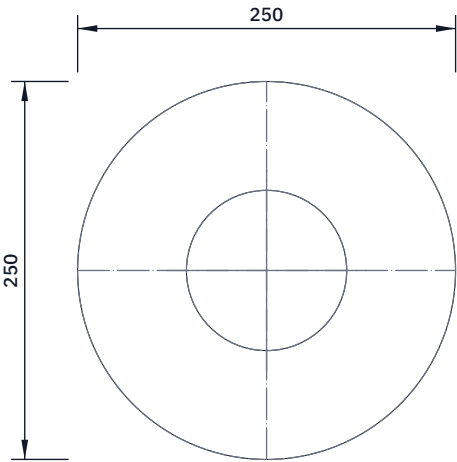


FRONT VIEW

Scale 1:5; looking at the front (along +Y)



RIGHT VIEW

Scale 1:5; looking at the right side (along -X)

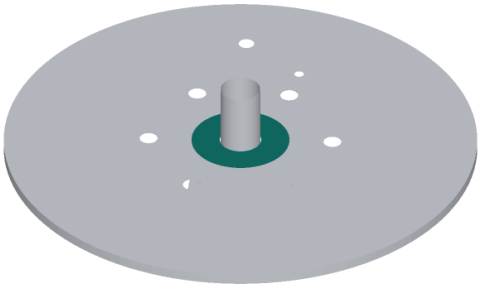

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

- Cut a 250 mm disc from 18 ga uncoated steel with snips; file the edge.
- Cut a 106 mm hole in the middle (2.3 mm clear of the 4 in pipe).
- Drill four 3.5 mm holes on a 230 mm circle for sheet metal screws.
- Fit: the 180 mm hole in the galvanized cap leaves a 39 mm gap round the hot outlet. Pack the gap with AES blanket (20 mm deep), then lay the ring over it and screw it to the cap at its outer edge.
- The ring, not the cap, faces the hot pipe, so no zinc sits within 39 mm of it (requirement R13: no zinc above 200 degrees C).
- Check: the ring does not touch the pipe at any point.

ThermaBrick outlet trim ring: making sketch

DRAWING NO. TBK-DWG-109			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 	DATE 2026-09-30		DRAWN Amish Chadha
MATERIAL / NOTES Uncoated (black) steel sheet 18 ga (1.2 mm)					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	