


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC




TOP VIEW

Scale 1:2; looking down (along -Z)

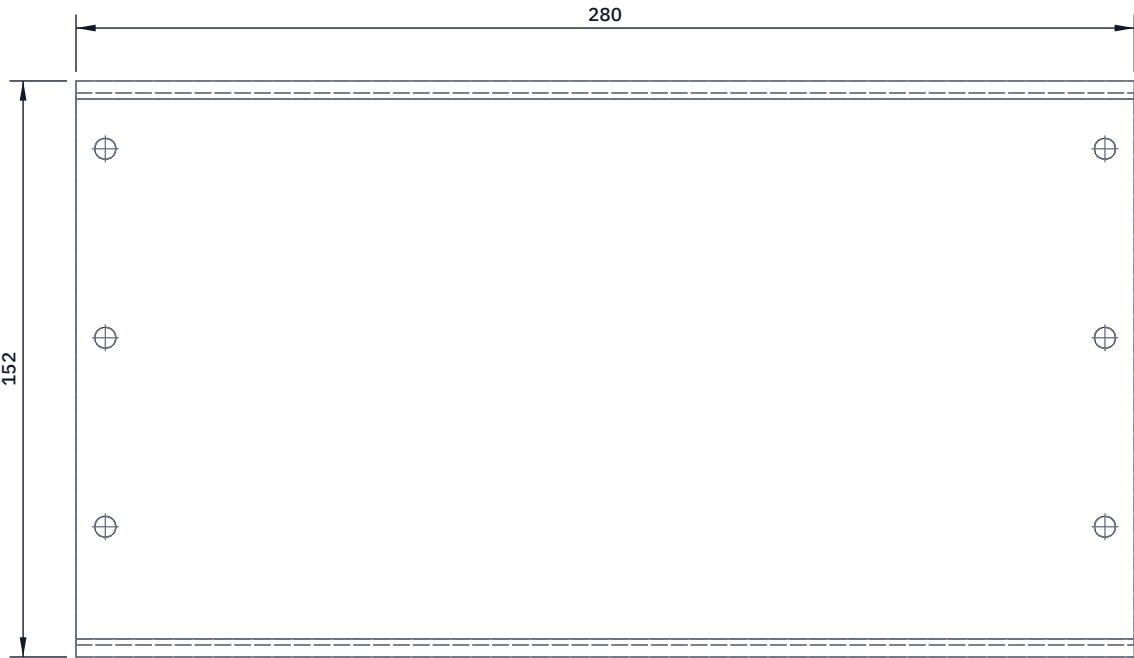


FRONT VIEW

Scale 1:2; looking at the front (along +Y)

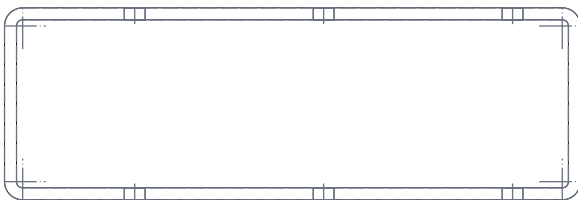

RIGHT VIEW

Scale 1:2; looking at the right side (along -X)

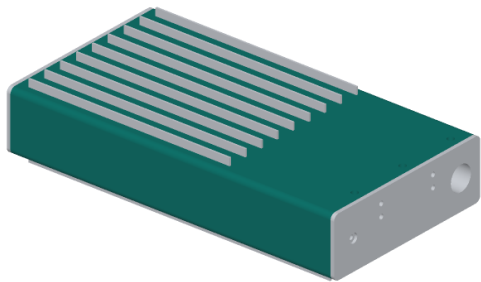

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut 280 mm long; square both ends to the side faces and file them flat. The cap flanges seat on these end faces.

File a 1 mm x 45 degree lead-in chamfer round the inside of each end, so the O-ring slides in without being cut.

Measure the bore at both ends (about 146.05 x 44.45 mm) and write it down: the cap plates are cut to it.

Radial screw holes: twelve 5.5 mm, 7.76 mm in from each end, through the top and the bottom wall, at 34.45, 84.45 and 134.45 mm from the front face (between the fins).

Drill them 4.2 mm first with the caps in place (see the caps).

Deburr every edge and hole inside and out; clean, etch-prime the outside (not the bore) before the fins are bonded.

Check: the bore is clean and round-cornered; ends square.

THERMACART

github.com/BoujeeEnjinia1701/thermacart

ThermaCart shell tube: making sketch

DRAWING NO. TCT-DWG-101			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:2	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES 6063-T52 rectangular tube 6 x 2 x 1/8 in (152.4 x 50.8 x 3.175 mm)					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand