



CONCEPT, NOT FOR FABRICATION

TwinKit · github.com/BoujeeEnjinia1701/twinkit

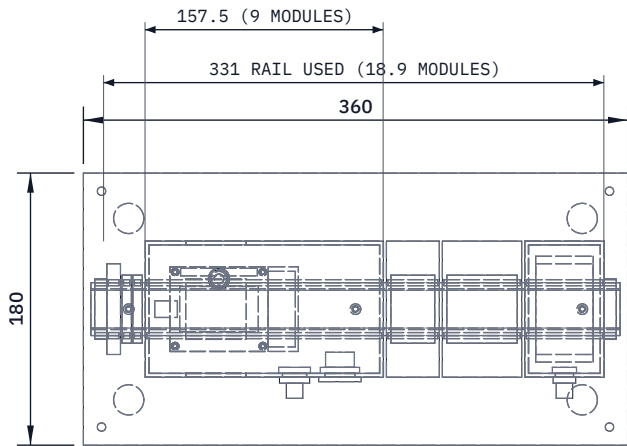

TOP VIEW

Scale 1:5; looking down (along -Z)

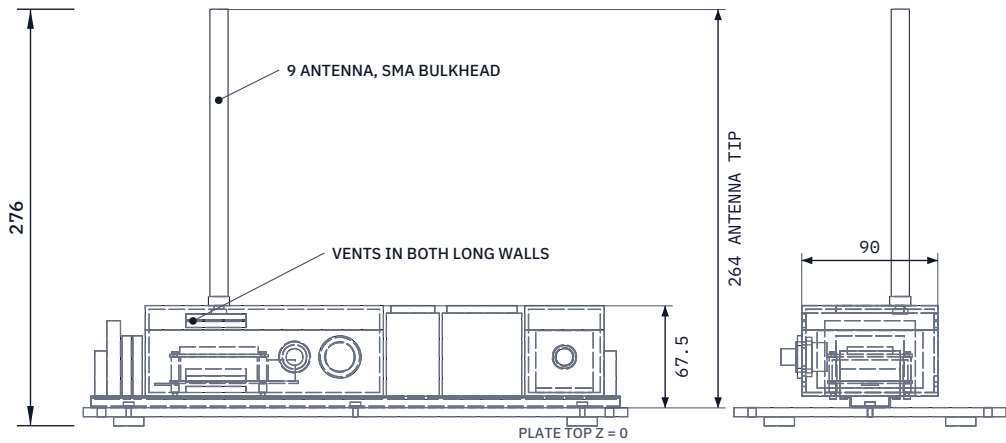


FRONT VIEW

Scale 1:5; looking at the front (along +Y)

RIGHT VIEW

Scale 1:5; looking at the right side (along -X)

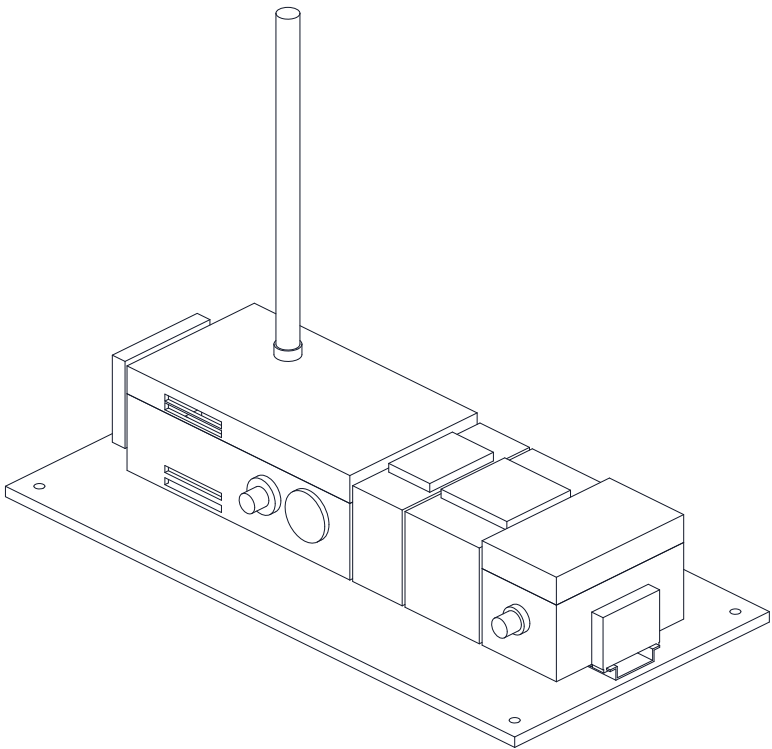

ISOMETRIC VIEW

Not to scale; seen from the front right and above, about 30 deg elevation

MAIN DIMENSIONS AND INTERFACES (MM)

TS35 x 7.5 rail, 350 long, on 3 M4 screws; module pitch 17.5
13 terminals, fuse | 3, 4 enclosure 9 mod | 10 DC-DC 2 mod | 11 UPS 3 mod
17 battery box 3 mod holding 12 pack (12.8 V, 1.5 Ah) | 18 end stops
Enclosure 157.5 x 90 x 60 above the rail; top 67.5 above the plate
Vents 640 mm² low and high, 42 apart (TWK-CAL-001 F)
5 board 85 x 56 on 6 standoffs; 7 HAT on 16 standoffs
20 RJ45 coupler and cable glands in the -Y walls; 9 to 30 V DC in
Plate 360 x 180 x 6 aluminium; omit in a cabinet
Third-angle; front view from -Y; X along the rail

TWINKIT

github.com/BoujeeEnjinia1701/twinkit

General arrangement, edge gateway

DRAWING NO. TWK-DWG-001		REV P3	SHEET 1 of 1	SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 	DATE 2026-10-02	DRAWN Amish Chadha
MATERIAL / NOTES Bought-in DIN modules per bom/bom.csv. PRELIMINARY, NOT FOR FABRICATION				
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com			Generated from cad/src; do not edit by hand	