


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-02	AC

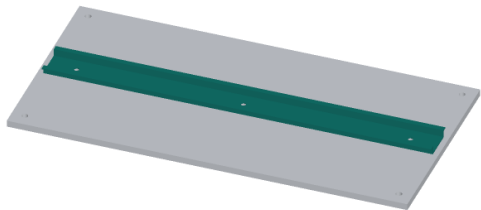

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut a 350 mm length of TS35 x 7.5 slotted top-hat rail with a hacksaw; file the cut ends square and remove every burr.


The rail is 35 mm wide across its top flanges, 7.5 mm high, with a 27 mm wide base that lies on the plate.

Holes: three, on the rail's centre line, at the middle and 150 mm each side. Where a slot already falls within 3 mm of a mark, use the slot; otherwise drill 4.5 mm through the base.

Fit: lay the rail on the plate's centre line, ends 5 mm in from the plate's short edges. Three M4 x 6 mm pan-head screws, snug.

Every module clips over the two top flanges; the screw heads sit 3.9 mm below the modules, so nothing rubs.

Check: the rail lies flat along its length; a module clips on and slides along it from end to end without catching on a screw.

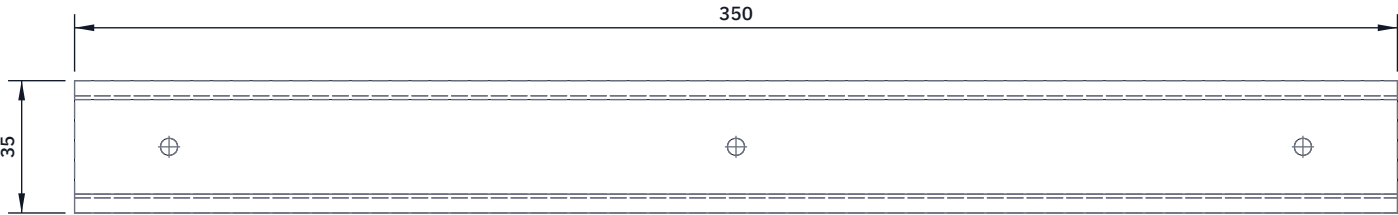

TOP VIEW

Scale 1:2; looking down (along -Z)



FRONT VIEW

Scale 1:2; looking at the front (along +Y)



RIGHT VIEW

Scale 1:2; looking at the right side (along -X)

TWINKIT

github.com/BoujeeEnjinia1701/twinkit

TwinKit DIN rail: making sketch

DRAWING NO. TWK-DWG-102			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:2	UNITS mm	PROJECTION 	DATE 2026-10-02		DRAWN Amish Chadha
MATERIAL / NOTES TS35 x 7.5 top-hat rail, slotted, steel or aluminium					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand