REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-24	AC

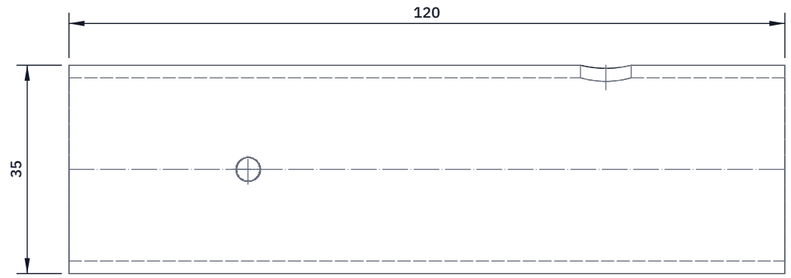

TOP VIEW

Scale 1:1; looking down (along -Z)

FRONT VIEW

Scale 1:1; looking at the front (along +Y)



RIGHT VIEW

Scale 1:1; looking at the right side (along -X)

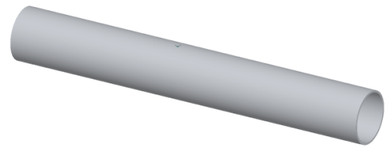

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Make four. Cut 120 mm from 34.93 x 2.11 mm tube; deburr.
Chamfer the outside of one end 1 mm x 45 deg: the free end.
Drill 8.5 mm for the snap button 30 mm from the free end.
Fit the V-spring button from inside, button out through
the hole. Spring legs lie flat across the bore (top to
bottom stays clear for the cable and guide tube).
Bond: the plain end goes 60 mm into the section's front end
with structural epoxy, button on the section's button line.
Drill 4.0 mm through tube and coupler, top and bottom, 30 mm
from the section end; press in the pins flush both sides.
Fit: 0.11 mm a side in the next tube; it must slide freely.
Check: pull hard by hand; nothing moves; button pops fully.

VOIDSCOPE github.com/BoujeeEnjinia1701/voidscope

VoidScope coupler (make 4): making sketch

DRAWING NO.	REV	SHEET	SIZE
VDS-DWG-102	P1	1 of 1	ANSI B

SCALE	UNITS	PROJECTION	DATE	DRAWN
1:1	mm		2026-10-24	Amish Chadha

MATERIAL / NOTES
6061-T6 drawn tube 34.93 x 2.11 mm (1.375 x 0.083 in)

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand