

REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-24	AC
P2	VDS-DDR-003: steerable camera tip	2026-10-24	AC

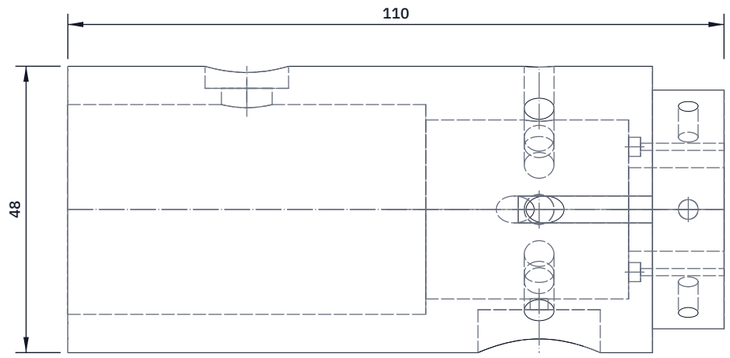


TOP VIEW

Scale 1:1; looking down (along -Z)

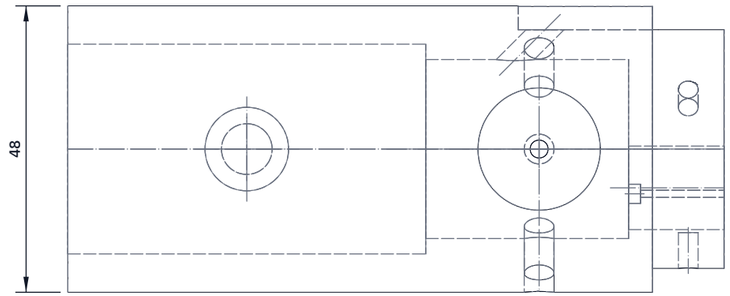


FRONT VIEW

Scale 1:1; looking at the front (along +Y)



RIGHT VIEW

Scale 1:1; looking at the right side (along -X)

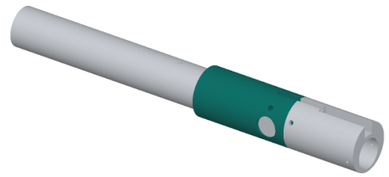

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Lathe: 48 mm outside x 98 mm, then a 40 mm spigot 12 long.
Back: bore 35.16 mm, 60 deep (a coupler must slide in).
Bore 30 mm from 60 to 94 mm: the air plenum; 4 mm front wall.
Spigot: 14 mm bore 6.5 mm below the axis, through, for the cable grommet. Tap three M4 holes 6 mm deep, 4 from its end.
Button hole 8.5 mm on the button line, 30 mm from the back; spotface 14 mm down to 20.3 mm from the axis.
Six 5 mm outlets 79 mm from the back face, at 0, 45, 135, 240, 270 and 300 deg from the button line toward the top.
Steering: two 3.2 mm stops 2 deep in the plenum side of the front wall, 10.5 mm each side, 7.5 below the axis; 1.2 mm wire holes on through the spigot.
Speaker pocket on the far side: 20.5 mm, flat floor 16.8 mm from the axis, 79 mm back; 3 mm wire hole into the plenum.
Water exit 4.5 mm at 45 deg on top, axis crossing 12 mm above the axis 72 mm from the back; groove 4.5 x 4 on top.
Check: coupler, nose, speaker fit; blow through outlets.

VOIDSCOPE

github.com/BoujeeEnjinia1701/voidscope

VoidScope collar: making sketch

DRAWING NO.	REV	SHEET	SIZE
VDS-DWG-104	P2	1 of 1	ANSI B

SCALE	UNITS	PROJECTION	DATE	DRAWN
1:1	mm		2026-10-24	Amish Chadha

MATERIAL / NOTES

6061-T6 round bar 50 mm, 115 mm long

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand