

REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-24	AC

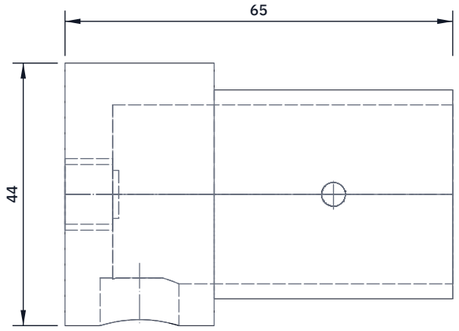


TOP VIEW

Scale 1:1; looking down (along -Z)

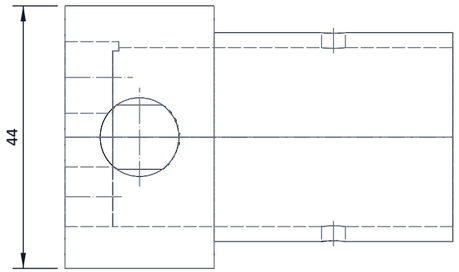


FRONT VIEW

Scale 1:1; looking at the front (along +Y)



RIGHT VIEW

Scale 1:1; looking at the right side (along -X)

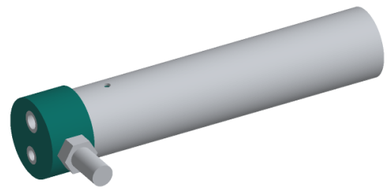

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Lathe: flange 44 mm outside x 25 mm; plug 35.0 mm x 40 mm
(0.08 mm a side in the rod: bonded, not a slide fit).
Bore 30 mm from the plug end to 8 mm from the back face.
End wall: 10 mm hole 10 mm below the axis (cable) and
12 mm hole 10 mm above it (guide tube); deburr; grommets.
Side of the flange, away from the button line: drill and
tap 1/4 BSP 12.5 mm from the back face into the bore.
Pins: drill 4.0 mm top and bottom through rod and plug
20 mm in front of the flange after bonding (step 2).
Check: plug enters the rod fully; barb seals with tape.

VOIDSCOPE github.com/BoujeeEnjinia1701/voidscope

VoidScope tail cap: making sketch

DRAWING NO.	REV	SHEET	SIZE
VDS-DWG-105	P1	1 of 1	ANSI B

SCALE	UNITS	PROJECTION	DATE	DRAWN
1:1	mm		2026-10-24	Amish Chadha

MATERIAL / NOTES
6061-T6 round bar 50 mm, 70 mm long

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand