REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-24	AC

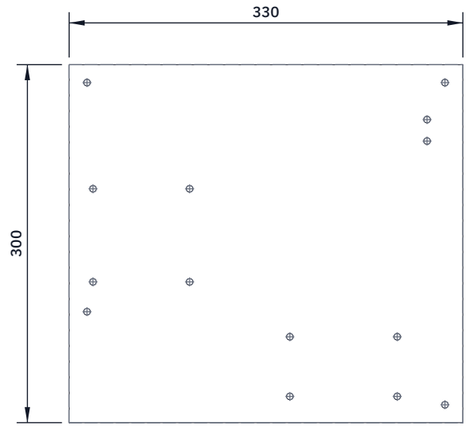

TOP VIEW

Scale 1:5; looking down (along -Z)

FRONT VIEW

Scale 1:5; looking at the front (along +Y)

RIGHT VIEW

Scale 1:5; looking at the right side (along -X)

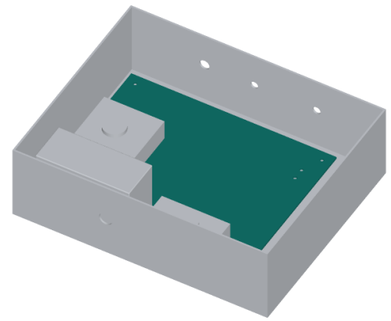

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut 330 x 300 mm from 3 mm sheet; round corners 5 mm.
Corner holes 5.5 mm, 15 mm in from each edge: the four spacers and M5 screws through the case floor.
Mark the parts from the corner nearest the case's -X, -Y corner: battery at 12, 12 (151 x 65); strap slots 4 x 25 mm each side of it; blower at 12, 110 on four standoffs; modules tray at 175, 12; flow meter angle at 280, 230.
Drill each fixing to suit the part as bought (M3 or M4).
Deburr; no sharp edge near the battery leads.
Check: lay every part on the plate before drilling.

VOIDSCOPE github.com/BoujeeEnjinia1701/voidscope

VoidScope equipment plate: making sketch

DRAWING NO.	REV	SHEET	SIZE
VDS-DWG-106	P1	1 of 1	ANSI B

SCALE	UNITS	PROJECTION	DATE	DRAWN
1:5	mm		2026-10-24	Amish Chadha

MATERIAL / NOTES
5052 aluminium sheet 3 mm

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand