BUILD PLAN SKETCH, PLAN NOT YET BUILT


VoidScope · github.com/BoujeeEnjinia1701/voidscope

REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-24	AC




TOP VIEW

Scale 2:1; looking down (along -Z)

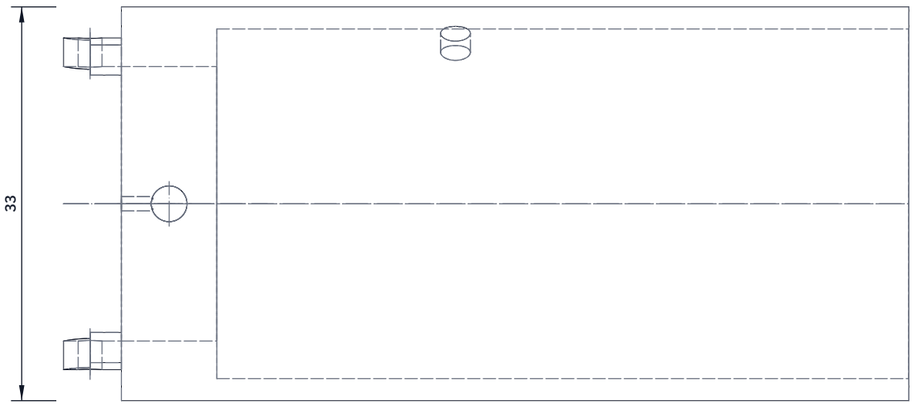


FRONT VIEW

Scale 2:1; looking at the front (along +Y)

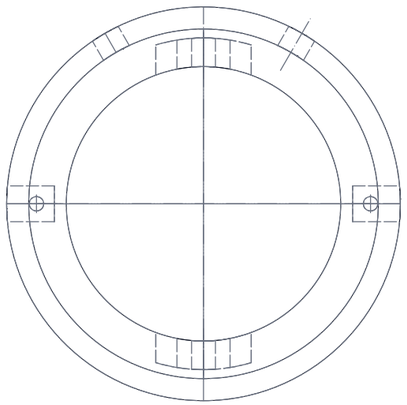

RIGHT VIEW

Scale 2:1; looking at the right side (along -X)

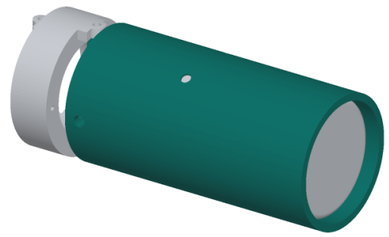

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Lathe: 33 mm outside, 66 mm long. From the front, bore 29.3 mm 58 mm deep for the camera; the camera's face sits 3 mm back from the front edge. Bore 23 mm through the 8 mm back wall for the cable.

Back: leave a 4.9 mm stub; mill it to two inner lugs 8 mm wide, top and bottom, 11.5 to 13.9 mm from the centre; round the ends; drill 2.0 mm pin holes.

Wire anchors: 1.2 mm holes 14 mm out on the two sides, 4 mm deep, into 3 mm cross holes from the outside where the crimped ferrules sit.

Two M3 tapped holes, 20 mm from the camera's back, at 60 and 120 deg, for nylon-tipped grub screws.

VOIDSCOPE

github.com/BoujeeEnjinia1701/voidscope

VoidScope tip housing: making sketch

DRAWING NO.	REV	SHEET	SIZE
VDS-DWG-112	P1	1 of 1	ANSI B

SCALE	UNITS	PROJECTION	DATE	DRAWN
2:1	mm		2026-10-24	Amish Chadha

MATERIAL / NOTES

6061-T6 round bar 35 mm, 75 mm long

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand