BUILD PLAN SKETCH, PLAN NOT YET BUILT

VoidScope · github.com/BoujeeEnjinia1701/voidscope

REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-24	AC



TOP VIEW

Scale 1:1; looking down (along -Z)

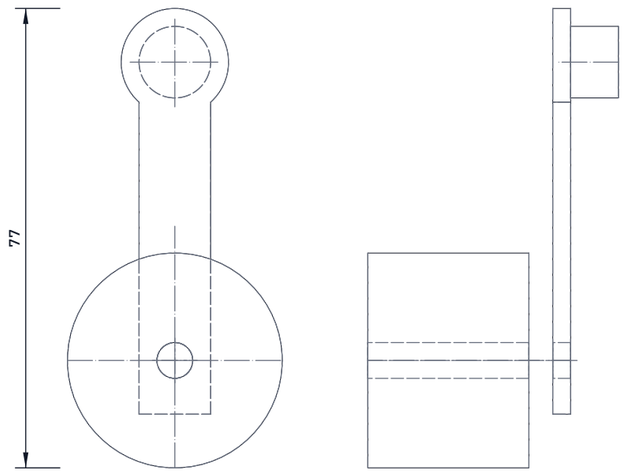

FRONT VIEW

Scale 1:1; looking at the front (along +Y)

RIGHT VIEW

Scale 1:1; looking at the right side (along -X)

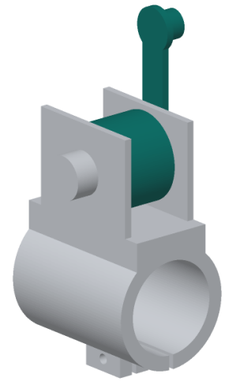

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Drum: turn 36 mm across, 27 mm long; 6 mm bore, a press fit on the shaft (or pin it). Two grooves 1 mm deep, 10.5 mm either side of the middle, one for each wire.
Drill and tap M3 across each groove for a wire clamp screw with a washer; the wires lie on opposite sides.
Lever: cut from 3 mm sheet, 12 mm wide, 59 mm from the shaft hole to the end, rounded; 6 mm hole; thumb peg 12 mm across riveted at the end.
Lever and drum are fixed to the shaft: the lever turns 71 deg for 90 deg at the tip, 35 deg for 45 deg.
Two stops on the cheek limit it to 71 deg each way.
Check: from straight, each way, the tip bends 90 deg.

VOIDSCOPE

github.com/BoujeeEnjinia1701/voidscope

VoidScope steering drum and lever: making sketch

DRAWING NO.	REV	SHEET	SIZE
VDS-DWG-114	P1	1 of 1	ANSI B

SCALE	UNITS	PROJECTION	DATE	DRAWN
1:1	mm		2026-10-24	Amish Chadha

MATERIAL / NOTES

6061-T6 bar 40 mm; 5052 sheet 3 mm

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand