


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-03	AC



TOP VIEW

Scale 1:1; looking down (along -Z)

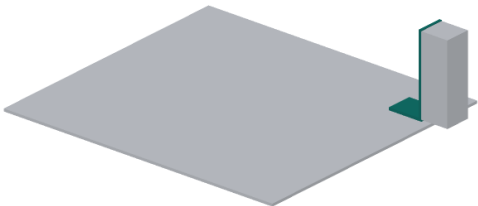

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS


Cut 30 mm off 40 x 40 x 3 mm angle; trim the upright leg to 95 mm long from a longer piece, or bolt a 30 x 95 mm strip to the angle with two M4 screws.

Base leg: two 4.5 mm holes for M4 to the plate.

Upright: holes to match the flow meter's panel screws.

The meter must stand upright for its float to read.

Check: meter vertical to within 2 deg with a level.

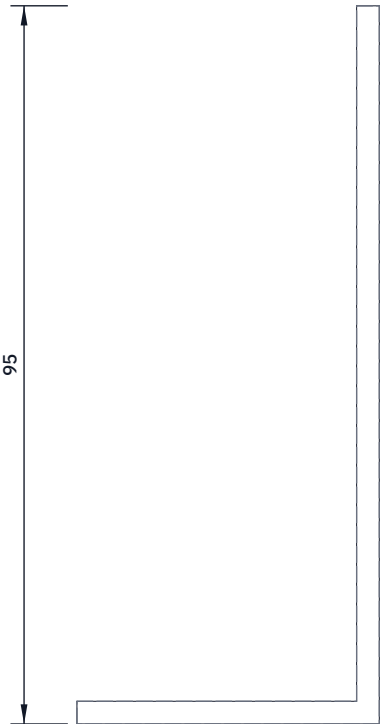

FRONT VIEW

Scale 1:1; looking at the front (along +Y)



RIGHT VIEW

Scale 1:1; looking at the right side (along -X)

VOIDSCOPE

github.com/BoujeeEnjinia1701/voidscope

VoidScope flow meter bracket: making sketch

DRAWING NO. VDS-DWG-109		REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:1	UNITS mm	PROJECTION 	DATE 2026-10-03	DRAWN Amish Chadha
MATERIAL / NOTES Aluminium angle 40 x 40 x 3 mm				
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com			Generated from cad/src; do not edit by hand	