


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-03	AC



TOP VIEW

Scale 1:5; looking down (along -Z)

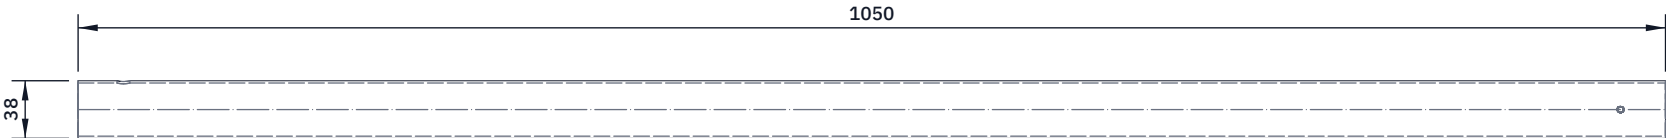

FRONT VIEW

Scale 1:5; looking at the front (along +Y)



RIGHT VIEW

Scale 1:5; looking at the right side (along +X)

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Make four. Cut 1,050 mm, square, from 38.1 x 1.47 mm tube.

Deburr inside and out; the inside edge must not cut the cable.

Scribe a straight line along the tube: the button line (+Y).

Back end, sections 1 to 3: drill 8.5 mm on the button line, 30 mm from the end. This takes the next section's button.

Back end, section 4: no button hole; the tail cap pins go in 4.0 mm holes top and bottom, 20 mm from the end (step 2).

Front end: the coupler pin holes, 4.0 mm top and bottom 30 mm from the end, are drilled through with the coupler fitted.

Depth marks every 100 mm from the tip, section number at each end, paint marker under clear heat-shrink.

Check: the next coupler slides in by hand with no rock.

VOIDSCOPE

github.com/BoujeeEnjinia1701/voidscope

VoidScope rod section (make 4): making sketch

DRAWING NO. VDS-DWG-101			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 	DATE 2026-10-03		DRAWN Amish Chadha
MATERIAL / NOTES 6061-T6 drawn tube 38.1 x 1.47 mm (1.5 x 0.058 in)					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand