



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-03	AC

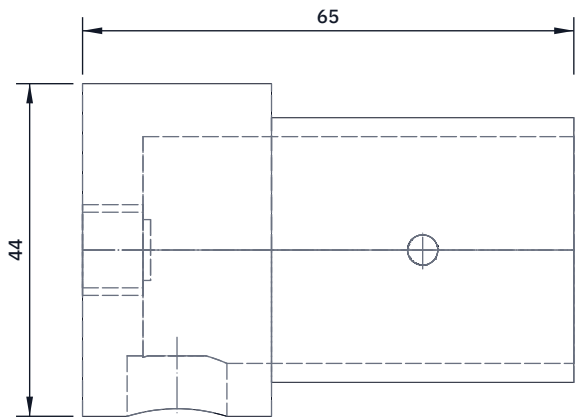


TOP VIEW

Scale 1:1; looking down (along -Z)

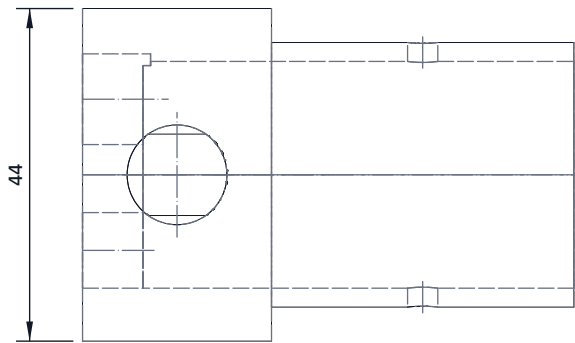


FRONT VIEW

Scale 1:1; looking at the front (along +Y)



RIGHT VIEW

Scale 1:1; looking at the right side (along -X)

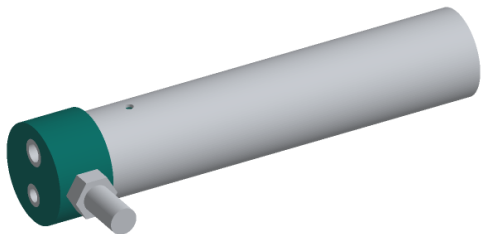

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Lathe: flange 44 mm outside x 25 mm; plug 35.0 mm x 40 mm
(0.08 mm a side in the rod: bonded, not a slide fit).

Bore 30 mm from the plug end to 8 mm from the back face.

End wall: 10 mm hole 10 mm below the axis (cable) and
12 mm hole 10 mm above it (guide tube); deburr; grommets.

Side of the flange, away from the button line: drill and
tap 1/4 BSP 12.5 mm from the back face into the bore.

Pins: drill 4.0 mm top and bottom through rod and plug
20 mm in front of the flange after bonding (step 2).

Check: plug enters the rod fully; barb seals with tape.

VOIDSCOPE

github.com/BoujeeEnjinia1701/voidscope

VoidScope tail cap: making sketch

DRAWING NO. VDS-DWG-105			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:1	UNITS mm	PROJECTION 	DATE 2026-10-03		DRAWN Amish Chadha
MATERIAL / NOTES 6061-T6 round bar 50 mm, 70 mm long					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	