


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-03	AC




TOP VIEW

Scale 1:5; looking down (along -Z)

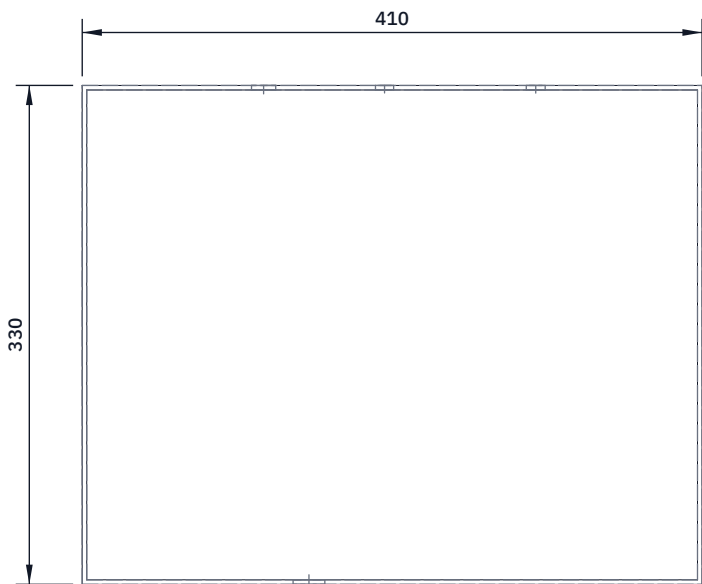


FRONT VIEW

Scale 1:5; looking at the front (along +Y)

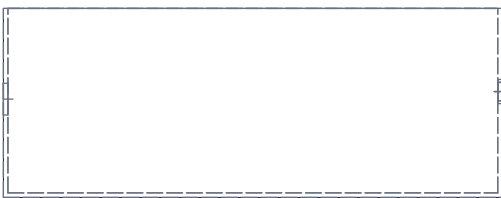

RIGHT VIEW

Scale 1:5; looking at the right side (along -X)

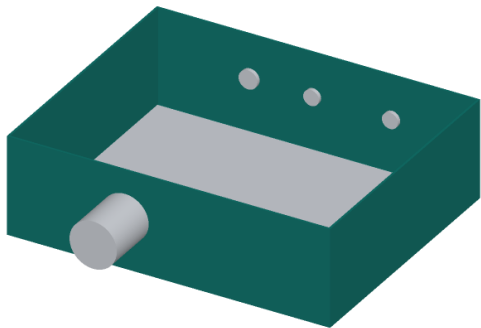

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Bought case 410 x 330 x 175 mm; drill the base only as here.
Wall toward the probe (the +Y long side), 70 mm up from the floor outside: 16 mm for the camera socket 120 mm from the left end; 12 mm for the headset socket at 200 mm; 12.5 mm for the air outlet bulkhead at 300 mm.
Opposite wall: 21 mm for the intake filter, 150 mm from the left end, 65 mm up.
Floor: four 5.5 mm holes matching the plate's corner holes.
Lid: four 5.5 mm holes for the monitor bracket feet.
Use a step drill, slow; deburr; every hole gets its seal.
Check: the case still closes and latches.

VOIDSCOPE

github.com/BoujeeEnjinia1701/voidscope

VoidScope surface unit case: drilling sketch

DRAWING NO. VDS-DWG-108			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 	DATE 2026-10-03		DRAWN Amish Chadha
MATERIAL / NOTES Bought IP67 case, polypropylene					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	