



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-02	AC




TOP VIEW
Scale 2:1; looking down (along -Z)

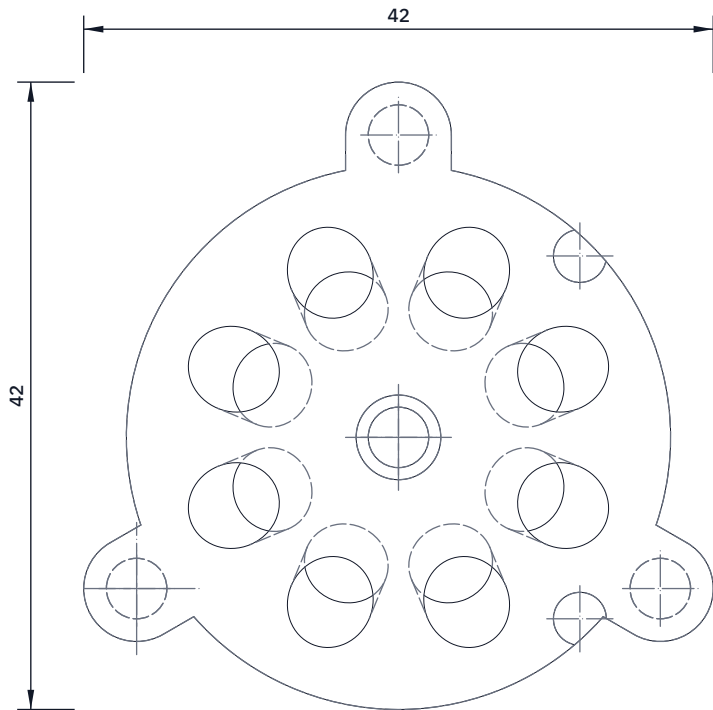

FRONT VIEW
Scale 2:1; looking at the front (along +Y)

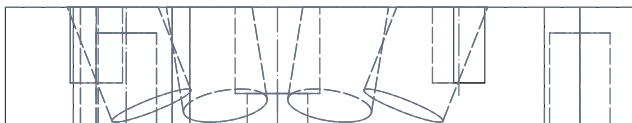

RIGHT VIEW
Scale 2:1; looking at the right side (along -X)

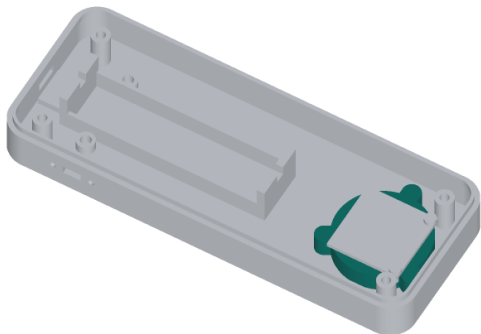

WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Print in black PETG, top face on the bed, 0.1 mm layers, 100 % infill.
Disc 36 mm across, 7.2 mm tall, with three lugs for the shroud screws on a 40 mm circle; press an M3 insert into each lug from below.
Eight LED pockets 5.6 mm on a 20 mm circle, each tilted 23 degrees inward so the beams meet on the item; leads come out of the top.
Centre bore 5.6 mm for the photodiode can, with a step 4 mm up the body; below the step a 4 mm aperture and a baffle tube 7 mm across that stands 0.5 mm proud of the underside and rests on the window.
Two 3.5 mm holes 12 mm each side for M2.5 inserts (amplifier board).
Ream the LED pockets and the bore with a 5.6 mm drill by hand.
Check: each LED can slides in and stops square; the bore is black inside.

WASTEWISE SCAN

github.com/BoujeeEnjinia1701/wastewise-scan

WasteWise Scan optical head block: making sketch

DRAWING NO. WSC-DWG-103		REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 2:1	UNITS mm	PROJECTION 	DATE 2026-10-02	DRAWN Amish Chadha
MATERIAL / NOTES Black PETG, 3D printed				
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com			Generated from cad/src; do not edit by hand	