



CONCEPT, NOT FOR FABRICATION

WellSense · github.com/BoujeeEnjinia1701/wellsense

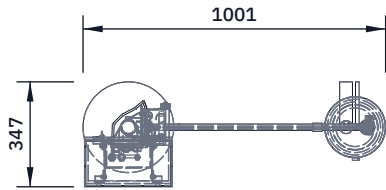

TOP VIEW

Scale 1:25; looking down (along -Z)

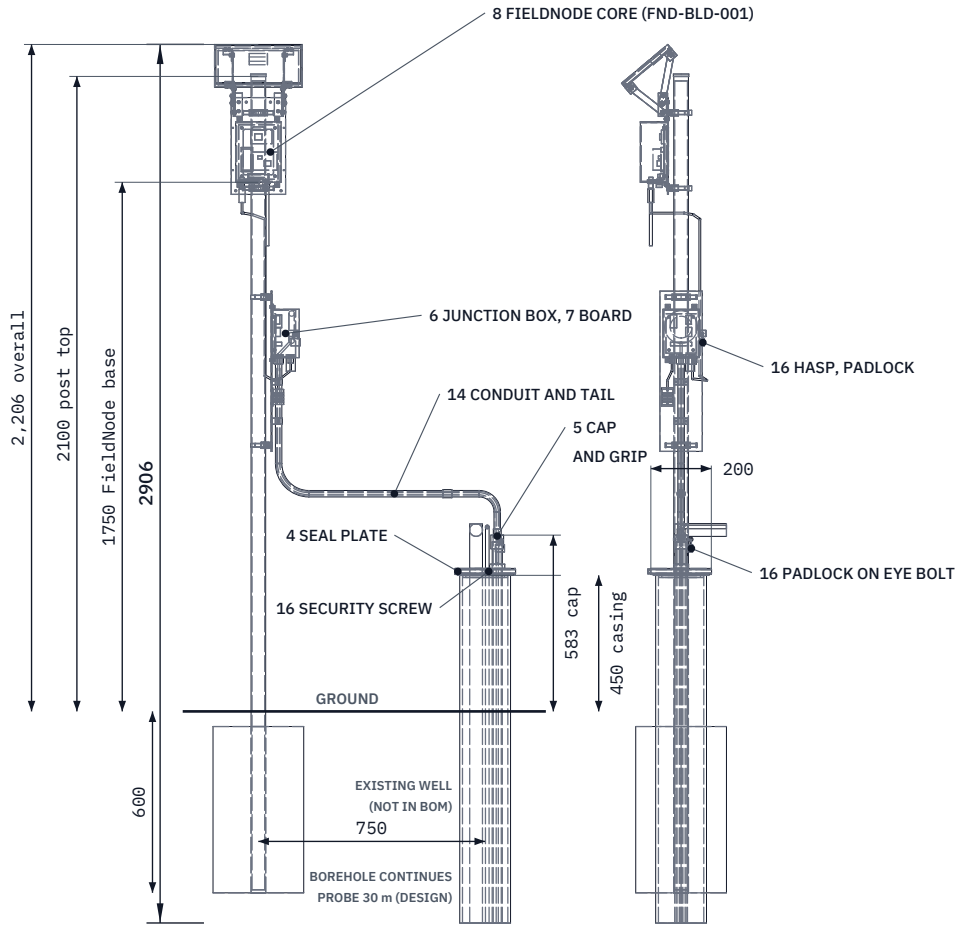


FRONT VIEW

Scale 1:25; looking at the front (along +Y)

RIGHT VIEW


Scale 1:25; looking at the right side (along -X)

REV	DESCRIPTION	DATE	BY
P1	Preliminary GA for TRL 3 (from cad/src/model.py)	2026-09-25	AC
P2	22 mm probe; conduit 14 added (WLS-DDR-002)	2026-09-25	AC
P3	FieldNode panel tilt corrected to face -Y (WLS-DDR-003)	2026-09-27	AC
P4	Layout and labels tidied	2026-09-27	AC
P5	Constructable design (WLS-DDR-004)	2026-10-02	AC
P6	Locks added, line 16 (WLS-DEC-001)	2026-10-02	AC

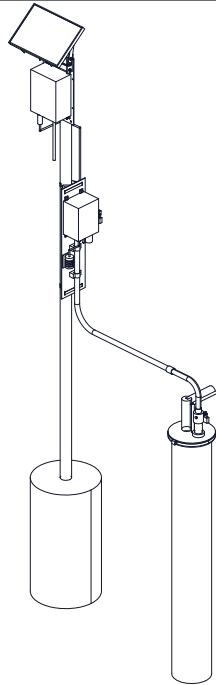

ISOMETRIC VIEW

Not to scale; seen from the front right and above, about 30 deg elevation

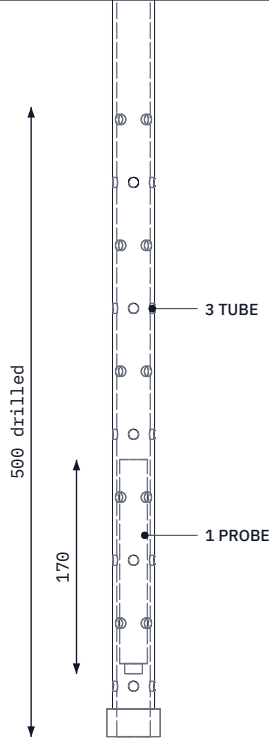

DETAIL A: PROBE ZONE

Scale 1:6; bottom of tube

MAIN DIMENSIONS AND INTERFACES (MM)

Casing 150 bore (existing), stick-up 450. Seal plate: split 200 x 20 HDPE, rim band

Access tube 1 in Sch 40 PVC 33.4 x 26.6; 32 clear of riser

Probe 22 max x 170, 2.3 radial clearance; 30 m below casing top (to 60 m)

Post 48.3 x 3.2 galv., 2100 above ground, 600 in 300 footing

Junction box 90 x 120 x 160, center 1250, on a plate with V-blocks

FieldNode core per FND-DWG-001; base 1750; sensor port A (I2C, 12 V rail)

Loop 4 to 20 mA from a 24 V boost; 150 ohm shunt (WLS-CAL-001)

Cable in 1/2 in galv. conduit (21.3 OD) and a flexible tail; locks per line 16

Third-angle; front view from -Y, FieldNode and panel face the equator; well on the Z axis

WELLSENSE

github.com/BoujeeEnjinia1701/wellsense

General arrangement

DRAWING NO.

WLS-DWG-001

REV

P6

SHEET

1 of 1

SIZE

ANSI B

SCALE

1:25

UNITS

mm

PROJECTION



DATE

2026-10-02

DRAWN

Amish Chadha

MATERIAL / NOTES

Bought-in parts per bom/bom.csv; borehole not drawn below -700. PRELIMINARY, NOT FOR FABRICATION

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand