



CONCEPT, NOT FOR FABRICATION

WellSense · github.com/BoujeeEnjinia1701/wellsense

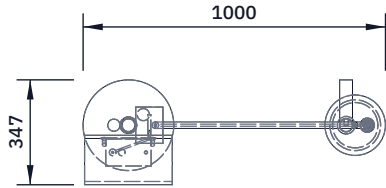

TOP VIEW

Scale 1:25; looking down (along -Z)

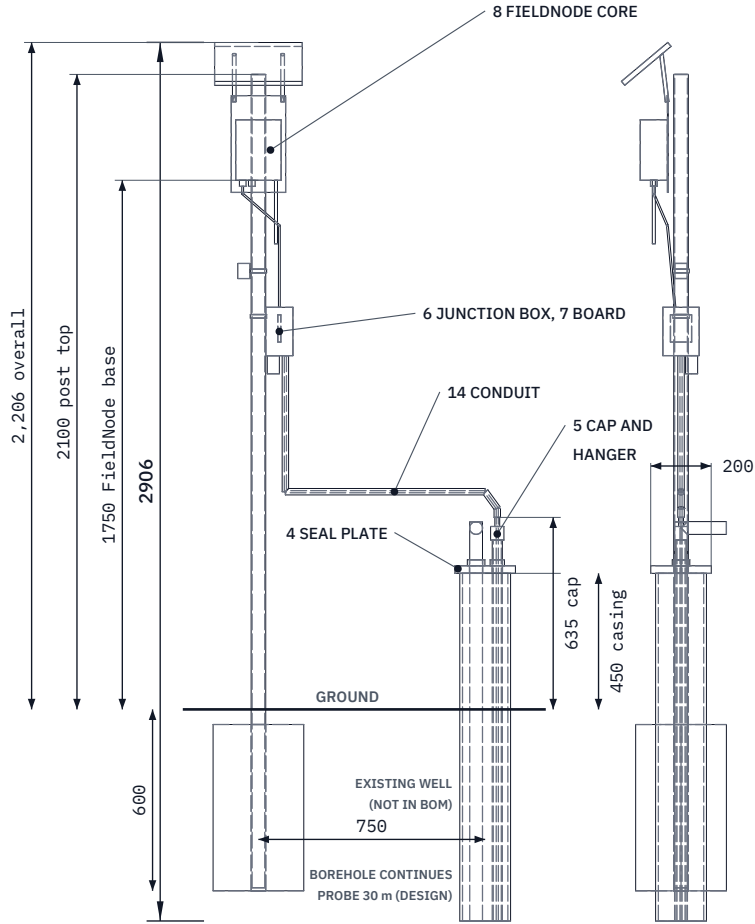


FRONT VIEW

Scale 1:25; looking at the front (along +Y)

RIGHT VIEW


Scale 1:25; looking at the right side (along -X)

REV	DESCRIPTION	DATE	BY
P1	Preliminary GA for TRL 3 (from cad/src/model.py)	2026-09-25	AC
P2	22 mm probe; conduit 14 added (WLS-DDR-002)	2026-09-25	AC
P3	FieldNode panel tilt corrected to face -Y (WLS-DDR-003)	2026-09-27	AC
P4	Layout and labels tidied	2026-09-27	AC

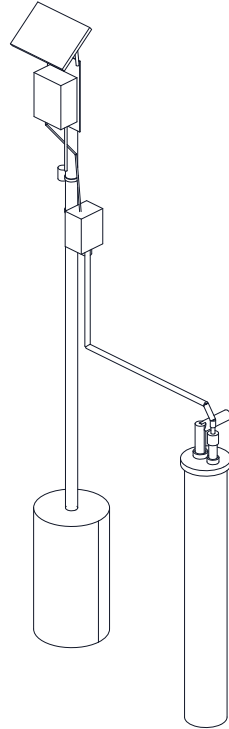

ISOMETRIC VIEW

Not to scale; seen from the front right and above, about 30 deg elevation

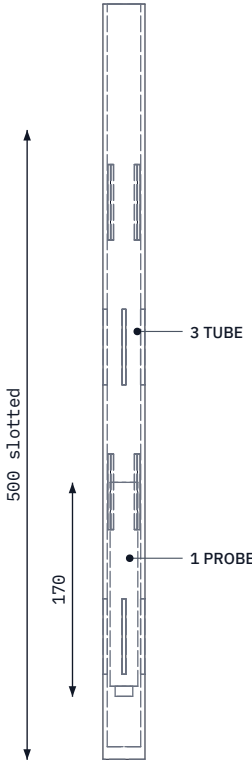

DETAIL A: PROBE ZONE

Scale 1:6; bottom of tube

MAIN DIMENSIONS AND INTERFACES (MM)

Casing 150 bore (existing); stick-up 450; seal plate 200 x 25

Access tube 1 in Sch 40 PVC 33.4 x 26.6; 32 clear of riser

Probe 22 max dia. x 170; 2.3 radial clearance in the tube

Probe 30 m below the casing top (design); to 60 m

Post 48.3 x 3.2 galv., 2100 above ground, 600 in 300 footing

Junction box 90 x 120 x 160, center 1250

FieldNode core per FND-DWG-001; base 1750; sensor port 1 (I2C, 12 V rail)

Loop 4 to 20 mA from a 24 V boost; 150 ohm shunt (WLS-CAL-001)

Cable in 1/2 in galv. conduit (21.3 OD), tube cap to junction box

Third-angle; front view from -Y, FieldNode and panel face the equator; well on the Z axis

WELLSENSE

github.com/BoujeeEnjinia1701/wellsense

General arrangement

DRAWING NO.

WLS-DWG-001

REV

P4

SHEET

1 of 1

SIZE

ANSI B

SCALE

1:25

UNITS

mm

PROJECTION



DATE

2026-09-27

DRAWN

Amish Chadha

MATERIAL / NOTES

Bought-in parts per bom/bom.csv; borehole not drawn below -700. PRELIMINARY, NOT FOR FABRICATION

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand