



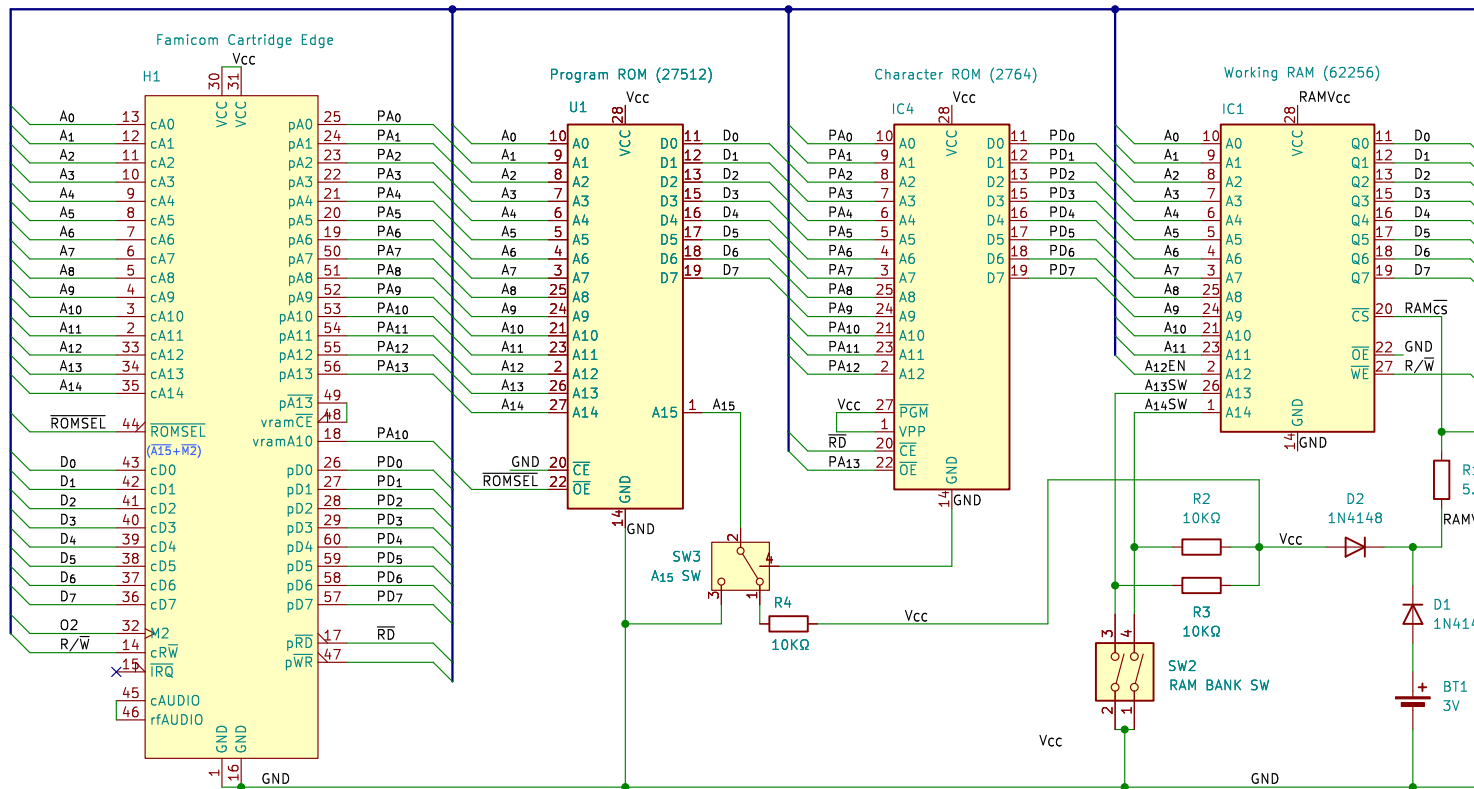

8KB working RAM (0x6000-0x7FFF) so 32KB 62256 gives us four possible banks. A13 and A14 are switchable - they are not connected to address bus.

If you're not interested in switching banks, using only 8KB, then omit SW2 - A13 & A14 are pulled high by default.


If you only want the original 4KB then cut the A12-to-A12EN solder bridge and connect A12EN to GND.



Dual v2.1/v3.0 ROM
Use a 27512 EPROM to allow switching between v2.1 and v3.0.
SW3 (A15 SW) will set A15 address pin to either low (first 32KB bank) or high (top 32KB bank).
If you only want one version then substitute with a 32KB 27256 and omit SW3.

27256: pin 1 = Vpp
27512: pin 1 = A15

Family BASIC V3 is hard-coded for a maximum of 4KB.
Some modification is required to hard coded values in the ROM to increase from 0x6FFF limit to full 0x7FFF.

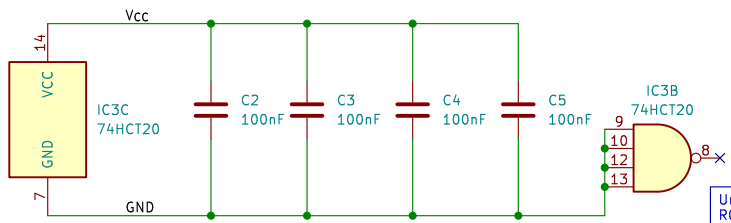

Brett Hallen

Sheet: /
File: Family_BASIC_Cartridge.kicad_sch

Title: Nintendo Famicom Family BASIC 8KB

Size: A4 Date: 11/JAN/2026

KiCad E.D.A. 9.0.5

Rev: A

Id: 1/1