

GEO1003 - Shared Notes

Master Geomatics Students

2024-12-07

Contents

Introduction	3
Example	3
Introduction	3
Markdown Basics	3
Resources and Helpers	3
Comments	4
Headers	4
Bold and Italic	4
Lists	5
Links	5
Images	5
Blockquotes	6
Code	6
Tables	6
Math	6
Definition Blocks	7
Definition Blocks + Lists	7
Empty Section	7
How does GNSS work?	7
Introduction	7
GPS segments	8
Radio Signal	8
Initialisation	8
Pseudorange Measurement	9
Carrier Phase Measurement	9
Jamming and Spoofing	9
GPS Jamming	9
GPS Spoofing	9
GNSS performance	9
Introduction	9
Error Sources	9
Pseudorange Calculation	9
Ionosphere Delay	10

Accuracy and Precision	10
Dilution of Precision	10
Availability, Continuity and Integrity	10
Availability	10
Continuity	10
Integrity	10
PPP-RTK	10
Abbreviations	10
PPP	11
RTK	11
PPP-RTK	11
Comparing RTK, PPP, and PPP-RTK	12
DGNSS	14
GNSS in the built environment (outdoor, indoor and in between)	14
Introduction	14
Multipath	14
Urban Canyon	14
Shadow Matching	14
CRS	14
Introduction	14
Coordinate Systems	14
Coordinate Reference Systems	14
Geographic Coordinate Reference Systems	14
Projected Coordinate Reference Systems	14
Linear Reference Systems	14
Terrestrial Reference Systems and Frames	14
Datum and Transformations	14
Transformations and conversions	14
Datums	14
Map Projections	14
RDNAP	14
Wi-Fi-monitoring / Fingerprinting	14
Introduction	14
Wi-Fi-Based Approaches	14
Wi-Fi Monitoring	14
Wi-Fi Fingerprinting	14
Radio Signal Based Techniques	14
Received Signal Strength (RSS)	14
Time of Arrival (ToA)	14
Time Difference of Arrival (TDoA)	14
Angle of Arrival (AOA)	14
Path-Loss	14
Fine Timing Measurement (FTM)	14
Radio Frequency Identification (RFID)	14
Hybrid and Other Techniques	14
Trilateration	14
Inertial Navigation Systems (INS)	14
Visual Based Indoor Localisation	14

Isovisits	14
Performance Metrics	14
Position	14
Location	14
Yield	14
Consistency	14
Overhead	14
Latency	14
Power Consumption	14
Roll-Out and Operating Costs	14
Location awareness and privacy	14
Introduction	14
Spaces	14
Indoor Space	14
Semi-Indoor Space	14
Semi-Outdoor Space	14
Outdoor Space	14
IndoorGML	14

Introduction

This is the introduction to the notes.

Example

Introduction

The goal of this chapter is just to demonstrate how things should be organized. It will be removed from the notes in the end.

Markdown Basics

Resources and Helpers

A nice cheat sheet about Markdown can be found at this link: <https://www.markdownguide.org/cheat-sheet/>.

On VS Code, there are some nice extensions that can help you write Markdown files:

- Markdown All in One to provide useful shortcuts and commands
- markdownlint to properly format your Markdown files

Feel free to ask me if you have questions about Markdown.

Comments

This `<!--This is a comment.-->` is
`<!--`
Comments are not rendered.
They can take multiple lines
`-->`

a
sentence.

This is a sentence.

Headers

`<!-- Comment the fist headers to avoid messing up the outline of this file -->`
`<!--`
`# Level 1`

`## Level 2`

`### Level 3`
`-->`

`#### Level 4`

`##### Level 5`

`##### Level 6`

Level 4

Level 5 Level 6

Bold and Italic

- Normal text
- ****Bold text****
- *_Italic text_*
- *****_Bold and italic text_*****

- Normal text
- **Bold text**
- *Italic text*
- ***Bold and italic text***

Lists

Unordered list:

- Unordered list item 1
- Unordered list item 2
 - Nested unordered list item

Ordered list:

1. Ordered list item 1
2. Ordered list item 2
 1. Nested ordered list item

Unordered list:

- Unordered list item 1
- Unordered list item 2
 - Nested unordered list item

Ordered list:

1. Ordered list item 1
2. Ordered list item 2
 1. Nested ordered list item

Links

[Example link] (<https://www.example.com>)

Example link

Images

![Example image](../../images/example.jpg){ width="250" }



Figure 1: Example image

Blockquotes

> This is a blockquote.

This is a blockquote.

Code

Inline code: ``print("Hello, World!")``

Code block:

```
```python
def hello_world():
 print("Hello, World!")
```
```

Inline code: `print("Hello, World!")`

Code block:

```
def hello_world():
    print("Hello, World!")
```

Tables

Table: A simple table

| Header 1 | Header 2 |
|----------|----------|
| Cell 1 | Cell 2 |
| Cell 3 | Cell 4 |

Table 1: A simple table

| Header 1 | Header 2 |
|----------|----------|
| Cell 1 | Cell 2 |
| Cell 3 | Cell 4 |

Math

Inline math: x^2 is the square of x .

Block math:

$$\int_0^{\infty} e^{-x^2} dx = \frac{\sqrt{\pi}}{2}$$

Inline math: x^2 is the square of x .

Block math:

$$\int_0^\infty e^{-x^2} dx = \frac{\sqrt{\pi}}{2}$$

Definition Blocks

****Lorem ipsum dolor sit amet****

: Sed sagittis eleifend rutrum. Donec vitae suscipit est. Nullam tempus tellus non sem sollicitudin, quis rutrum leo facilisis.

****Cras arcu libero****

: Aliquam metus eros, pretium sed nulla venenatis, faucibus auctor ex. Proin ut eros sed sapien ullamcorper consequat. Nunc ligula ante.

Lorem ipsum dolor sit amet Sed sagittis eleifend rutrum. Donec vitae suscipit est. Nullam tempus tellus non sem sollicitudin, quis rutrum leo facilisis.

Cras arcu libero Aliquam metus eros, pretium sed nulla venenatis, faucibus auctor ex. Proin ut eros sed sapien ullamcorper consequat. Nunc ligula ante.

Definition Blocks + Lists

- ****Lorem ipsum dolor sit amet****

: Sed sagittis eleifend rutrum. Donec vitae suscipit est. Nullam tempus tellus non sem sollicitudin, quis rutrum leo facilisis.

- ****Cras arcu libero****

: Aliquam metus eros, pretium sed nulla venenatis, faucibus auctor ex. Proin ut eros sed sapien ullamcorper consequat. Nunc ligula ante.

- **Lorem ipsum dolor sit amet** Sed sagittis eleifend rutrum. Donec vitae suscipit est. Nullam tempus tellus non sem sollicitudin, quis rutrum leo facilisis.

- **Cras arcu libero** Aliquam metus eros, pretium sed nulla venenatis, faucibus auctor ex. Proin ut eros sed sapien ullamcorper consequat. Nunc ligula ante.

Empty Section

An other section that is empty.

How does GNSS work?

Introduction

GPS (Global Positioning System), also known as NAVSTAR (NAVigation Satellite Time And Ranging) had its first satellite launched in 1978.

GPS segments

The GPS system consists of *three segments*:

1. **Space segment** (satellites with atomic clocks)
2. **Control segment** (ground stations for clock offsets)
3. **User segment** (receivers)

Radio Signal

The GPS radio signal contains:

- the **L-band carrier frequency** between 1 and 2 GHz
- the **Pseudo Random Noise** (PRN, also called the **spreading code**), unique to each satellite, publicly available
- the **navigation message** containing the satellite orbit and clock information

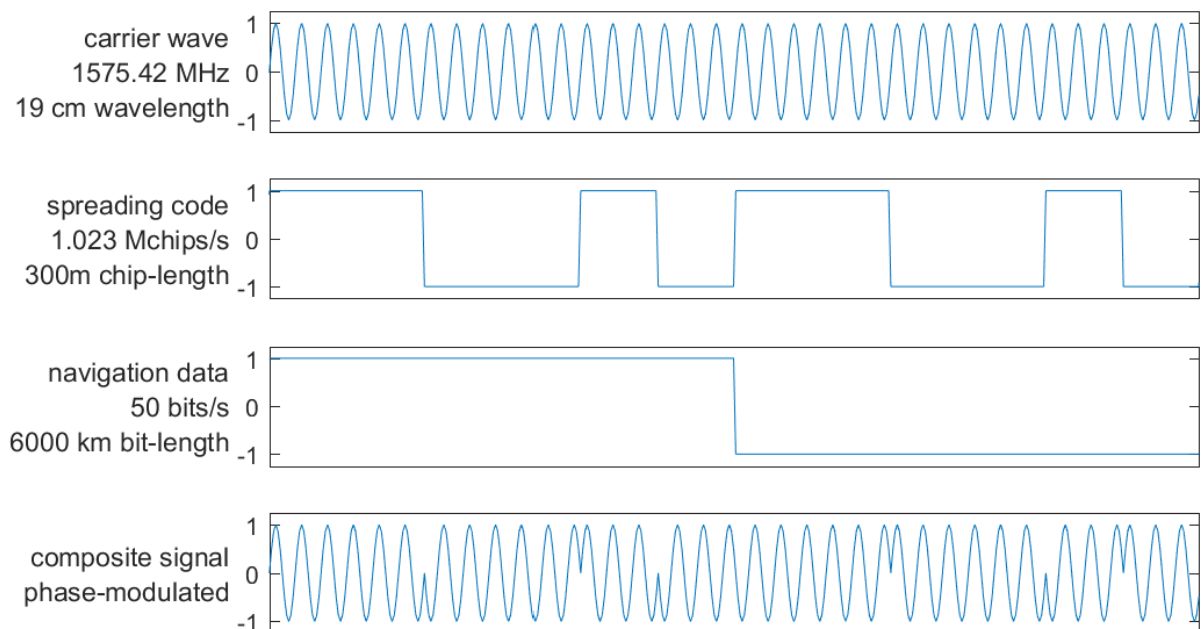


Figure 2: GPS L1 CA-signal (scale is not accurate)

Initialisation

When starting, GPS receivers try to find a particular GPS satellite on *each of their channels* (tens to hundreds). This is done by **overlaying the received signal** with a replica of the **spreading code** and then shifting it until correlation shows a maximum (best fit, or match).

Pseudorange Measurement

The **pseudorange** $p_{r,s}$ is calculated by multiplying the travel time $\tau_{r,s}$ by the speed of light c :

$$p_{r,s} = c \cdot \tau_{r,s} \text{ where } \tau_{r,s} = t_r - t_s$$

Carrier Phase Measurement

Carrier Phase Measurement:

- Measures **fractional phase difference** between the received *carrier wave* from the satellite and a locally generated *replica*.
- Provides a **very precise distance** measure (satellite to receiver)
- Needs to be **initialized** by finding the initial number of carrier wave cycles.
- Is much more precise than pseudorange code measurement. thanks to the **carrier period** being **much smaller** than code chip duration (in L1 CA-code signal, *1540 carrier periods* fit in one PRN spreading code chip).

Jamming and Spoofing

GPS Jamming

GPS Spoofing

GNSS performance

Introduction

Error Sources

Pseudorange Calculation

Multiple issues affect the calculation of the pseudorange:

- **satellite clock offset** (known).
- **receiver clock offset** (unknown).
- **ionosphere delay** (unknown).
- other errors, such as *multipath* (unknown).

The calculation is very sensible since $c \approx 3 \times 10^8$ m/s, and a **1 μ s** error will cause a **300 m** error in the calculated distance.

Ionosphere Delay

Ionospheric delay:

- Is due to **free electrons** in the ionosphere.
- Is highly variable (depends on **time** and **space**).
- Ranges from *a few meters to hundreds of meters*.
- Is maximum near geomagnetic equator, around local noon and during solar maxima.
- Is proportional to $1/\text{frequency}^2$.
- Can be estimated using two frequencies. This is why satellites emit at **L1** (1575.42 MHz) and **L2** (1227.60 MHz).

Accuracy and Precision

The quality of the measurement can be assessed through the carrier-to-noise-density ratio C/N_0 (signal strength).

The precision of the measurement depends on the method used:

Table 2: Precision of GNSS measurements

| | Pseudorange | Carrier Phase |
|-----------|------------------------------|-------------------------------|
| Precision | Few meters to few decimeters | Few centimeters to millimeter |

Dilution of Precision

Availability, Continuity and Integrity

Availability

Continuity

Integrity

PPP-RTK

Abbreviations

- **SV**: space vehicles or orbiting space vehicles
- **RTK**: Real-Time Kinematic
- **PPP**: Precise Point Positioning
- **PPP-RTK**: Hybrid of PPP and RTK
- **CORS**: Continuously Operating Reference Station
- **NRTK**: Network RTK
- **OSR**: Observation State Representation
- **SSR**: State Space Representation

PPP

- **PPP** achieves decimetre-level or better accuracy by leveraging corrections transmitted via satellite or the internet.
- It utilises the **SSR** message format for efficient data transmission.
- **PPP** is suitable for global applications due to its independence from regional base stations.
- The primary limitation of **PPP** is its long convergence time, typically ranging from 5 to 30 minutes.
- **PPP** primarily corrects for orbit errors, clock errors, and biases to achieve its positioning solution.
- **PPP** offers a trade-off between accuracy and coverage, providing moderate accuracy over a wide area.
- Variations like PPP-AR and A-PPP exist, offering enhanced accuracy or specialized capabilities.

RTK

- **RTK** provides centimetre-level accuracy, achieving the highest precision among the discussed technologies.
- **RTK** relies on the **OSR** message format, which requires a two-way communication channel between the base station and the rover.
- The coverage area of **RTK** is limited to a short range (30-50 km) due to signal degradation with distance.
- **RTK** boasts a near-instantaneous convergence time, typically under 5 seconds.
- **RTK** corrects for various errors, including orbit errors, clock errors, bias, ionospheric delay, and tropospheric delay.
- **RTK** is widely adopted in applications demanding high accuracy within a limited area, such as surveying and agriculture.
- Developments like Network RTK (NRTK) address range limitations by incorporating networks of base stations.

PPP-RTK

- **PPP-RTK** combines the strengths of PPP and RTK, offering high accuracy, global coverage, and fast convergence.
- **PPP-RTK** achieves centimetre-level accuracy comparable to RTK while offering global coverage.
- **PPP-RTK** employs the efficient **SSR** message format, enabling broadcast corrections and lower bandwidth requirements.
- **PPP-RTK** utilises a network of CORS stations for precise atmospheric and clock corrections.
- **PPP-RTK** converges significantly faster than PPP, typically within 1-10 minutes, and potentially seconds under ideal conditions.
- It effectively corrects for orbit errors, clock errors, bias, ionospheric delay, and tropospheric delay, allowing for integer ambiguity resolution.
- **PPP-RTK** gracefully degrades to standard PPP performance when outside the range of the CORS network.

Comparing RTK, PPP, and PPP-RTK

| Feature | RTK | PPP | PPP-RTK |
|-----------------------------|--|--|--|
| Accuracy | cm-level (up to 1 cm + 1 ppm) | dm-level or better (less than 10 cm) | cm-level , similar to RTK |
| Coverage Area | Limited range (typically 30-50 km from the base station) | Global | Global with graceful degradation to standard PPP outside the range of the CORS network |
| Message Format | OSR (Observation Space Representation) | SSR (State Space Representation) | SSR (State Space Representation) |
| Transmission Channel | Isionway communication between base station and rover | Corrections delivered via satellite or the internet | Corrections broadcast to users , enabling a large number of users to connect simultaneously |
| Convergence Time | Near-instantaneous (typically less than 5 seconds) | Relatively long (typically 5-30 minutes) | Fast (typically 1-10 minutes, potentially within seconds under ideal conditions) |
| Errors Solved | Orbit errors, clock errors, bias, ionospheric delay, tropospheric delay | Orbit errors, clock errors, bias | Orbit errors, clock errors, bias, ionospheric delay, tropospheric delay , enabling integer ambiguity resolution |
| Key Strengths | High accuracy, very fast convergence time | Global coverage, no reliance on local base stations | High accuracy, fast convergence time, global coverage, lower bandwidth requirements compared to RTK, graceful degradation outside CORS range |
| Key Limitations | Limited range, high bandwidth requirements, reliance on local base stations | Long convergence time, lower accuracy compared to RTK | Still requires a CORS network (though less dense than RTK) and may degrade to standard PPP with increasing distance from CORS station |

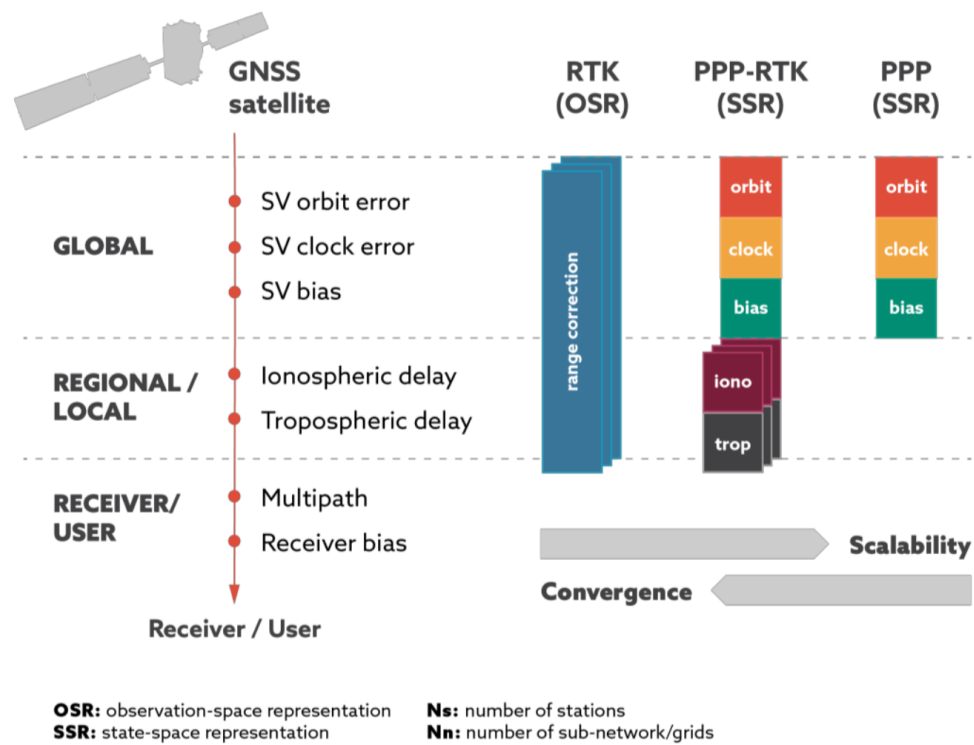


Figure 3: difference in message format and resolved errors

DGNSS

GNSS in the built environment (outdoor, indoor and in between)

Introduction

Multipath

Urban Canyon

Shadow Matching

CRS

Introduction

Coordinate Systems

Coordinate Reference Systems

Geographic Coordinate Reference Systems

Projected Coordinate Reference Systems

Linear Reference Systems

Terrestrial Reference Systems and Frames

Datum and Transformations

Transformations and conversions

Datums

Map Projections

RDNAP

Wi-Fi-monitoring / Fingerprinting

Introduction

Wi-Fi-Based Approaches

Wi-Fi Monitoring

Wi-Fi Fingerprinting