



Important safety and mounting instructions

EN

- Read and follow the safety and mounting instructions, keep these instructions easily accessible and always include them when passing the LH 64 on to third parties.
- Also read and follow the installation instructions contained in the operating manual of the studio monitor to be mounted.
- When mounting, follow the local, national and international regulations and standards.

Intended use

The LH 64 is a holder for fastening KH 80 DSP, KH 120, KH 120 II and KH 150 studio monitors to a 75 × 75 VESA mount. The LH 64 is only suitable for the above-mentioned 2-way monitors and must only be used indoors in dry, clean rooms such as studios.

To properly mount the LH 64 together with a studio monitor, you need additional products from the VESA 75 × 75 range of accessories, as well as additional fastening elements for mounting on the wall or a surface.

The LH 64 must not be used for other purposes or in other environments. In case of any damage or any deviation from the safety and mounting instructions, immediately dismount the studio monitor and the LH 64.

Required qualifications

Only skilled personnel may attach the LH 64 to the studio monitor and mount it on the wall. Due to his/her technical training, know-how and experience as well as knowledge of relevant provisions, regulations and standards, the specialist must be able to assess assigned tasks, recognize potential hazards and ensure appropriate safety measures.

Safety instructions for mounting

- Mount only one LH 64 to a studio monitor, as described in these assembly instructions. Centred suspension is recommended, see Figure 1a. When using the cinch sockets, the side suspension must be used, see Figure 1b.
- Place something soft underneath the studio monitor so that you do not scratch its surface while performing the work.
- Always use the enclosed original accessories.
- The wall or surface must be able to support the weight of the studio monitor and all accessories used, such that no parts will fall even if someone pulls hard on the power or audio cables. When calculating the weight, also take into account the additional leverage.
- When mounting the LH 64 on the wall or surface, use products from the VESA 75 × 75 range of accessories, as well as fastening

elements (not included with delivery) that are sufficiently dimensioned to ensure that the entire weight is held securely.

- Tighten all screws by hand. Once you have finished mounting and aligning the studio monitor, ensure that all screws are firmly tightened.
- Do not use the LH 64 in environments that are exposed to external vibrations.
- Every 3 months, check that all screws are properly tightened and that the LH 64, the studio monitor, the mounting accessories and the wall on which the LH 64 is mounted are in the proper condition.

Package contents

- | | |
|-----------------------------------|-------------------------------|
| A: 1 × adapter plate | D: 1 × Allen key, 4 mm |
| B: 2 × Allen screws, M8×12 | E: 1 × Allen key, 5 mm |
| C: 2 × Allen screws, M6×12 | |

Specifications



Weight	0.2 kg
Dimensions when assembled	96 × 98 × 22,5 mm (H × W × D)
Max. load	10 kg

Guarantee


For the current terms and conditions of the product guarantee please visit www.neumann.com.



1a

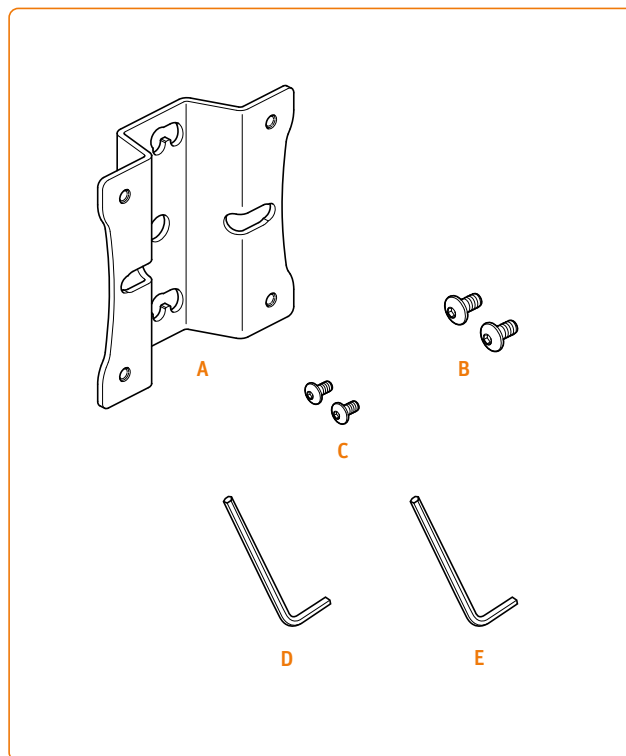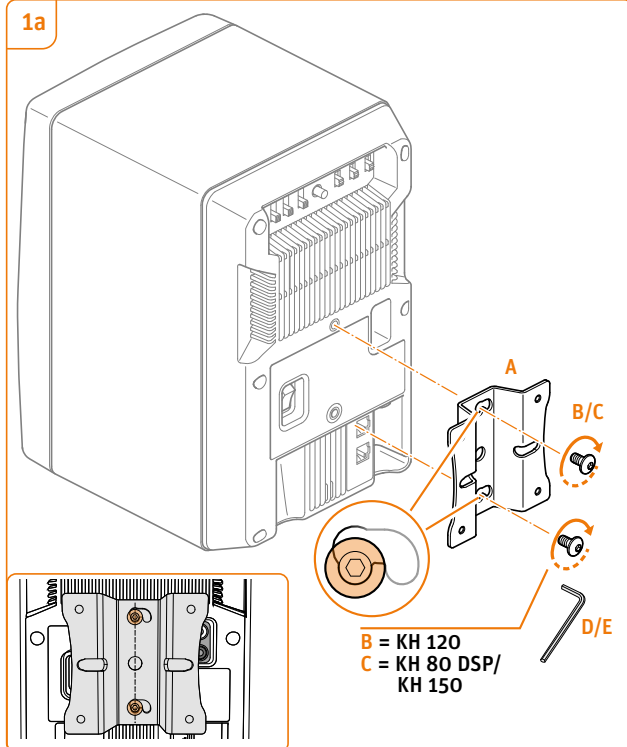

1b

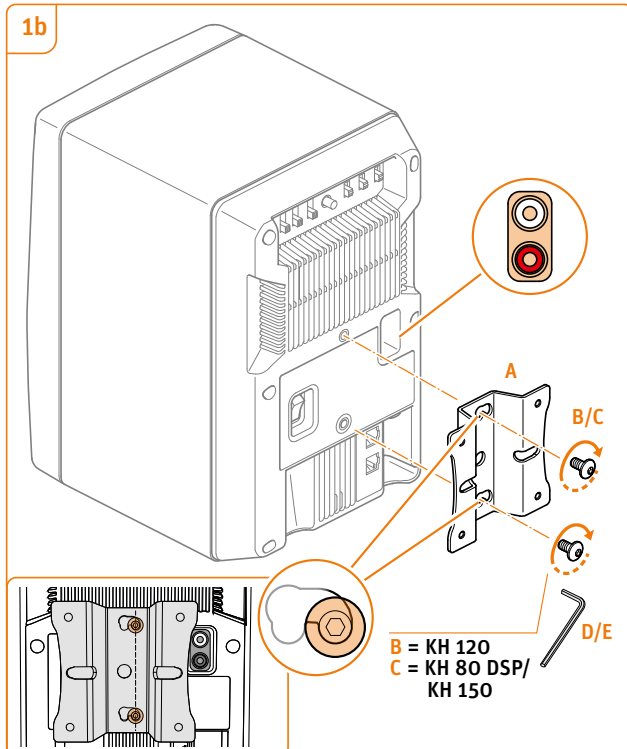

2

