



UNILOG
DERMA SOLUTIONS

DIODE & PICO 2-IN-1 LASER

EPIGLOW™





Powerful, Versatile & Effective Laser
Technology For Aesthetic Treatments



EPIGLOW

INTRODUCING THE DIODE & PICO 2-IN-1 LASER MACHINE

A Revolutionary Device Combining Diode Laser For Hair Removal & Pico Laser For Tattoo Removal, Pigmentation, And Skin Rejuvenation.

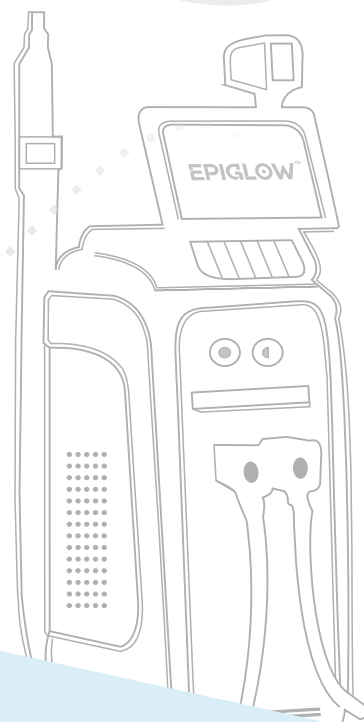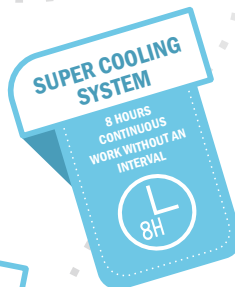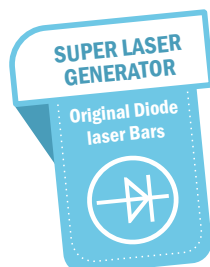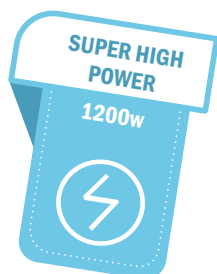

Before

After



PICO HANDLE FEATURES

5 PROBES FIVE WAVELENGTHS AVAILABLE



1064-F50

Eyebrow Wash Tattoo
Skin Stain Blasting



532

Light Coloured Tattoo
Wash Light Red Eyebrows And
Blue Hair Treatment no Trace,
No Pain ,no Repair Period



532-F50

Red Mouth, Yellow Green
And Light Coffee Pigments
Works On Washing Dark
Coloured Pigments



1064

Non invasive treatment
Remove melanin and stain
Dark pigments/ tattoo removal



1320-FO

Clean Pores, Improves Enlarged
Pores, Lighten Skin Tone, Balance
Skin Oil And Sebum (carbon Doll)



FUNCTIONS OF PICO HANDLE IN DIODE & PICO 2-IN-1 LASER DEVICE



Birthmark before & after



Dark spots before and after



Colorful tattoo before and after



Freckles before and after



DIODE HANDLE FEATURES



Super Short Pulse Duration
5-100ms Treatment Will Be Painless
Without Any Hyperpigmentation

Super Cooling System
8 Hours Continuous Work
Make Easy & Fast ROI



Triple Wavelength
1064nm + 808nm + 755nm
1200w Handle
Spot Size: 15x20mm
Works On All Skin Type
And Time
Efficient Treatment

Super Long Life Span
2 Million Shots Lifespan Make
Your Investment Much Valuable

Output Power: 1200w Fluence: 5-80j/cm
Head Temperature: -16° C High Peak Usa
Imported Laser Bar

From Black Hair To Light Hair
Suitable For All Hair Colors




From Black To White Skin.
Treats All Skin Types

FEATURES



Germany Imported Water Pump.
No Noise, Provide A Quiet And Comfortable
Environment For Patients.

Larger Water Flow For Better Cooling,
Prolong Laser And Machine Life.



Imported 316L Stainless Steel,
Better Cooling Longer Lifespan



Connector Practical And Elegant. Usa Cpc
Water Connector & Germany Harting
Electronic Connector, No Leakage Of Water
And Electricity, Safe And Reliable.



Alarm Of Water Flow. If No Water Inside Or Few
Water Inside Machine, It Will Alarm
Automatically-around Alarm And Stop Working
Immediately

Super Short Pulse Duration 5-100MS

Short Pulse Duration Reduces The Exposure Time Of The
Targeted Area, This Reduces Heat Through The Skin.

The Treatment Will Be Painless Without Any Hyperpigmentation.



INDICATIONS	ENERGY	DISTANCE	FILTER	FREQUENCY	END POINT	NUMBIN G
BLACK/DARK TATTOO	500	3-4 CM	1064	1-3Hz	frosting	yes
COLOR TATTOO ORANGE, RED, LIGHT GREEN, PINK ETC	500	3-4 CM	532	1-3Hz	frosting	yes
MELASMA	500	SKIN TOUCH	1064	1-3Hz	warm sensation	no
FREAKLES	500	3-4 CM	1064	1-3Hz	frosting	yes
PIGMENTATION	500	3-4 CM	1064	1-3Hz	frosting	yes
BIRTHMARK	500	3-4 CM	1064	1-3Hz	frosting	yes
HAIR BLEACHING	500	SKIN TOUCH	1064-F50	1-3Hz	bleached white hair	no
DARK LIPS	500	SKIN TOUCH	1064	1-3Hz	warm sensation	yes
EYEBROW TATTOO	500	2 CM	1064-F50	1-3Hz	frosting	yes
CARBON FACIAL	500	3-4 CM	1320-FO	1-3Hz	removal of carbon particles	no
SKIN BRIGHTENING	500	SKIN TOUCH	1064, 1320-FO	1-3Hz	warm sensation	no
RED TATTOO LIPS	500	3-4 CM	532	1-3Hz	heat and mild frosting	yes



LHR BY STAMPING MODE

Skint Ype	Energy(j/CM)	Pulse width(ms)	Freq(hz)
3	85-90 J	85-90 J	2-3
4	80-85 J	70-80 J	2-3
5	70-75 J	60-70 J	2-3
6	60-65 J	60-70 J	2-3

TECHNICAL SPECIFICATION

DESCRIPTION	DIODE + PICO LASER DEVICE
VOLTAGE	110V- 240V, 50HZ/60HZ
OUTPUT POWER	1200W + 1200W
LASER WAVELENGTH	755NM + 808NM + 532NM + 1320NM + 1064NM
755NM ENERGY	50-2500MJ (ADJUSTABLE)
1064NM ENERGY	50-2500MJ (ADJUSTABLE)
532NM ENERGY	50-2500MJ (ADJUSTABLE)
SCREEN SIZE	10.4INCH TOUCH SCREEN
FREQUENCY	1 - 10HZ (ADJUSTABLE)
INDICATOR OF AIMING LIGHT	RED SEMICONDUCTOR AIMING LIGHT
COOLING SYSTEM	FAN + WATER + CONDENSER
NUMBER OF SHOTS	MORE THAN 2 MILLIONS SHOTS
WATER SOURCE	PURE WATER/ DISTILLED WATER
CONTROL	FOOT SWITCH + PADEL
NET WEIGHT	AROUND 40 KG
PACKAGE	WOODEN BOX + FULL FOAM
PACKING SIZE	120X52X60CM
WORKING ENVIRONMENT	10-30°C

EPIGLOW™ THANKS

Welcome To Consult More!

