

LUMA 2000

DIODE LASER MACHINE

NEW GENERATION

SUPER DIODE LASER

HAIR REMOVAL MACHINE

Multi

Multi Spot Sizes

2000w

2000w High Power

Short

Super Short Pulse Duration



DIOLASH *ice* multi

INTELLIGENT TEMPERATURE MONITORING SYSTEM

Real-time monitoring of the surface temperature of the handle.



SAPPHIRE CRYSTAL

Best light and cold conductivity, ensuring the effectiveness and comfort of the treatment.

01



AMERICAN COHERENT LASER BAR

100 million shots warranty.

02



COLLIMATOR LENS FOCUS BEAM

Collimate the light path, reduce the divergence angle of the beam, and turn the divergent light path into a parallel light path.

03



360° COOLING PELTIER

108w super cooling power, the surface temperature of the spot can reach -30°C .

Four Wavelengths Optional

FOR ALL HAIR TYPES AND SKIN TYPES

755nm

For the fine and residual hair.



808nm

For general laser hair removal at a super speed.




940nm

Effectively penetrates deep and absorbed by the target chromophore.



1064nm

Deeper follicle penetration and darker skin focused.

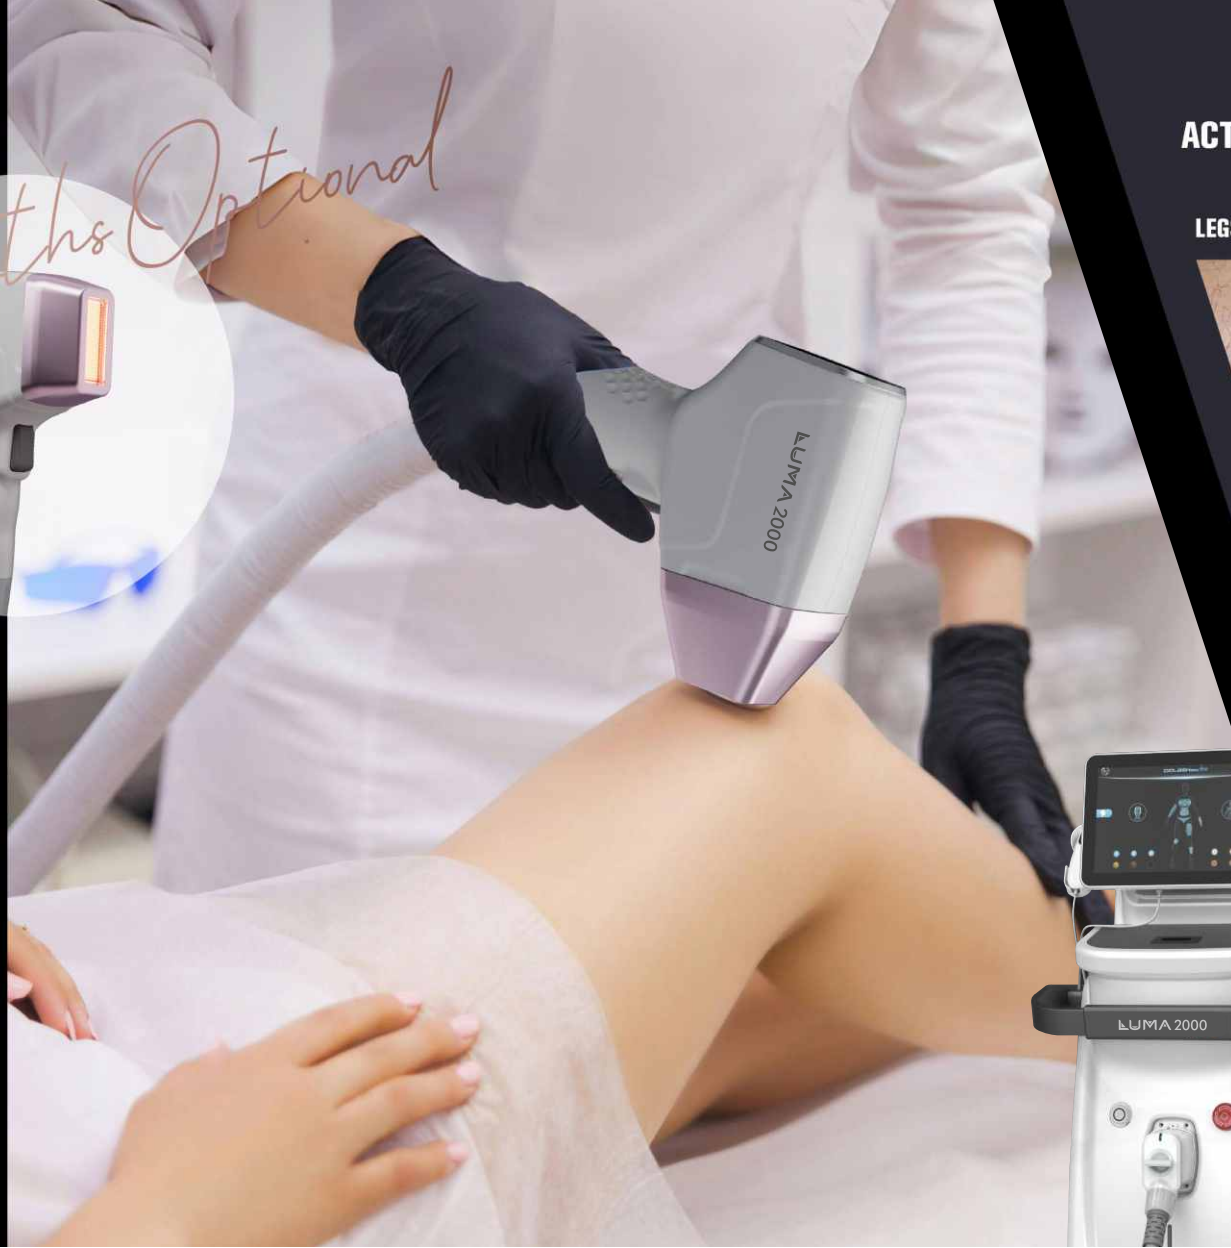

ACTUAL EFFECT OF DEPILATION

LUMA 2000

LEGS



Before



After

ARMPIT



Before



After

BACK



Before



After

BIKINI



Before



After

CHEEK



Before



After

LIP



Before



After



Advantage



IDENTIFIABILITY

The system can recognize different treatment heads automatically.

750G


LIGHTWEIGHT

The handle weighs only 750g, with humanized design, light and labor-saving





360° COOLING PELTIER

Cooling reaches -27.0°C in 2 minutes.



UNIFORM LIGHT SPOT

Uniform light spot, more safer and effective.

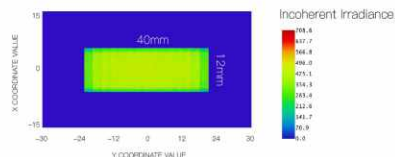

HAIR DETECTION TO INTELLIGENTLY



Unique al diode laser technology, equipped with hair detection the results of each treatment are visible to be seen.



Before



After one treatment



After two treatments



More Effective



Safer




More Professional

LUMA 2000



Multi Spot Sizes
Optional

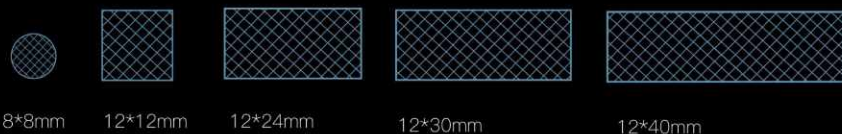

2000W HIGH POWER

MULTIPLE SPECIFICATIONS TREATMENT HEAD

A variety of different powers and different spot sizes are available to meet the treatment needs of different parts of the customer.



TOUCH SCREEN HANDLE

1.54-inch high-definition OLED touch screen, treatment parameters can be adjusted directly on the handle screen.



Frequency Adjustment



Energy Adjustment



Pulse Width Adjustment

