UV Disinfection System

The Ultimate Technology
For Water Disinfection

CE

UV Disinfection Concept:

Ultra violet light better known as UV; is one energy region of the EM spectrum.
The UV spectrum covers 4 regions; the wavelength useful for water treatment is 254nm (UV-C).
The maximum absorption of UV light by the nucleic acid which causes non-reparable damage to it occurs at wavelength 260nm. Therefore, germicidal lamps are designed to emit UV rays at 254nm, operating at a very close point to the optimum wavelength.
UV system operation is optimum when the following two conditions are satisfied:

- The intensity of the UV rays is properly selected.
- The exposure time is achieved.

Hence, proper design of a system is crucial to ensure proper disinfection.

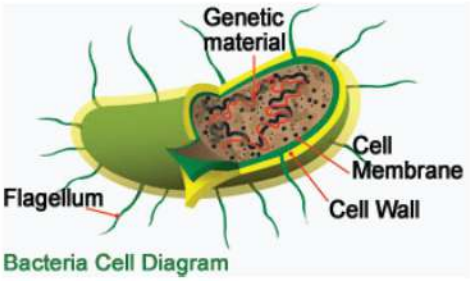

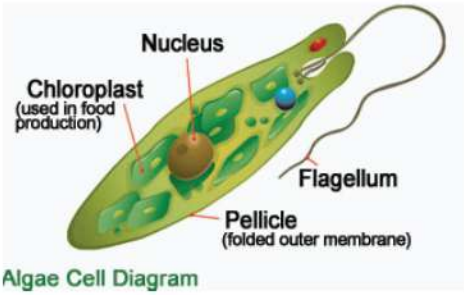

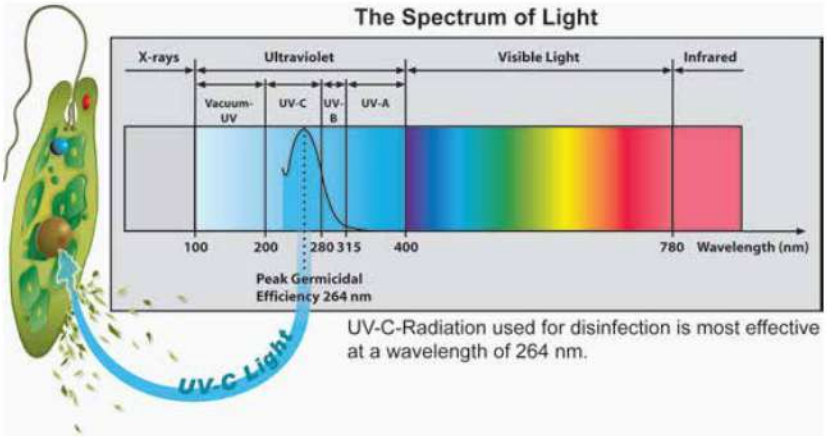

Applications:

The disinfection of potable water via UV is a proven process by international standards. UV system with high UV intensity is safe product for:

- Drinking Water
- Fish tanks/Ponds
- Waste water
- Fisheries
- Agriculture
- Ultra pure water

The UVSafe UV will not induce any chemical or change water quality.

Description & Advantages Of UVSafe:

- All UV stations supplied by Dosita are produced by genuine products produced as per Italian standards and specifications.
- The chamber is made of polished SS316 only.
- Amalgam doping, high intensity UV lamp - high flow for UVsafe6 and above .
- Our system is designed to high UV dose, which will ensure a very high kill rate of bacteria.
- Also our design is based on contact time at specified flow rate.
- Pressure tested up to 10 bars.
- Easy installation.

Models:

Dosita offers a wide range of standard UV Stations, which cover wide range for single flat, villa and residential / commercial towers.

Other than standard, we are offering custom design UV Station to meet high flow rate.

Standard Range:

Model No	Flow rate m3/hr	No of lamps	Power (W)	Volts (V)	Running Hours	Dimension (mm)	Diameter (mm)	In/out (inch)
UVsafe4	4.8	1	36	220	13000	860	63	2
	3.6							
UVsafe5	9.6	1	80	220	13000	860	101	2
	7.2							
UVsafe6	12.6	1	120	220	13000	860	101	2
	9.45							
UVsafe7	21.0	1	210	220	13000	1156	101	2
	18.4							
UVsafe8A	31.0	3	315	220	13000	860	168	2
	28.0							
UVsafe8	42.0	2	420	220	13000	1156	168	3
	38.0							
UVsafe9A	59.0	3	546	220	13000	1156	168	4
	48.0							
UVsafe9	69.0	3	630	220	13000	1156	168	4
	65.0							
UVsafe10	96.0	4	840	220	13000	1156	220	4
	89.0							

Note: UVSafe8A and UVSafe9A will be available with minimum quantity

Our products are rated at acceptable international standards (NSF/EPA/DIN), and all at T_{100}=70% transmission, ΔT_{water}= 5k

UVSafe 4 to be reduced to 1 inch by customer.
UVSafe 5,6,7 has PVC female socket.
UVSafe 8- 3inch SS flange, UVsafe9,10- 4inch SS flange

* Rated flow rate at 30mj/cm^2
** Rated flow rate at 40mj/cm^2

- Other sizes are available upon request
- Options UVI monitoring, flow switches are available upon request



Dosita Havuz Ve Su TEK- Turkey

0090 262 502 3097
info@dosita.com.tr
www.dosita.com.tr