

# Factory Specification Sheet

Standard Printed Gaming Desk Mat / Extended Mouse Pad + Pro Control Performance Series

Main market: Saudi Arabia / GCC | Document scope: two product tiers for supplier quotation | Revision: v2.0 | Date: 03 July 2026

**Purpose of this document**  
Send this document to potential factories/suppliers to confirm capability, request samples, and collect quotations. The product positioning is mid-premium: do not quote the cheapest low-quality foam pad. Priorities are smooth tracking, strong edge stitching, low odor, flatness, and clean printing.

Figure 1 - Product overview: Extended Gaming Desk Mat

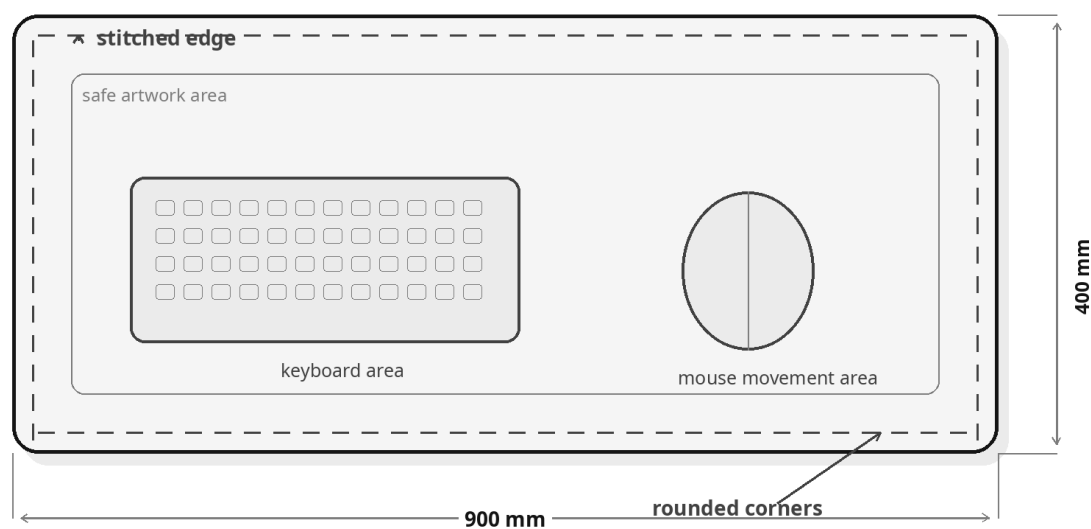


Figure 1. Target product overview and main dimensions.

## 1. Product brief

| Item         | Requirement                                                                                            |
|--------------|--------------------------------------------------------------------------------------------------------|
| Product name | Premium Printed Gaming Desk Mat / Extended Gaming Mouse Pad                                            |
| Main size    | 900 x 400 x 4 mm finished size                                                                         |
| Use case     | Gaming setups, PC desks, office desks, streamer merch, esports team merchandise, custom name/logo pads |
| Product type | Soft fabric-top desk mat with anti-slip rubber base; no electronics/RGB in version 1                   |
| Positioning  | Mid-standard product with good surface feel, clean print, stitched edges, and reliable packaging       |

**Factory instruction:** Please quote exactly according to the specifications below. If you propose an alternative material, printing method, packaging method, or tolerance, clearly mark it as an alternative and provide a reason.

2. SKUs and variants to quote

| SKU              | Finished size | Thickness | Edge finish                                                                            | Notes                          |
|------------------|---------------|-----------|----------------------------------------------------------------------------------------|--------------------------------|
| PGM-9040-4MM     | 900 x 400 mm  | 4.0 mm    | Black stitched edge                                                                    | Main launch SKU. Quote first.  |
| PGM-PRO-9040-4MM | 900 x 400 mm  | 4.0 mm    | Soft performance foam base (SlimFlex / PORON-style or equivalent high-density PU foam) | Pro Control Performance Series |

**Important commercial note**  
For the first order, quote 900 x 400 x 4 mm as the primary product.

3. Core technical specifications

| Feature            | Requirement                                                              | Acceptance notes                                                                                 |
|--------------------|--------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------|
| Finished size      | 900 x 400 mm for main SKU.                                               | Length/width tolerance: ±5 mm unless a tighter tolerance is offered.                             |
| Finished thickness | 4.0 mm.                                                                  | Tolerance: ±0.4 mm across the mat. No thin corners or uneven thickness.                          |
| Corner shape       | Rounded corners.                                                         | Target radius: 10-20 mm; all corners must match.                                                 |
| Top surface        | Tightly woven polyester microfiber/fabric surface.                       | Balanced control/speed feel; smooth tracking for optical and laser gaming mice; no loose fibers. |
| Printing           | Full-surface sublimation or high-quality heat-transfer print.            | No cracking, peeling, pixelation, color banding, ghosting, or blurry edges.                      |
| Artwork resolution | Minimum 300 DPI at actual size.                                          | Factory must provide template and digital mockup before sample.                                  |
| Rubber base        | High-quality natural rubber, SBR rubber, or equivalent anti-slip rubber. | Low odor. No strong chemical smell. Supplier to declare exact rubber type.                       |
| Underside texture  | Anti-slip pattern on bottom side.                                        | Must resist sliding on wooden, laminate, and glass desks under normal use.                       |
| Lamination/bonding | Fabric and rubber must be firmly bonded.                                 | No bubbles, waves, wrinkles, glue marks, edge lifting, or delamination.                          |
| Edge stitching     | Black stitched/locked edge by default.                                   | Neat continuous stitching; no loose threads; seam should not interfere with mouse movement.      |
| Flatness           | Product should lay flat after unrolling.                                 | After 24h at room temperature, edge curl should be minimal; target max edge lift: 10 mm.         |
| Surface resistance | Splash-resistant top surface preferred.                                  | Water drops should wipe off without immediate staining; not marketed as fully waterproof.        |
| Odor requirement   | Low-odor material only.                                                  | No strong smell immediately after opening. Reject if smell remains strong after 24h airing.      |
| Weight feel        | Mid-heavy stable desk mat.                                               | Supplier to confirm actual weight; avoid a very light foam feel unless approved.                 |

Figure 2 - Layer construction / cross-section

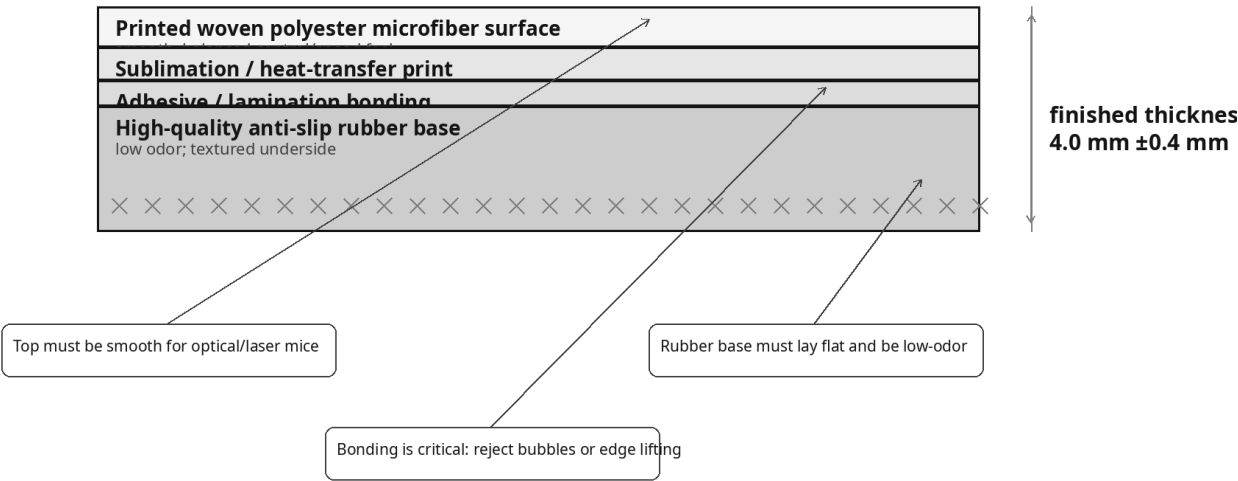


Figure 2. Required layer construction and quality-critical bonding points.

4. Artwork and print requirements

| Print item      | Requirement                                                                                                                          |
|-----------------|--------------------------------------------------------------------------------------------------------------------------------------|
| Template size   | For 900 x 400 mm finished product, prepare artwork at 920 x 420 mm including 10 mm bleed on all sides.                               |
| Safe area       | Keep important text, logos, names, QR codes, and icons at least 20 mm inside the final trim/stitch line.                             |
| File formats    | Preferred: AI, PDF, PSD, TIFF, or high-resolution PNG. Factory must confirm supported formats.                                       |
| Color proof     | Factory must send a digital mockup and a printed pre-production sample before bulk production.                                       |
| Print alignment | Target alignment tolerance: ±3 mm from approved mockup/sample.                                                                       |
| Copyright/IP    | Factory may print only artwork supplied/approved by buyer. Factory must not reuse, resell, or show buyer artwork without permission. |

Figure 4 - Artwork template: bleed, trim, and safe area

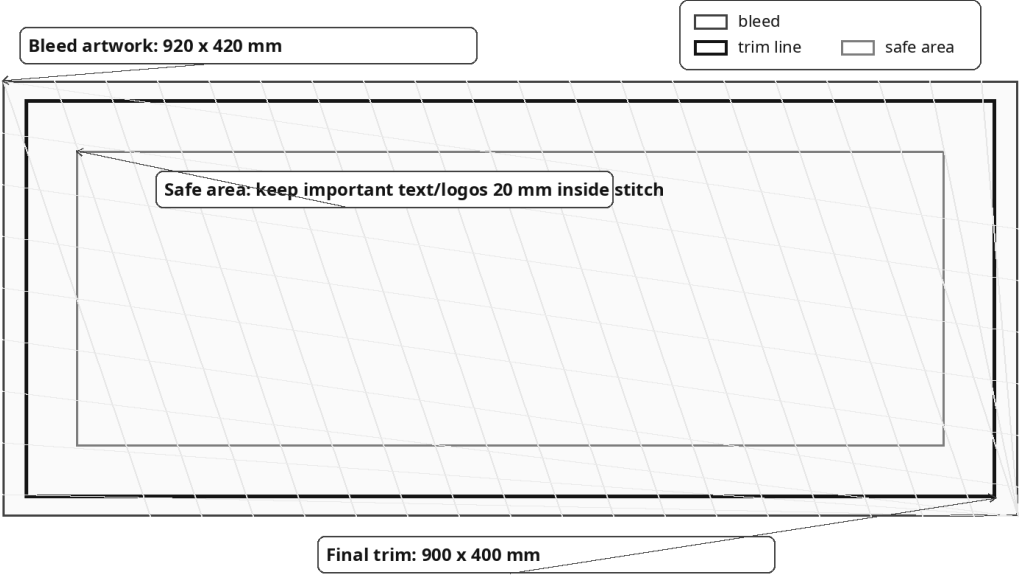


Figure 3. Artwork bleed, trim, and safe area template for the main SKU.

5. Edge stitching and finishing

| Requirement          | Details                                                                                   |
|----------------------|-------------------------------------------------------------------------------------------|
| Stitch type          | Continuous stitched/locked edge. Supplier to specify stitch method and thread material.   |
| Default stitch color | Black. Other colors only if buyer approves.                                               |
| Seam zone            | Approx. 2-3 mm from edge, consistent around all sides.                                    |
| Thread quality       | No loose threads, missed stitches, fraying, or unraveling.                                |
| Cut finish           | Clean cut, rounded corners, no rough/sharp edges, no burned marks.                        |
| Mouse movement       | Stitched edge must feel smooth and should not catch the mouse or wrist during normal use. |

Figure 3 - Stitched edge and rounded corner detail

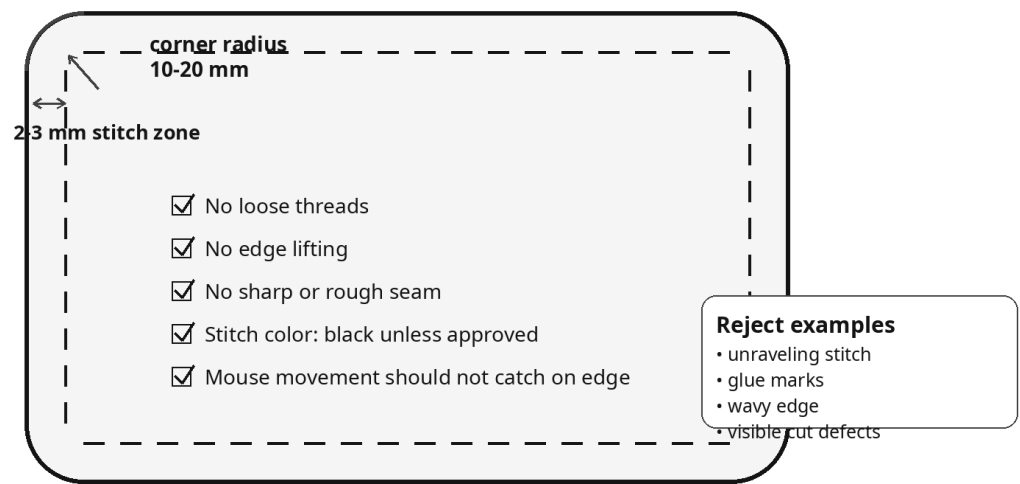


Figure 4. Stitched edge and rounded corner acceptance expectations.

6. Individual packaging and master carton

| Packaging item       | Requirement                                                                                                                      |
|----------------------|----------------------------------------------------------------------------------------------------------------------------------|
| Individual packaging | Each unit packed in protective sleeve, polybag, kraft tube, or rectangular box. Quote available options separately.              |
| Roll direction       | Supplier to recommend roll direction. Final sample must pass flatness test after unrolling.                                      |
| Protection           | Packaging must prevent dust, moisture, edge damage, and print scratches during shipping.                                         |
| Insert card          | Optional small product card with brand, care instructions, and QR code. Quote separately.                                        |
| Label                | Each unit label should show SKU, design name/code, size, quantity, batch number, barcode/FNSKU field if required.                |
| Master carton        | Supplier to propose carton quantity and size. Keep carton weight manageable; target max 15-20 kg/carton unless otherwise agreed. |
| Carton marking       | Carton label must include buyer name, PO number, SKU, design code, carton number, quantity, gross/net weight, carton dimensions. |

Figure 5 - Packaging concept: rolled mat + label + master carton

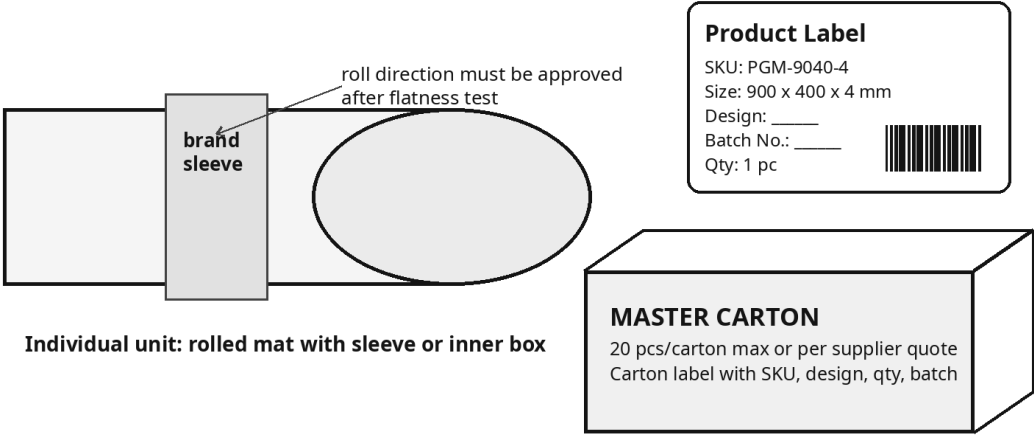


Figure 5. Packaging concept for quotation; final packaging to be approved after sample.

## 7. Quality control checklist

| QC item          | How to test                                                            | Acceptance criteria                                                           |
|------------------|------------------------------------------------------------------------|-------------------------------------------------------------------------------|
| Dimensions       | Measure length, width, and thickness.                                  | Within tolerance; no uneven thickness or distorted shape.                     |
| Surface tracking | Test with common optical gaming mouse at low and medium DPI.           | Smooth movement; no rough drag, skipping, or inconsistent texture.            |
| Print quality    | Inspect from 50 cm and close range.                                    | No banding, blur, color shift, stains, ghosting, scratches, or missing print. |
| Rub test         | Rub printed surface with dry and slightly damp white cloth, 20 cycles. | No visible ink transfer or surface damage.                                    |
| Water drop test  | Place water drops for 5 minutes, wipe clean.                           | No immediate permanent stain or surface swelling.                             |
| Anti-slip test   | Use on wood/laminate/glass desk.                                       | Mat should not slide under normal mouse and keyboard use.                     |
| Flatness test    | Unroll and leave at room temperature.                                  | Target: lies flat within 24 hours; edge lift max 10 mm.                       |
| Odor test        | Open sample and smell after 0h and 24h airing.                         | No strong chemical/rubber odor after 24h.                                     |
| Edge/stitching   | Inspect all sides and corners.                                         | No loose threads, unraveling, wavy edge, stitch gaps, or edge lifting.        |
| Packaging        | Drop/handling simulation if possible.                                  | No crushed edges, scratched print, torn sleeve, or dirty product.             |

### Suggested inspection level

For bulk orders, buyer may use AQL 2.5 for major defects and AQL 4.0 for minor defects unless another inspection standard is agreed. Critical defects: delamination, strong odor, wrong artwork, wrong size, severe print defects, unsafe/sharp finish, or major packaging damage.

## 8. Sample approval process

| Step | Requirement                                                                                                 |
|------|-------------------------------------------------------------------------------------------------------------|
| 1    | Factory sends material photos/video and confirms exact available base options: economy, standard, standard. |
| 2    | Factory sends blank material samples or existing sample pads if available.                                  |
| 3    | Buyer selects base material and sends artwork/template.                                                     |
| 4    | Factory sends digital mockup for approval before printing.                                                  |
| 5    | Factory produces 2 physical pre-production samples per approved design.                                     |
| 6    | Buyer tests samples for tracking, print quality, smell, flatness, stitching, and packaging.                 |
| 7    | Bulk production starts only after written sample approval. Bulk must match the approved sample.             |


## 9. Supplier quotation form

| Question                                         | Supplier answer |
|--------------------------------------------------|-----------------|
| Factory legal name                               |                 |
| Contact person / WhatsApp / WeChat / Email       |                 |
| Factory location                                 |                 |
| Main product type offered                        |                 |
| Available material options and rubber type       |                 |
| Available thicknesses                            |                 |
| Printing method                                  |                 |
| MOQ per design                                   |                 |
| MOQ per size                                     |                 |
| Sample cost                                      |                 |
| Sample lead time                                 |                 |
| Bulk lead time after deposit/sample approval     |                 |
| Monthly capacity                                 |                 |
| Unit price for 100 pcs                           |                 |
| Unit price for 300 pcs                           |                 |
| Unit price for 500 pcs                           |                 |
| Unit price for 1,000 pcs                         |                 |
| Unit price for 3,000 pcs                         |                 |
| Setup/tooling/design fees                        |                 |
| Packaging options and cost                       |                 |
| Available trade terms: EXW / FOB / CIF / DDP     |                 |
| Nearest port/airport                             |                 |
| Payment terms                                    |                 |
| Certificates/material safety documents available |                 |
| Warranty/claim policy for defective units        |                 |

## 10. Design direction examples

These are example directions only, not final artwork. Supplier should not copy external game, anime, sports, streamer, or brand logos unless written approval/rights are supplied by buyer.

**Figure 6 - Example design directions (not final artwork)**

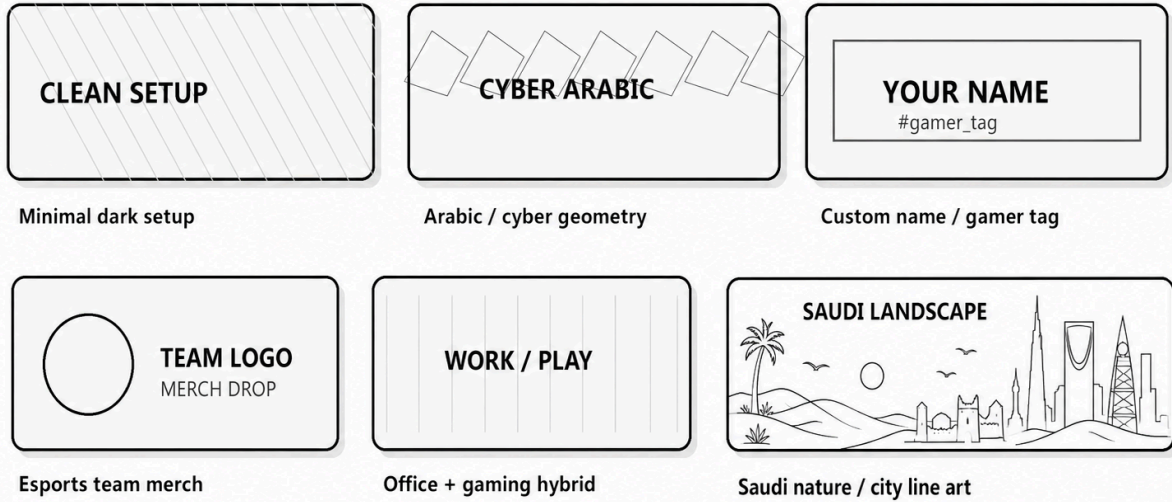

Use original artwork only. Original artwork can include Saudi-inspired illustrated city or nature concepts. Do not print copyrighted logos/characters unless buyer supplies written approval/rights.

**Figure 6. Example visual directions for the Saudi/GCC gaming setup market.**

## 11. Supplier confirmation before order

| Confirmation item                                                | Supplier response       |
|------------------------------------------------------------------|-------------------------|
| Can you produce 900 x 400 x 4 mm with stitched edge?             | Yes / No / Alternative: |
| Can you provide low-odor rubber?                                 | Yes / No / Details:     |
| Can you print full-bleed custom artwork?                         | Yes / No / Method:      |
| Can you match approved pre-production sample in bulk?            | Yes / No / Comments:    |
| Can you provide product photos/videos before shipping?           | Yes / No / Comments:    |
| Can you pack each piece individually with label?                 | Yes / No / Options:     |
| Can you keep buyer artwork confidential and not reuse/resell it? | Yes / No                |

### Buyer approval rule

No bulk production, artwork changes, material substitutions, packaging changes, or label changes are allowed without written buyer approval. Bulk production must match the final approved pre-production sample.

## 12. Suggested care instructions for insert card


| Topic    | Text                                                                                         |
|----------|----------------------------------------------------------------------------------------------|
| Cleaning | Wipe with damp cloth. For deeper cleaning, gently hand wash with mild soap and air dry flat. |
| Do not   | Do not machine wash, bleach, iron, tumble dry, or expose to direct heat for long periods.    |
| Use      | Use on a clean, flat desk surface. Allow mat to lay flat after unrolling.                    |

## 13. Product B - Pro Control Performance Series (additional quotation tier)

**Purpose.** This product tier is to be quoted in addition to Product A. It keeps the same finished size as the main desk mat (900 x 400 x 4 mm), but shifts the construction toward competitive-gaming performance rather than full-surface printed lifestyle use.

**Reference direction.** This tier is inspired by the public performance characteristics listed on the Jupiter Pro (v2) product page by Lethal Gaming Gear, including a control / very slow surface, a SlimFlex (formerly PORON) style foam base with hardness options, low-profile stitched edges, a polyester-blend surface, and 4 mm thickness for non-Firm variants. In this document, the recommended launch version is **SOFT** at 4 mm thickness.

| Feature                     | Product B requirement                                                                                                                                                                           |
|-----------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Product code                | PGM-PRO-9040-4MM                                                                                                                                                                                |
| Finished size               | 900 x 400 mm                                                                                                                                                                                    |
| Thickness                   | 4.0 mm finished thickness                                                                                                                                                                       |
| Base material               | Soft performance foam base. Preferred: SlimFlex / PORON-style foam or equivalent high-density PU performance foam. Supplier must disclose exact base material proposed.                         |
| Recommended hardness        | SOFT (recommended launch version). Do not quote Firm as the default launch version because Firm typically changes the feel and may reduce thickness to 3 mm in benchmark products.              |
| Surface material            | Mostly smooth yet lightly textured polyester-blend fabric surface.                                                                                                                              |
| Surface behavior            | Control / very slow glide with ample stopping power. Intended for FPS / tactical shooter use.                                                                                                   |
| Printing / visual treatment | No full-surface art print required by default. Visual direction should be minimal, premium, and understated. Small logo lockup only unless buyer requests a special edition.                    |
| Edge finish                 | Low-profile stitched edges; edge height should remain subtle and not feel bulky under the wrist.                                                                                                |
| Bottom grip                 | Strong anti-slip behavior on desk surfaces. No sliding during normal gaming use.                                                                                                                |
| Odor                        | Low odor preferred. Any initial foam/rubber smell should be limited and should dissipate after airing out.                                                                                      |
| Packaging                   | Preferred for sample and launch quote: flat-packed premium carton if practical. If flat packing is not practical, supplier must propose the safest rolled packaging that minimizes memory curl. |
| Logo / branding area        | Small branding only, typically at one corner or edge. Avoid heavy artwork coverage on the standard version.                                                                                     |
| Use case                    | Competitive gaming / esports / premium control mousepad line.                                                                                                                                   |

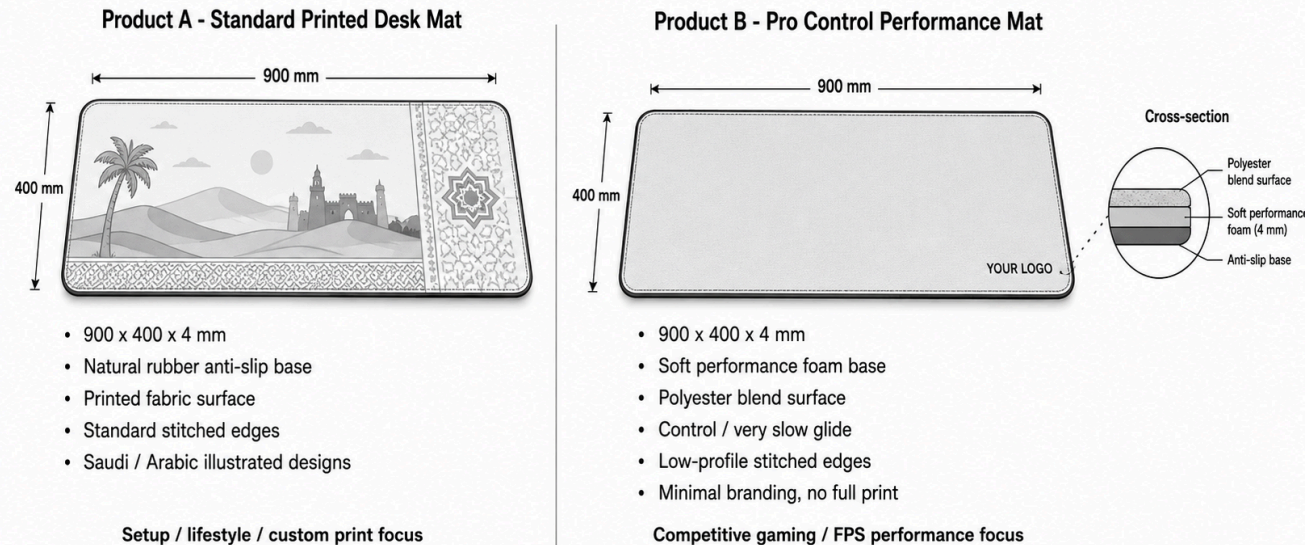**Figure 7 - Two product tiers for quotation**

**Recommended default for Product B: SOFT base hardness.**

**Reason:** balanced comfort and control while preserving 4 mm thickness; safer launch option than Firm or Xsoft.

Figure 7. Comparison of Product A (standard printed desk mat) and Product B (pro control performance series).

## 14. Additional QC points for Product B

| QC item                     | How to test                                                              | Acceptance criteria                                                                              |
|-----------------------------|--------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------|
| X/Y glide consistency       | Test with gaming mouse using straight and diagonal movements.            | Glide should feel even and controlled in both axes, with no scratchy zones or inconsistent drag. |
| Stopping power              | Short-stop movement and micro-adjustment test in FPS use simulation.     | Pad should offer high control and predictable stopping without muddy or sticky feel.             |
| Surface uniformity          | Visual inspection plus hand-feel across the full surface.                | No rough patches, print marks, loose fibers, or texture inconsistency.                           |
| Low-profile edge comfort    | Wrist contact and glide-over-edge test.                                  | Edge stitching should feel low and refined, with no raised ridge that distracts the player.      |
| Compression rebound         | Press and release foam base at several points.                           | Soft base should rebound quickly and consistently; no dead spots or uneven compression.          |
| Memory curl after unpacking | Unpack from final packaging and lay flat on desk.                        | Mat should flatten quickly with minimal corner lift or edge curl.                                |
| Humidity sensitivity check  | Basic high-humidity handling or storage simulation if supplier can test. | Surface should remain stable in feel; no major slowdown, tackiness, or warping.                  |

## 15. Supplier quote request for two-tier program

- Please quote Product A and Product B separately, including EXW price, MOQ, sample cost, sample lead time, mass-production lead time, and carton details.
- Please state clearly whether your Product B base is original SlimFlex / PORON, a PORON-style equivalent, or another high-density PU performance foam.
- Please send photos/video and at least one sample for both Product A and Product B before any production commitment.

Confidential draft for supplier quotation - Buyer artwork/designs must not be reused or resold.

- If you cannot meet the Product B requirement exactly, propose your closest equivalent and explain the trade-offs in performance and cost.