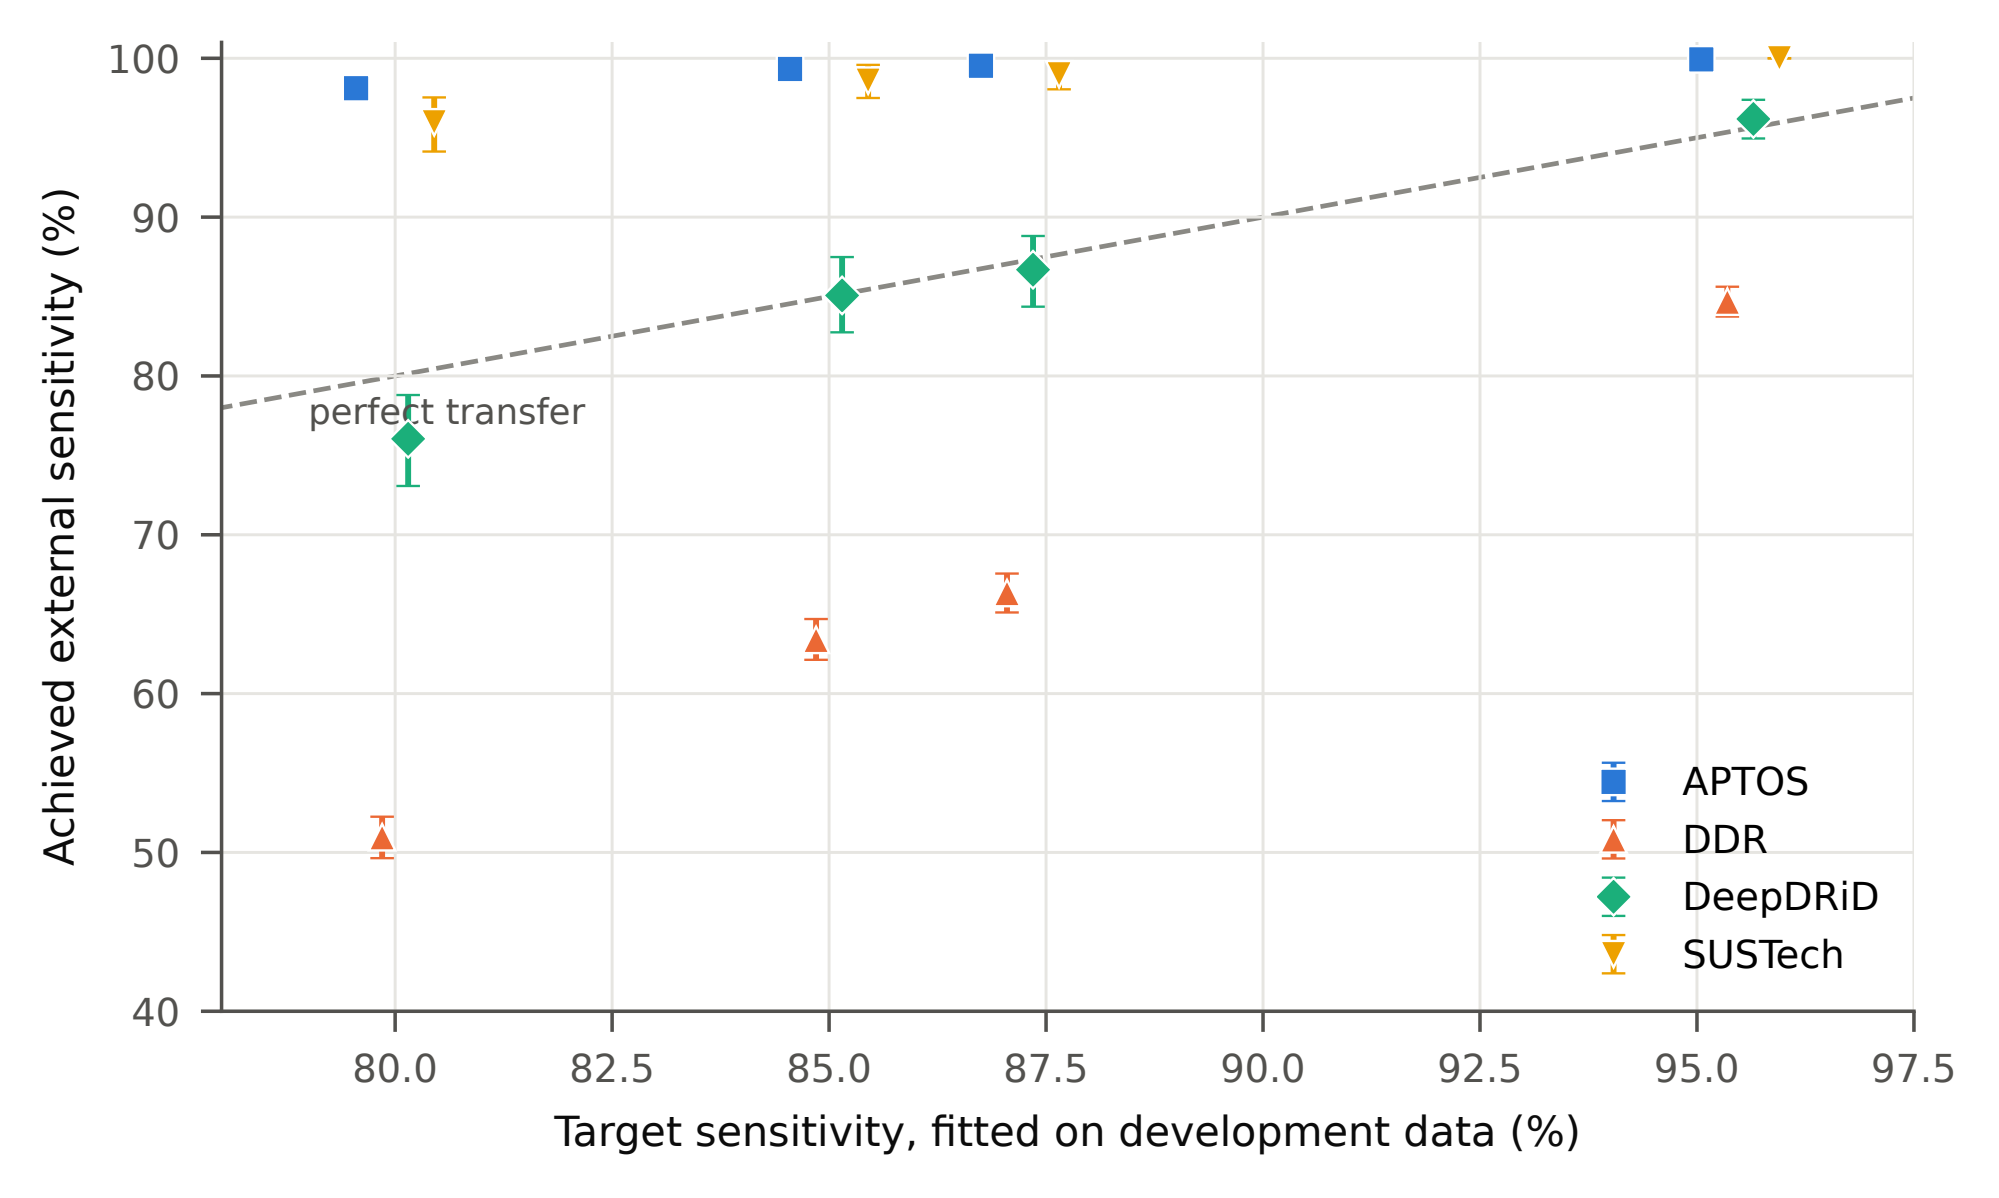
Achieved external sensitivity (%)
100
90
80
70
60
50
40
perfect transfer
80.0
82.5
85.0
87.5
90.0
92.5
95.0
97.5
Target sensitivity, fitted on development data (%)
APTOS
DDR
DeepDRiD
SUSTech