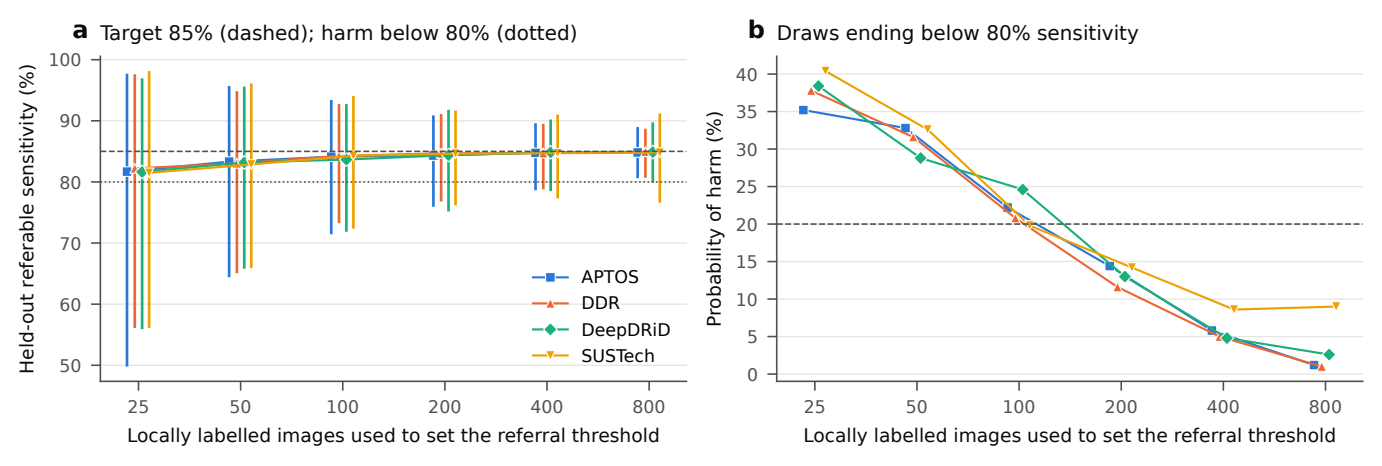
a
Target 85% (dashed); harm below 80% (dotted)
Held-out referable sensitivity (%)
100
90
80
70
60
50
APTOS
DDR
DeepDRiD
SUSTech
25
50
100
200
400
800
Locally labelled images used to set the referral threshold
b
Draws ending below 80% sensitivity
Probability of harm (%)
40
35
30
25
20
15
10
5
0
25
50
100
200
400
800
Locally labelled images used to set the referral threshold