

---

# Controlling multiple drones autonomously inspired by birds ability to keep formation

---



*University:*  
UNIVERSITY OF SOUTHERN DENMARK

*Author:*  
MATHIAS MIKKEL NEERUP

Bachelor Thesis

*In cooperation with:*  
Jussi Hermansen  
Info@viacopter.eu  
Cottagevej 4  
3300 Frederiksvaerk

*Supervisor:*  
Kjeld Jensen  
kjen@mmmi.sdu.dk  
Maersk Mc-Kinney Moeller  
University of Southern Denmark

June 1, 2016

Mathias: : A bachelors thesis (15 ECTS) report from a single student should have a length no more than 35 pages plus maximum 10 pages of appendices.

: A bachelors thesis (15 ECTS) report from a single student should have a length no more than 35 pages plus maximum 10 pages of appendices. . . . .	B
Implementation: Write shortly about the implementation Chapter . . . . .	7
Implementation: Less calculations on the drone, better to move to another computer/-cluster with more power than the drone has available from its battery . . . . .	7
Implementation: Image of camera and drone seen from the side. Show what happens to the drones position estimation when it drifts down/up . . . . .	7
Data Object Code: eksempel på hvordan de bliver brugt i koden - vise function id i switch/case . . . . .	10
Data Object Code: Dscribe how the node is created on the BUS . . . . .	10
Vision based localization: Smaller dot size - almost impossible to see the drone in the frames.. . . .	12
Vision based localization: Red is above blue, not because the drone wasn't detcted . . .	12
Vision based localization: Wifi test distance, see what happens to latency . . . . .	12
Block schmeatic: Create schematic appendix . . . . .	13
Block schmeatic: Add GPS, WIFI, PCB, PC to forkortelses liste . . . . .	13
Block schmeatic: Thanks to Carsten Albertsen for PCB development . . . . .	13
Wireless Communication: 'footnotemark til at referere til samme fodnote flere gange .	15
Wireless Communication: vægt på ESP til 3 gram med link - det er hvad der er oplyst. Efterfølgende skrive at det er vejlet til 1.51 gram(hen mod slutningen) . . . . .	15
Debug/ISP: Refer to image of board . . . . .	15
Test Descriptions: Maybe a chapter called "Test Descriptions here" . . . . .	17
Test of spoofed positions outdoore: Opdater billede med test-equipment . . . . .	28

Until now drones keeps getting bigger and larger to carry bigger batteries with more capacity and to lift heavier payloads. This leads to drones getting less efficient, less responsive and gets more dangerous. Instead it has become popular to make drones smaller and increase the number of drones needed to solve a task.

### Materials & methods

This thesis describes how to make three drones follow a leader drone with a preprogrammed path as an example of drones cooperating. A Linux PC running MarkerLocator tracks each drones position and wirelessly transmits, using Xbee, the drones positions to all drones. The position of each drone is spoofed into the drone using the CAN-bus and thereby overwriting the onboard GPS. An outdoor test has been made using the onboard GPS to test the leader-follower algorithm in a bigger scale. A small PCB has been developed and mounted on each drone to route packages from the Xbee module to the CAN-bus of the drone and to measure the local altitude of the drone using a ultrasonic sensor. The PCB carries an AT90CAN128 as microcontroller which build-in CAN support making it obsolete to carry an external USB CAN-controller.

### Results -& discussion

The accuracy of the vision based localisation is measured using a laser pointer pointing out the drones 2D position on the floor making it possible to measure the variance of the drones position. The leader-follower algorithm was also tested outside using the onboard GPS. The performance of the leader-follower algorithm is measured and discussed using plots that reveals the distance between the drones.

### Conclusion -& perspective

It is shown that it is possible to implement the leader-follower algorithm using a vision and ultrasonic based positioning system. The distance between all drones when flying indoor was +/- 10 cm which is less than the maximum accepted error. It was possible to add 5 follower-drones without editing the code showing it is a generic system. The system can further be used to indoor testing of navigation algorithms and explore the many possibilities drones has to offer. If drones at some point needs to fly indoor to help eg. Mobile robots navigating, vision might be a way to obtain a absolute indoor position for the drones.

Thanks to:

- Kjeld Jensen
- Anna ..
- Mads ...

---

## Table of Contents

---

<b>Abstract</b>	<b>ii</b>
<b>Reading Guide</b>	<b>1</b>
<b>1 List of Abbreviations</b>	<b>2</b>
<b>2 Introduction</b>	<b>3</b>
2.0.1 Related Work . . . . .	3
2.0.2 Problem Statement . . . . .	3
2.0.3 Hypothesis . . . . .	4
<b>3 Materials and methods</b>	<b>5</b>
<b>4 Leader-followers</b>	<b>6</b>
<b>5 Implementation</b>	<b>7</b>
5.1 CAN implementation . . . . .	7
5.1.1 Introduction . . . . .	7
5.1.2 CAN Protocol description . . . . .	7
5.1.3 Registering a node in AQ . . . . .	11
5.2 Vision based localization . . . . .	11
5.3 Hardware . . . . .	13
5.3.1 Introduction . . . . .	13
5.3.2 Block schmeatic . . . . .	13
<b>6 Test Descriptions</b>	<b>17</b>
<b>7 Results</b>	<b>18</b>
<b>8 Discussion</b>	<b>19</b>
<b>9 Conclusion</b>	<b>20</b>
<b>10 Future work</b>	<b>21</b>
<b>Appendices</b>	<b>24</b>

---

## Reading Guide

---

# CHAPTER 1

---

## List of Abbreviations

---

AQ      AutoQuad



Drones are more and more used in different applications in different areas because they make it relatively easy to get a quick or more in depth overview of a situation. A less positive thing of the drones is the amount of energy they are capable of carrying. A drone designed with long time-flight flying in mind is capable of flying approximately 20 minutes depending on weather and payload. If the drone is equipped with a heavy camera or other kind of payload, then the flight time starts to decrease rapidly. So far the solution has been to increase the size of the drones to mount bigger batteries, but this might not be right way of doing it. Drones become less efficient, less responsive and gets more dangerous due to increase in weight.

By looking at the nature, one can easily see how small animals like ants and birds manage to cooperate and thereby build or move bigger things that they would not be able to do on their own. This way of small independent, decentralized units working together is called a swarm.

By making drones smaller, they get more efficient, their flight time increase and they get cheaper but of the cost of their ability to lift. Therefore it seems like an idea to make small drones cooperate to solve more complex tasks.

SDU is currently using a platform called AutoQuad which is supported by large and small drones. Solving a task as a swarm is complex, and is not in the scope of this project. This project intend to implement a Leader-follower principle inspired by birds flocking behaviour. The leader-drone will have a preprogrammed flight path and the follower-drones will have no knowledge about the flightpath. Each follow-drone will try to keep a distance of 50 cm within plus minus 10 cm to its neighbours and the leader-drone. A computer program will be written to control each drone and tell them where to go without colliding. This will be developed in an indoor controlled environment. Since GPS is unavailable indoor, this project will be using vision, e.g. Henrik Midtiby's MarkerLocator to get the location of each drone. When the Follow-leader has been implemented it should in theory work outside as well, though with larger distances due to GPS inaccuracy.

### 2.0.1 Related Work

### 2.0.2 Problem Statement

The current AutoQuad does not support vision as source of 2D position which is required for the indoor Leader-follower to work. The relative height of the drone is measured using the build-in barometer in each drone providing the third dimension to the drones position. In case the barometer turns out to be too inaccurate due to drift other sensors might be used e.g ultrasound. The computer has to send waypoints wirelessly to all of the drones. A PCB for

each drone has to be developed for the drones to carry as payload. The PCB will be responsible for receiving messages from the computer and translate them into the CAN-bus of the drone. Hypothesis If each drone's 2D position is obtained using vision and spoofed into the drone using CAN, then it is possible for at least 3 drones to follow a leader drone with a preprogrammed flight path and keep a euclidean distance at 50 cm within plus minus 10 cm to the leader and its neighbours.

### **2.0.3 Hypothesis**

If each drone's 2D position is obtained using vision and spoofed into the drone using CAN, then it is possible for at least 3 drones to follow a leader drone with a preprogrammed flight path and keep a euclidean distance at 50 cm within plus minus 10 cm to the leader and its neighbours.

## CHAPTER 3

---

### Materials and methods

---

## CHAPTER 4

---

Leader-followers

---

---

## Implementation

---

This chapter concerns the most important parts about how this project has been implemented. It has been split into several sections.

Mathias: Implementation: Write shortly about the implementation Chapter

Mathias: Implementation: Less calculations on the drone, better to move to another computer/cluster with more power than the drone has available from its battery

Mathias: Implementation: Image of camera and drone seen from the side. Show what happens to the drones position estimation when it drifts down/up

## 5.1 CAN implementation

### 5.1.1 Introduction

In order to spoof the onboard GPS, the CAN-bus was chosen as input to AQ. The CAN-bus is already implemented and widely used on a ViaCopter drone to communicate between AQ and hardware like ESCs, PDB etc. Much time was spend reading through the source code and trying to figure out how the protocol works. The developers behind AQ says, that the code is the documentation and thereby have not written any real documentation.

Figuring out how it works was done using debugging utilities such as breakpoints and looking at the content of the different memory locations in CrossWorks. To further investigate the protocol a PEAK-CAN adapter were connected to a Ladybird drone and several python scripts were developed to send and receive messages from AQ.

The author did not go into details about messages used between AQ ↔ ESC's and AQ ↔ OSD.

### 5.1.2 CAN Protocol description

A Peak-CAN adapter were used throughout the project. It supports High-speed ISO 11898-2<sup>1</sup> which is a standard that states the properties of physical layer. Its max speed is 1 mbit which is the speed AQ uses to communicate on the CAN-bus. AQ uses CAN 2.0B which has 29 identifier bits. AQ is not using an existing protocol on top of ISO 11898-2. The developers created their own to suit their needs.

---

<sup>1</sup><http://www.peak-system.com/PCAN-USB.199.0.html?&L=1>

### Identifier bits

A Generic look at a AQ CAN messages can be seen in table 5.1. The normal function of the identifier bits is the priority of the messages. A CAN controller can then be setup to only allow certain messages to be processed depending on their identifier bits. The identification bits has been split up in AQ to contain information about the sender, receiver etc. Which is not normally saved information in a CAN message.

CAN Message							
Identifier bits [29 bits]							Data bits [max 64 bits]
LCC [28:27]	TT [26]	FID [25:22]	DOC [21:16]	SOID [15:11]	TID [10:16]	SEID [5:0]	

**Table 5.1** Table shows the identifier bits used in AutoQuad CAN messages

In figure 5.2 the abbreviations can be seen.

LCC	Logical Communications Channe
TT	Target Type
FID	function ID
DOC	Data Object Code
SOID	Source ID
TID	Target ID
SEID	Sequence ID

**Table 5.2** Table shows abbreviations used in table 5.1

Each of the elements in an AQ messages will be explained how they are used in AQ.

### Logic Communication Channel

LCC is the priority of the message. To understand how LCC works, one needs to look into CAN arbitration. As stated in ISO-11898-2, a 0 is the dominant bit and a 1 is the recessive bit. The example in figure 5.1 shows two nodes each transmitting a packet. The arbitration only happens during the transmission of the identifier bits. In the example on bit 8, Node 16 losses the arbitration and stops transmitting. Node 15 keeps transmitting its packet because it has lower identifier bits and thereby higher priority.

	Start Bit	ID Bits											The Rest of the Frame
		10	9	8	7	6	5	4	3	2	1	0	
<b>Node 15</b>	0	0	0	0	0	0	0	0	1	1	1	1	
<b>Node 16</b>	0	0	0	0	0	0	0	1	Stopped Transmitting				
<b>CAN Data</b>	0	0	0	0	0	0	0	0	1	1	1	1	

**Figure 5.1** Example of CAN arbitration where node 15 has the lowest ID and thereby highest priority

LLC in a message can take one of the defines in code 5.1

---

**Listing 5.1** LLC defines
 

---

```

1  #define CAN_LCC_EXCEPTION ((uint32_t)0x0<<30)
2  #define CAN_LCC_HIGH      ((uint32_t)0x1<<30)
3  #define CAN_LCC_NORMAL    ((uint32_t)0x2<<30)
4  #define CAN_LCC_INFO      ((uint32_t)0x3<<30)

```

---

**Table 5.3** Table showing the 4 types of priority in AQ

Name	Value	Priority (lowest first)
EXCEPTION	0000	0
HIGH	0001	1
NORMAL	0010	2
INFO	0011	3

## Target Type

Target type can either be “node” or “group” depending on if the receiver(s) is one or more nodes.

---

**Listing 5.2** Target type defined in AQ
 

---

```

1  #define CAN_TT_GROUP      ((uint32_t)0x0<<29)
2  #define CAN_TT_NODE       ((uint32_t)0x1<<29)

```

---

The GROUP is used when AQ sends its reset-msg upon startup.  
When the authors node send a sensor-measure to AQ it will be of type NODE.

## Function ID

Function ID describes the function of the CAN message. If it is a PING, ACK, NACK, etc. It simply states the function of packet so the receiver node knows what to do with the message. Different types of functions can be seen in code 5.3

---

**Listing 5.3** Excerpts from AQ’s list of function defines
 

---

```

1  #define CAN_FID_RESET_BUS ((uint32_t)0x0<<25)
2  #define CAN_FID_ACK       ((uint32_t)0x1<<25)
3  #define CAN_FID_REQ_ADDR  ((uint32_t)0x7<<25)
4  #define CAN_FID_GRANT_ADDR ((uint32_t)0x8<<25)

```

---

Table 5.4 describes the FIDs shown in code 5.3.

**Table 5.4** *Descriptions of the FIDs mentioned in code 5.3*

FID	Description
CAN_FID_RESET_BUS	Message sent by AQ when powered up
CAN_FID_ACK	Message sent to AQ when acknowledging a received message
CAN_FID_REQ_ADDR	Message used when a node on the bus tries to register itself as a node in AQ
CAN_FID_GRANT_ADDR	Message sent by AQ when it registers a node on the bus.

## Data Object Code

Commenting.. Kind of parameter to FID

Mathias: Data Object Code: eksempel på hvordan de bliver brugt i koden - vise function id i switch/case

Mathias: Data Object Code: Describe how the node is created on the BUS

## Source/Target/Network ID

When referred to source/target ID but without respect to either sender or receiver but just a CAN-node, then it is referred to as NetworkId.

## Sequence ID

The sequence id is incremented on transmission of each message. It is used when eg. A CAN-node sends a reply to a get-message, it is then including the sequence id of the get-message so AQ knows what it receives a reply for.

## Data bits

The data bytes does not have a general definition, it depends on the function id.


When FID is CAN\_FID\_REQ\_ADDR, data has the following information in data byte[] and [] respectively.

- Uuid
- Can type





- About the MarkerLocator(out of scope), how it works,(Overview - not in depth, why it's slow, how window-mode works) how it's implemented, scalability.
- Quality measure, why is it nessecary.
- How I arrived to a good way of meassureing the found marker.
- One drone detection
- Two drones detection, different ways of detecting orders.
- Implementation in ROS, splitting into different nodes. optimization

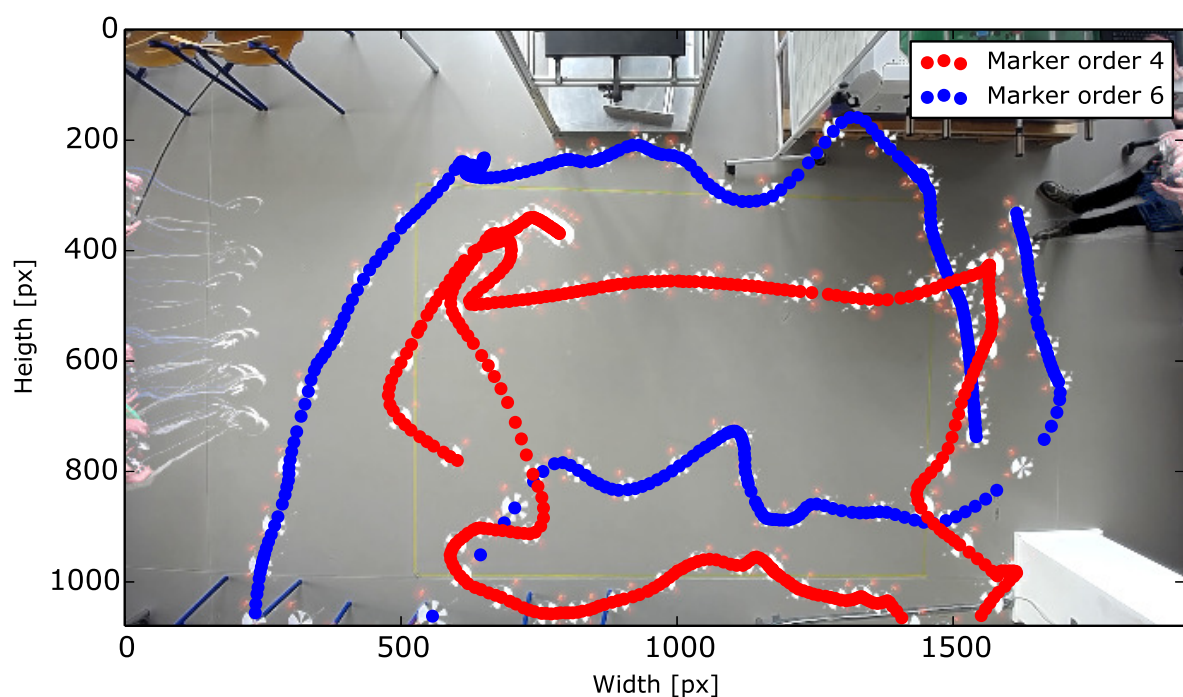

**Figure 5.3** Figure showing every 7<sup>th</sup> frame merged into one frame combined with the tracked positions of the drones

Mathias: Vision based localization: Smaller dot size - almost impossible to see the drone in the frames..

Mathias: Vision based localization: Red is above blue, not because the drone wasn't detected

Mathias: Vision based localization: Wifi test distance, see what happens to latency

## 5.3 Hardware


### 5.3.1 Introduction

This section will go in depth about the extension board created as an add-on to the AQ M4 board. The extension board was developed to act as a bridge between the PC and the CAN-bus using wireless communication.

The block schematic shown in figure 5.4 was created by the author of the report. It was then given to Carsten Albertsen who created the schematic and did the rest of the creation of the PCB.

### 5.3.2 Block schematic

Mathias: Block schematic:	Create schematic appendix
Mathias: Block schematic:	Add GPS, WIFI, PCB, PC to forkortelses liste
Mathias: Block schematic:	Thanks to Carsten Albertsen for PCB development

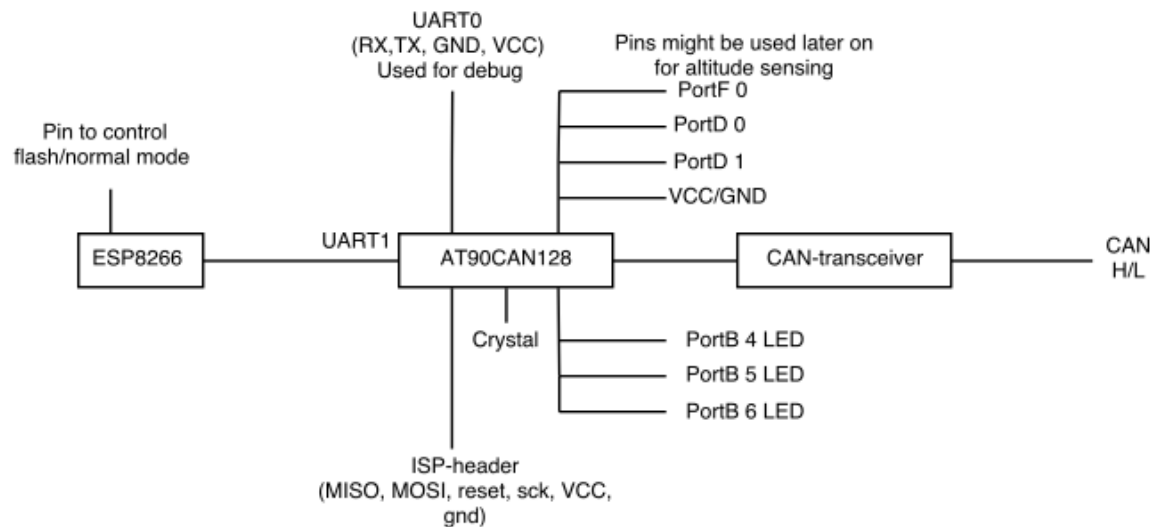

**Figure 5.4** Block schematic of the WIFI-extensionboard developed to AQ M4

### ATmega

#### Wireless Communication

An important part of the hardware is the wireless communication used between the PC and the drones. The wireless communication module has several requirements it needs to fulfill in order to make the whole system work as expected. A comparison table has been made in table 5.5 to find the wireless communication module that is best suited for the task.

The following wireless modules were considered and compared.

- ESP8266

ESP8266 is a general purpose 32 bit SOC with integrated WIFI 802.11 b/g/n support and builtin TCP/IP stack. It can be setup its own access point or it can connect to an existing wireless network. It runs at 80MHz and can be flashed with a custom firmware. The SOC is sold as modules with different pinouts and features such as extra flash memory <sup>2</sup> and different antennas. The chip has been on the market for about two years and costs approximately 7\$. It has been widely used in DIY-projects due to its low price and because it requires a minimum of network knowledge to get up and running.<sup>3</sup> When the SOC is shipped, it comes with a preloaded firmware which either accepts AT commands or LUA scripting depending on the version of the module. These simple programming interfaces makes it quick and easy to interface the cheap. This leads to a large community where most of the problems have been found and solved already. Arduino has been ported to ESP8266 which makes it even easier to get it up and running. Their official Arduino GitHub has 2125 commits on their master branch at the time of writing<sup>4</sup>

- **EMW3165**

EMW3165 is a SOC much like the ESP8266 supporting 802.11 b/g/n WIFI with builtin TCP/IP stack. As with ESP8266 it supports setting up an access point as well as connecting to an existing network. It has a Cortex-M4  $\mu$ C which runs at 100MHz. It supports custom firmware and can be as well be bought as different modules with different pinouts and antennas. It differentiates itself from the ESP8266 by its higher frequency its 5 volts compatible pins <sup>5</sup> which makes it easier to connect other hardware which run 5 volt without the need of a logic level shifter. It has been on the market for only one year and costs approximately 9\$. Since it is a newer board than ESP8266 it has not been used in the same number of applications and thereby has a smaller community behind<sup>6</sup>. Their most active GitHub has 147 commits on their master branch at the time of writing<sup>7</sup>.

- **nRF51822**

nRF51822 is also a SOC, but it is using Bluetooth instead of WIFI. The nRF51822  $\mu$ C is implementing BLE which is a power efficient way of sending and receiving data. The chip supports broadcasting which could be used in this project. The  $\mu$ C can be bought as a standalone component or mounted on modules as the two other  $\mu$ Cs. Different modules offers different types of antenna connectors or builtin antenna on the PCB. It has not been possible to find an Arduino ported firmware that supports this  $\mu$ C. To write a firmware for the  $\mu$ C it has to be done using Nordic Semiconductor's proprietary SDK.

- **XBee**

XBee is a module that implements the Zbee standard. The Xbee modules work as a wireless serial connection. The Xbee modules supports mesh networking which means the modules by themselves figure out which module is closest and makes the connection. This idea makes sense in this application since there will be multiple drones and one computer. If one drone gets too far from the PC, it can just connect to one of the other drones closer to the PC.

<sup>2</sup><https://www.olimex.com/Products/IoT/MOD-WIFI-ESP8266/open-source-hardware>

<sup>3</sup><http://www.esp8266.com/> - 43.000 posts in forum.

<sup>4</sup><https://github.com/esp8266/Arduino>

<sup>5</sup><https://hackaday.com/files.wordpress.com/2015/07/emw3165.pdf>

<sup>6</sup><http://www.emw3165.com/> - 200 posts in forum

<sup>7</sup><https://github.com/SmartArduino/WiFiMCU>

The Xbee solution is ready to use and requires a minimum of programming to get up and running. The modules also support GPIO for digital in and output and analog input.

Mathias: Wireless Communication: footmotemark til at referere til samme fodnote flere gange

Product	Size	Weight	Price	Documentation	Range	Score
ESP8266	24x16mm <sup>8</sup>	{7}	1.5g <sup>9</sup> {8}	7.5\$ <sup>10</sup>	{9}	
EMW3165	32x16mm <sup>11</sup>	{6}	5g <sup>12</sup> {2}	9\$ <sup>13</sup>	{3}	
nRF51822	18x10mm <sup>14</sup>	{8}	3g <sup>15</sup> {0}	7.5\$	{2}	30 Meters <sup>16</sup> {9}
XBee	24.38x27.61mm <sup>17</sup>	{3}	3g <sup>18</sup> {4}	25\$ <sup>19</sup>	{9}	91 Meters <sup>20</sup> {9}

**Table 5.5** Comparison table used to compare different wireless communication modules

Mathias: Wireless Communication: vægt på ESP til 3 gram med link - det er hvad der er oplyst. Efterfølgende skrive at det er vejet til 1.51 gram(hen mod slutningen)

The products compared in 5.5 are chosen to have approximately same specs. Onboard antenna, breakout for easy pin access.

## Pins

A few pins where made available through solder pads for easy access if needed later on.

The following pins where available as solder pads:

- PortF 0 - Alternative function as ADC, channel 0
- PortD 0 - Alternative function as interrupt, INT0
- PortD 1 - Alternative function as interrupt, INT1

In case the onboard barometer isn't accurate enough, an alternative distance could be used to measure the drones altitude with respect to the ground. PortF0 has been made available since some distance sensors give output as an analogue value. An example of such sensor is an Infrared proximity sensor.<sup>21</sup>

As an alternative type of distance sensor, a ultrasonic could be used such as HCSR04. As output it gives a binary output with high-time proportional with the distance.<sup>22</sup>. To detect the high-time, one of PortD1/0 would be useful.

Which type of sensor suits best as a distance sensor to provide altitude information to the drone is out of the scope of this report. The PCB has just been made ready to different types of sensors.

## Debug/ISP

In the final schematic UART0 and ISP pins where combined in one pinheader for easy access through one cable.

Mathias: Debug/ISP: Refer to image of board

<sup>21</sup>[http://www.sharpsma.com/webfm\\_send/1208](http://www.sharpsma.com/webfm_send/1208)

<sup>22</sup><http://www.micropik.com/PDF/HCSR04.pdf>

To program the AtMega the ISP pins where required to be easy accessable. UART0 was made accessable to be used as debug and programming of the ESP8266 board. The plan was to setup the AtMega as UART passthrough from UART0 to UART1. Due to a mistake<sup>23</sup> in the final schematic, both UART0 and UART1 where made accessable trough the ISP/debug header. This ended up making it easier to program the ESP8266-board without using the AtMega as UART passthrough.

---

<sup>23</sup>The wrong pair of MISO/MOSI pins where made available in the ISP-header. The correct pair of MISO/MOSI is also RXD0/TXD0 as alternative function

## CHAPTER 6

---

Test Descriptions

---

Mathias: Test Descriptions: Maybe a chapter called "Test Descriptions here"

## CHAPTER 7

---

Results

---



## CHAPTER 8

---

Discussion

---

## CHAPTER 9

---

Conclusion

---

## CHAPTER 10

---

Future work

---

---

## List of Figures

---

5.1	Example of CAN arbitration where node 15 has the lowest ID and thereby highest priority . . . . .	8
5.2	Test of python CAN test . . . . .	11
5.3	Figure showing every 7'th frame merged into one frame combined with the tracked positions of the drones . . . . .	12
5.4	Block schematic of the WIFI-extentionboard developed to AQ M4 . . . . .	13
10.1	Block schematic of the connected components . . . . .	25
10.2	Test-setup shown . . . . .	26
10.3	Comment . . . . .	26
10.4	Test coordinates plotted . . . . .	27
10.5	QgroundStations plot of AQ's belief in where the drone is . . . . .	27
10.6	The EduQuad drone with the hardware used in the test . . . . .	29
10.7	Plot of h/vDOP from logs when the drone was airborne . . . . .	30

---

## List of Tables

---

5.1	Table shows the identifier bits used in AutoQuad CAN messages . . . . .	8
5.2	Table shows abbreviations used in table 5.1 . . . . .	8
5.3	Table showing the 4 types of priority in AQ . . . . .	9
5.4	Descriptions of the FIDs mentioned in code 5.3 . . . . .	10
5.5	Comparison table used to compare different wireless communication modules . . .	15

# Appendices

## 10.1 Test of spoofed GNSS

Testing of the spoofed GNS was split into two subtests.

The first test was conducted in order to validate the GPS spoofing using the CAN-bus works when the drone is laying on a table.

Test 1 can be seen in 10.1.1.

The second test was conducted as the first test, but when the drone is airborne.

Test 2 can be seen in 10.1.2

Figure Y shows the waypoint list uploaded to the drone. It is expected that the drone will behave as if it was using its onboard GPS. The GPS positions will be gathered in a rosbag to be used later on in test2. A flight with the onboard GPS will be done in order to have a reference flight.

**Testx** Test two will be conducted much the same way as test1. However the GPS will be replaced with a lightweight RTK GPS. The RTK GPS positions will also be saved in a rosbag for later analyse. Is is expected that when using the RTK GPS the drone is closer to its waypoints shown in figure Y, than when using a normal GPS.

### 10.1.1 Test of spoofed positions indoore

**Introduction** The purpose of this test was to see if the GPS coordinates was spoofed correctly and read probably by AQ and to validate the ROS node responsible for creating CAN messages was working as long as the drone is laying on a table. If this works, it shows that the UKF works with the spoofed coordinates as expected, and that the author of the report can spoof the GPS position from a vision based localization system.

A rosbag was used to collect data from the GPS since it publishes data to a topic when played as a node did when the recording took place. This results in no code has to be written and when the code works with a rosbag it also works when it is replaced with a node providing real-world data.


#### Test



**Figure 10.1** Block schematic of the connected components

Figure10.1 shows the connected componenets.

To get the NMEA strings from the GPS, an already existing Frobomind component will be used. It reads from a serial port, and publishes the parsed NMEA string to `/fmData/nmea_from_gps`. Rosbag was then used to save the messages. The code written by the author will then subscribe to `/fmData/nmea_from_gps` and publish the CAN-messages to another topic. A third node which is also a part of Frobomind will then subscribe and send the CAN-messages.

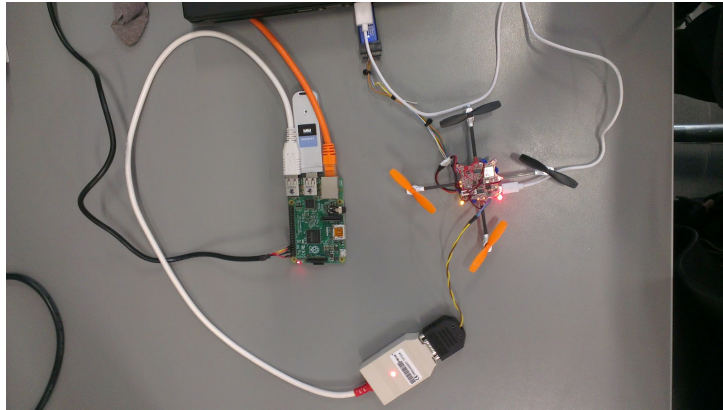


**Figure 10.2** *Test-setup shown*

The Rpi is connected directly to the PC using the orange ethernet cable. The rosbag was stored and played on the PC, so the ethernet cable were used to share rostotics between the PI and the PC. The roscore were running on the PC.

The Ladybird drone is connected to the RPI using a PEAK CAN-adapter to transfer CAN messages. The Ladybird is powered by the white USB-cable and to show the position of the drone in QgroundStation. The PC is connected to the drone using ST-Link SWD to easier start, stop and restart the drones firmware during the test. To access a TTY on the PI, an FTDI cable has been connected to the PC.

In order to obtain GPS-testdata to spoof into AQ, a rosbag was used to record data collected by the GPS mounted on the authors laptop. The setup can be seen in figure 10.3

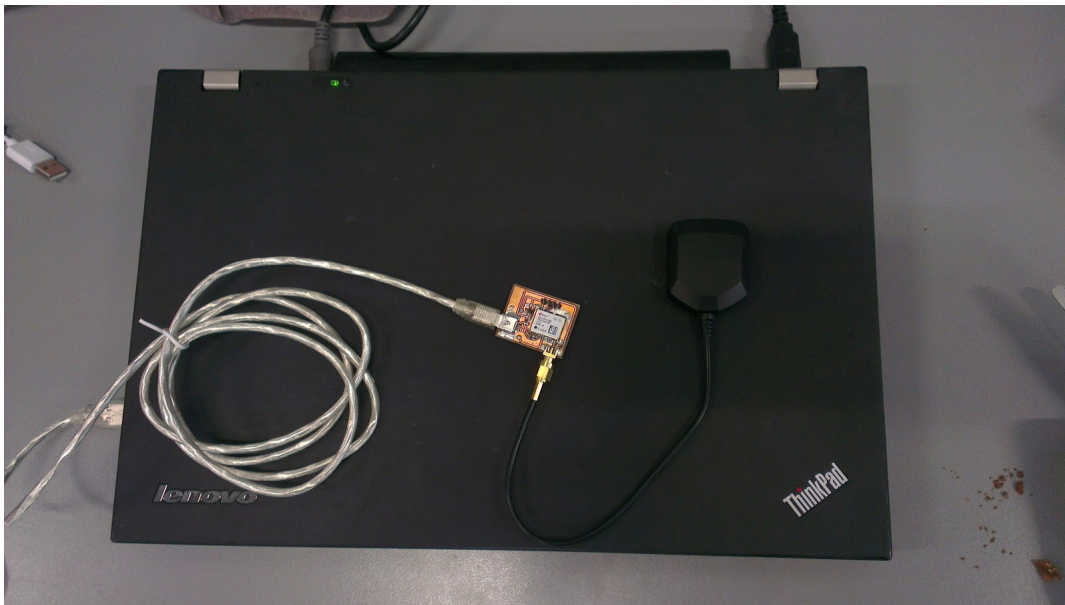


**Figure 10.3** *The Neob-P GPS (PCB developed by SDU), u-blox active GPS antenna <sup>1</sup> and authors laptop used in this test*

The coordinates recorded by the rosbag is shown in figure 10.4. FreeNMEA<sup>2</sup> was used to plot the GPGGA messages obtained from the GPS.


<sup>2</sup><http://freenmea.net/>



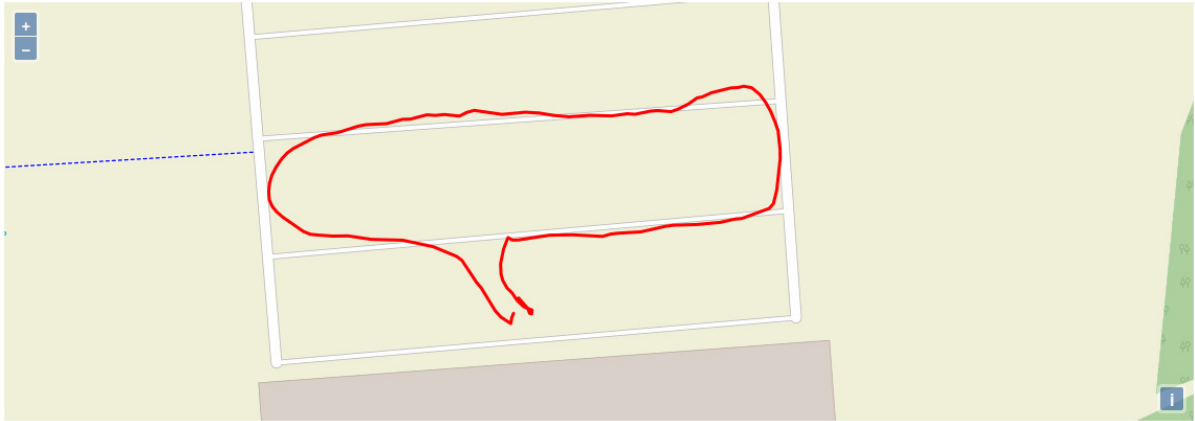

**Figure 10.4** *Test coordinates plotted*

The rosbag containing the GPS coordinates were played on the Rpi, to see if the ROS node responsible for converting GPGGA messages into CAN messages were working. QgroundStation plots AQ's belief in where the drone is. The plot can be seen in figure 10.5

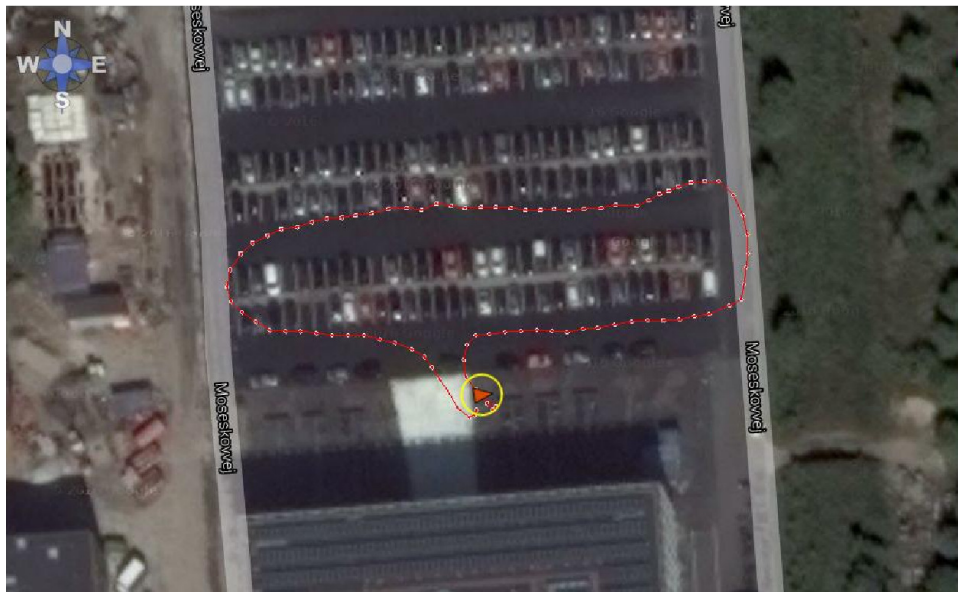

**Figure 10.5** *QgroundStations plot of AQ's belief in where the drone is*

**Conclusion** This test visually confirms that the coordinates is spoofed correctly and read probably by AQ as long as the drone is laying on a table. Passing this test means there is reason to believe that it also works when the drone is airborne.

### 10.1.2 Test of spoofed positions outdoor

**Introduction** The purpose of this test was to see if the GPS spoofing worked when the drone was airborne. The same hardware and software were used as in section 10.1.1, though with a few changes.

The GPS used in test 1 to collect coordinates were mounted on the EduQuad.

The idea was to pass-through the GPS coordinates from the Neo 6-P GPS to AQ. If the CAN spoofing works as expected the drone should behave normally when flying in position-hold

mode.

### Test

Figure 10.6 shows how the hardware were mounted on the EduQuad. It was temporary mounted with strips and tape to avoid short circuiting.

Mathias: Test of spoofed positions outdoor:    Opdater billede med test-equipment

In test 1 the altitude of the drone was hardcoded since it had no relevance in the test. Though in test 2 it was necessary since the UKF<sup>3</sup> uses the altitude from the GPS to estimate the position of the drone. Furthermore the following check were inserted to make sure only valid GPS coordinates were fed into the AQ:

---

#### Listing 10.1 Quality checks added to discard bad positions

---


```

1  // default low accuracy
2  gpsData.hAcc = 5; // Meters
3  gpsData.vAcc = 5; // Meters
4
5  if(gpsData.fix == 1){ // Single point solution
6      if(gpsData.hdop < 3){
7          if(gpsData.satellites >= 5){
8              AQ_PRINTF("Recv. Valid GPGLA\n",0);
9              // High accuracy
10             gpsData.hAcc = 2.5; // Meters
11             gpsData.vAcc = 2.5; // Meters
12             // Set flag to process new message
13             CoSetFlag(gpsData.gpsPosFromCanFlag);
14             } else {
15                 AQ_PRINTF("Satellites: %f \n", gpsData.satellites);
16             }
17         } else {
18             AQ_PRINTF("HDOP: %f\n", gpsData.hdop);
19         }
20     } else {
21         AQ_PRINTF("Fix: %f\n", gpsData.fix);
22     }

```

---

<sup>3</sup><https://github.com/bn999/autoquad/blob/master/onboard/run.c#L111>

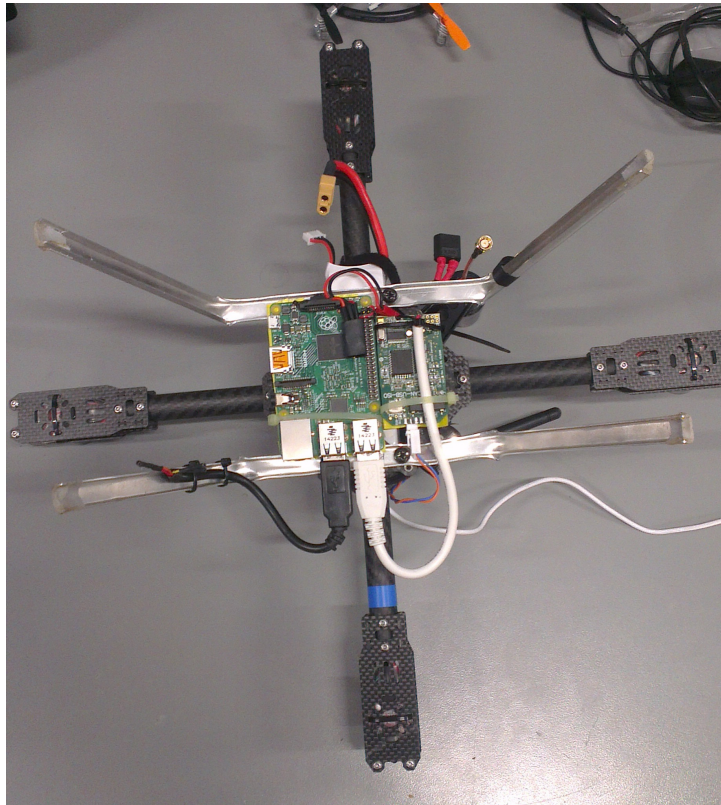

**Figure 10.6** *The EduQuad drone with the hardware used in the test*

An extra battery was mounted on the drone to supply the Rpi. The ROS nodes running on the Rpi had to be start up before AQ starts registering notes on the CAN-bus. If the nodes was not started up, they would not reply to AQs reset-msg it sends when it is booting.

When the ROS-node were connected to the CAN bus, it showed that the ROS-node needed extra checking on CAN messages in order to detect difference between messages targeted the ROS-node and messages targeted the ESC32-nodes.

A bug in the `can_socketcan` -node used to communicate with the Peak-Can adapter where found a fixed. It was later on merged back into Frobomind <sup>4</sup> **Conclusion**

The test did not go as expected. The test was carried out under a time pressure since the author's supervisor only had 30 minutes to carry out the test.


The author did though gain experience when having multiple CAN devices connected to the CAN-bus.

Several things went wrong through the test:

- The onboard GPS was not disabled
- The author accidentally forgot to set the DOP values used in AQ
- No reference flight after the firmware were flashed for the first time.
- The GPS antenna was not mounted in the middle of the frame as the onboard antenna.

<sup>4</sup><https://github.com/FroboLab/frobomind/pull/12>

Figure 10.7 shows the DOP value is lowering witch indicates that AQ was using its onboard GPS.

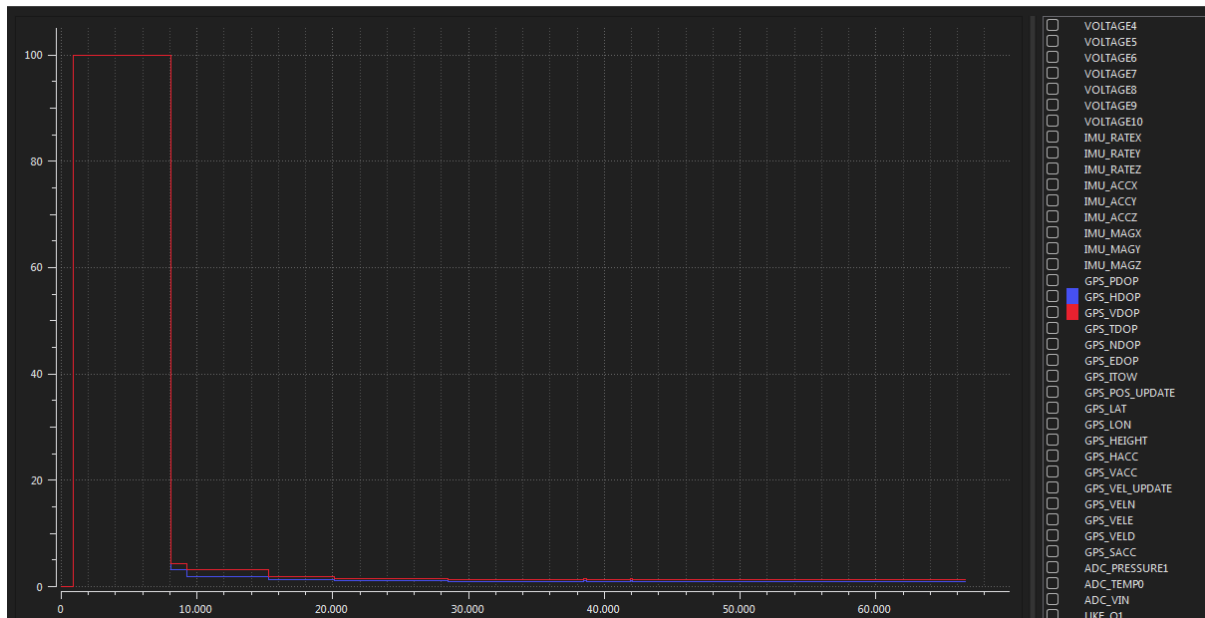

**Figure 10.7** Plot of  $h/vDOP$  from logs when the drone was airborne

The test will be carried out again.