



# General Single-PORT SRAM

## 8192 WORDS X 32 BITS, MUX 16

### SMIC 55nm LL Logic Process

## Version 1.1.a

### DISCLAIMER

SMIC hereby provides the quality information but makes no claims, promises or guarantees about the accuracy, completeness, or adequacy of the information herein. The information contained herein is provided on an "AS IS" basis without any warranty, and SMIC assumes no obligation to provide support of any kind or otherwise maintain the information. SMIC disclaims any representation that the information does not infringe any intellectual property rights or proprietary rights of any third parties. SMIC makes no other warranty, whether express, implied or statutory as to any matter whatsoever, including but not limited to the accuracy or sufficiency of any information or the merchantability and fitness for a particular purpose. Neither SMIC nor any of its representatives shall be liable for any cause of action incurred to connect to this service.

### STATEMENT OF USE AND CONFIDENTIALITY

The following/attached material contains confidential and proprietary information of SMIC. This material is based upon information which SMIC considers reliable, but SMIC neither represents nor warrants that such information is accurate or complete, and it must not be relied upon as such. This information was prepared for informational purposes and is for the use by SMIC's customer only. SMIC reserves the right to make changes in the information at any time without notice. No part of this information may be reproduced, transmitted, transcribed, stored in a retrieval system, or translated into any human or computer language, in any form or by any means, electronic, mechanical, magnetic, optical, chemical, manual, or otherwise, without the prior written consent of SMIC. Any unauthorized use or disclosure of this material is strictly prohibited and may be unlawful. By accepting this material, the receiving party shall be deemed to have acknowledged, accepted, and agreed to be bound by the foregoing limitations and restrictions. Thank you.

## OVERVIEW

The General Single-PORT SRAM(BW) is designed for SMIC's 55nm CMOS Logic process. The memory is optimized for speed, power and area. It operates at a voltage range of 1.08V to 1.32V and a temperature range of -40°C to 125°C.

The write enable (WEN), bit-write enable(BWEN[0:n]),chip enable (CEN), address (A[0:i]) and data in (D[0:n]) signals are latched on the rising-edge of the clock. When CEN is low and WEN is high the memory will be in read operation. Data is read from the location specified by the address A[0:i], and is output on the output port Q[0:n].When CEN and WEN are both low the memory will be in write operation. The word on the data port D[0:n] will be written into the location specified by the address A[0:i] and the data will appear on the output port Q[0:n].When CEN is high the memory is in standby mode. Meanwhile, the data stored in memory is retained but cannot be read or written.

## CONFIGURATION:

PARAMETER	VALUE
Mux	16
Words	8192
Bits	32
Width	569.26um
Height	307.045um
Area	174788.437um <sup>2</sup>

## PIN DEFINITION:

PIN	DIRECTION	DEFINITION
A[12:0]	Input	Address Inputs
D[31:0]	Input	Data Inputs
WEN	Input	Write Enable
BWEN	Input	Bit-Write Enable
CEN	Input	Chip Enable
CLK	Input	Clock Input
Q[31:0]	Output	Data Outputs

## TIMING:

PARAMETER	DESCRIPTION	FF CORNER 1.32V, -40°C		FF CORNER 1.32V, 0°C		FF CORNER 1.32V, 125°C		SS CORNER 1.08V, -40°C		SS CORNER 1.08V, 125°C		TT CORNER 1.2V, 25°C	
		Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max
T <sub>cyc</sub>	Cycle Time	0.565		0.595		0.675		3.046		2.987		1.510	
T <sub>a</sub>	Access Time <sup>1</sup>	0.514		0.541		0.614			2.769		2.715		1.372
T <sub>ah</sub>	Address Hold	0.114		0.114		0.114		0.229		0.147		0.122	
T <sub>as</sub>	Address Setup	0.404		0.404		0.428		0.697		0.681		0.424	
T <sub>bwh</sub>	Bwen Hold	0.193		0.193		0.190		0.348		0.282		0.215	
T <sub>bws</sub>	Bwen Setup	0.300		0.299		0.346		0.464		0.443		0.293	
T <sub>ch</sub>	Cen Hold	0.042		0.039		0.033		0.032		0.000		0.019	
T <sub>cs</sub>	Cen Setup	0.311		0.315		0.326		0.800		0.683		0.398	
T <sub>dh</sub>	Data Hold	0.192		0.192		0.189		0.346		0.280		0.214	
T <sub>ds</sub>	Data Setup	0.289		0.321		0.347		0.781		0.781		0.294	
T <sub>wh</sub>	Wen Hold	0.092		0.088		0.073		0.196		0.086		0.084	
T <sub>ws</sub>	Wen Setup	0.300		0.299		0.348		0.467		0.443		0.295	
T <sub>ckh</sub>	Clock High	0.020		0.020		0.020		0.020		0.020		0.020	
T <sub>ckl</sub>	Clock Low	0.088		0.088		0.099		0.209		0.242		0.132	
T <sub>ckr</sub>	Clock Rise Skew	0.500		0.500		0.500		1.000		1.000		0.600	

Timing simulation conditions:

1. Access time = best case for fast corner and worst case for slow/typical corners


## POWER:(UNITS=uA/Mhz)

PARAMETER	FF CORNER 1.32V, -40°C	FF CORNER 1.32V, 0°C	FF CORNER 1.32V, 125°C	SS CORNER 1.08V, -40°C	SS CORNER 1.08V, 125°C	TT CORNER 1.2V, 25°C
AC Current <sup>2</sup>	14.998	15.104	16.330	16.203	15.778	18.178
Read AC Current	14.240	14.345	15.400	15.397	15.010	17.443
Write AC Current	15.755	15.863	17.259	17.010	16.546	18.913
Standby Power (mW)	0.005067	0.025769	1.639130	0.000193	0.051999	0.005633
Deselect Power (mW) <sup>3</sup>	0.109744	0.114515	0.237071	0.063825	0.069225	0.085150


Power simulation conditions:

2. CEN is low, 50% read / 50% write operations, all addresses and 50% of input pins toggle at 1Mhz
3. CEN is high, 50% of input pins toggle at 1Mhz

**WRITE CYCLE TIMING:**

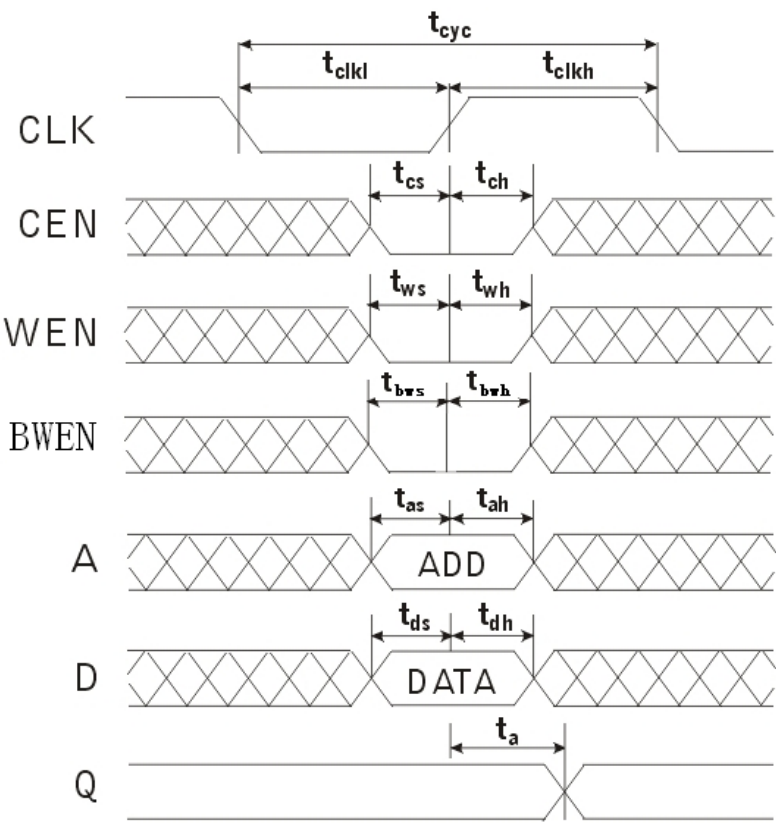

**READ CYCLE TIMING:**

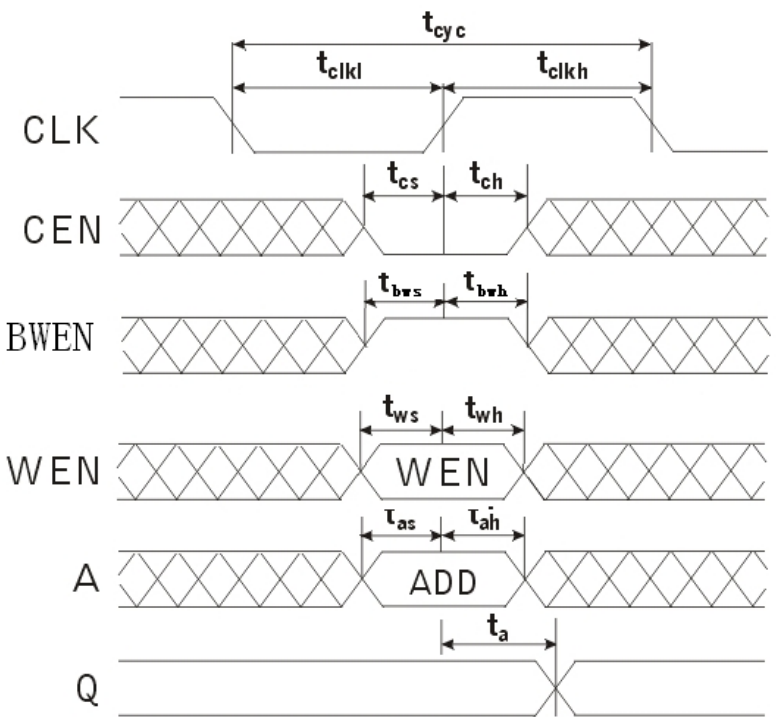

Datasheet Revision History

Date	Version	Changes
	null	

Semiconductor Manufacturing International Corporation

No. 18 Zhangjiang Road  
Pudong New Area  
Shanghai 201203  
The People Republic of China  
URL: [www.smics.com](http://www.smics.com)