


NOT WATERPROOF. SUBMERSIBLE.

The SF16 System.


Silicone linear LED, sealed end to end and rated for permanent immersion — with the connector range and channel system that make a full recessed install possible. One system, specified end to end.

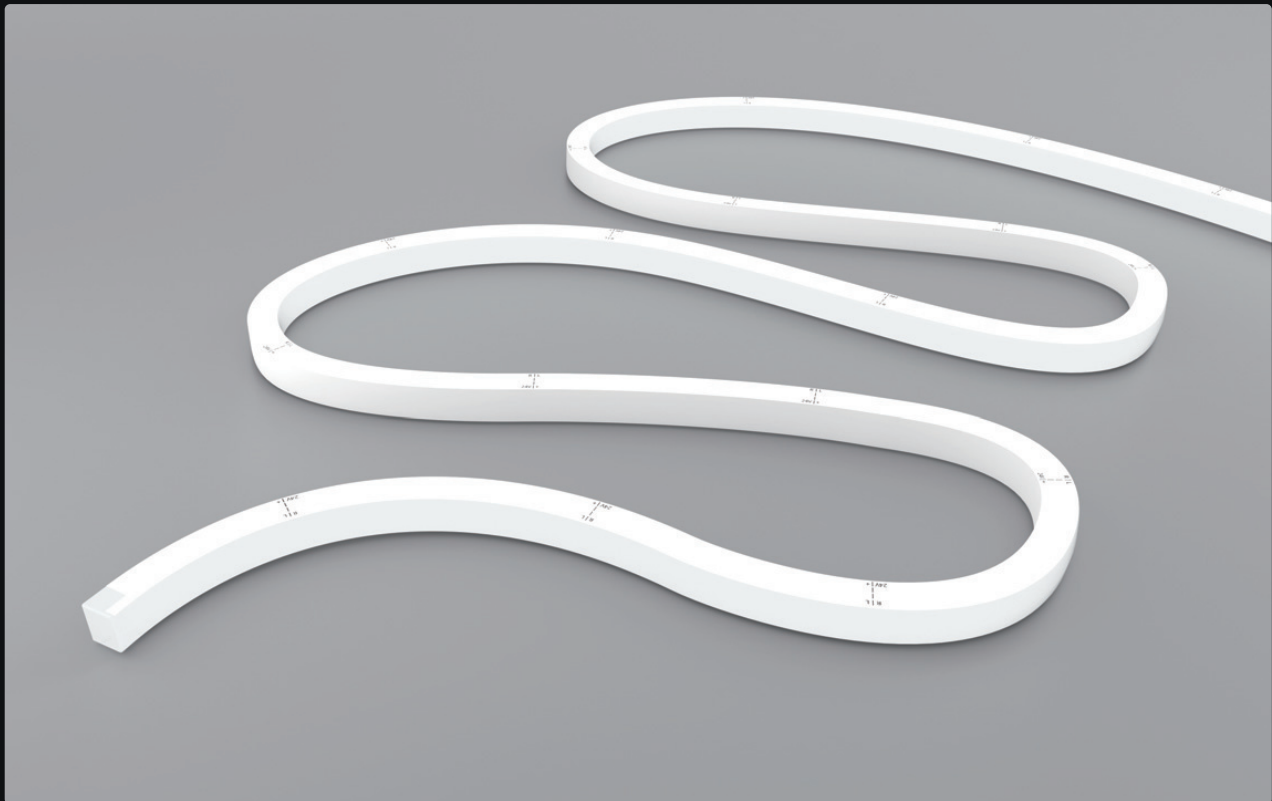

SF16 MONO — OR-SF-16M

16.5mm of sealed silicone.

A solid silicone extrusion with a flat diffusing face — no dotting, no hotspots. The 16.5 × 16.5mm envelope below is the figure your cavity, coping and channel planning works from.

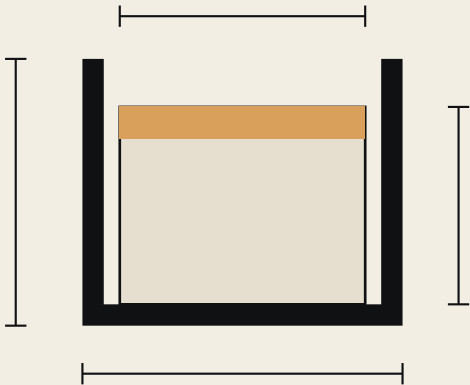

STRIP 16.5 × 16.5MM — CHANNEL OR-AL-CC 20.4 × 19.6MM
SECTION VIEW, TO SCALE. EMITTING FACE UP.

Input voltage	24V DC
Power	10W/m
LED count	144 LEDs/m
Cutting unit	83.3mm (12 LEDs)
CRI	>90
Beam angle	120°
Min bend diameter	120mm
Max run — single feed	10m (CC: 15m)
Max run — double feed	20m (CC: 30m)
Lumen maintenance	L70 70,000h @ 25°C
Operating temp	-40°C to 55°C
CCT options	2200K – 6500K
IP rating	IP68 – submersible


- IP68
- UV RESISTANT
- SALTWATER
- FLAME RES.
- SOLVENT RES.
- LM-80
- ANSI C78.377
- 5YR WARRANTY

Also available in the SF16 family: constant-current mono OR-SF-16CC (15m/30m runs), tunable white OR-SF-16T, RGB OR-SF-16RGB and RGBW OR-SF-16RGBW. Ask for the variant sheet when your job needs colour or longer single feeds.

FACTORY-SEALED, IP68

Which connector do you need?

Every connector is moulded onto the strip at the factory and pressure-tested before dispatch — there is no field termination to get wrong. Pick by where the cable needs to exit.

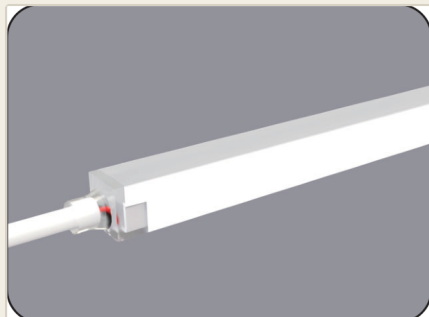


Direct entry

OR-CON-DIR

Cable exits in line with the strip

Straight runs, open ends

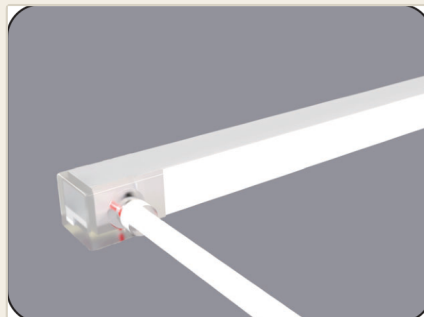

Side entry

OR-CON-SIDE

Cable exits at 90°, level with the strip

Tight end-of-run spaces




Bottom entry

OR-CON-BTM

Cable exits straight down, under the strip

THE RECESSED-INSTALL CONNECTOR

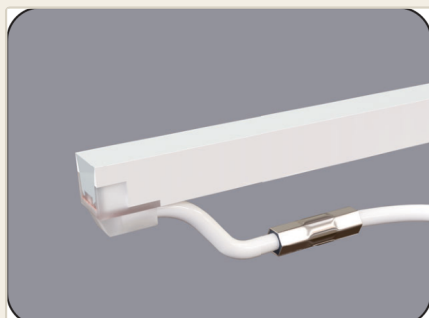


L-shape entry

OR-CON-L

Cable turns 90° within the fitting

Shallow cavities, wall returns

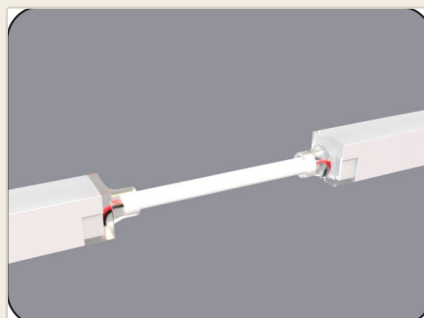


Jumper

OR-CON-JMP

Strip-to-strip bridge, both ends sealed

Genuine mid-run splices only

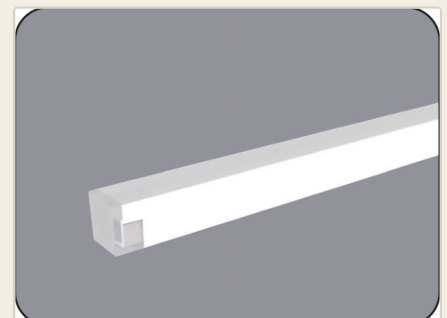

End cap

OR-CAP

Seals the blind end of every run

Factory-fitted, IP68

Bottom entry is the one to know: it drops the cable straight through the base of a recessed channel, so tile-flush and coping installs need no visible cable path at all.


WHERE WE LEAD

A channel for every install context.


A strip-only spec sheet stops being useful the moment the run has to disappear into stone. Match the install context to the channel — every profile below accepts the same SF16 strip.



Surface, straight
OR-AL-CC 20.4 × 19.6mm
Aluminium, rigid

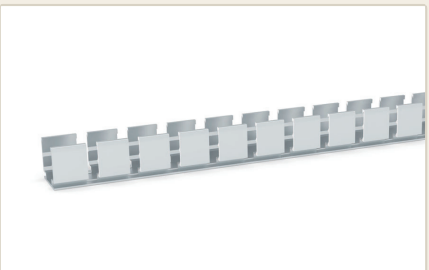

Surface, curved
OR-AL-FLX 20.4 × 19.8mm
Aluminium, flexible segmented

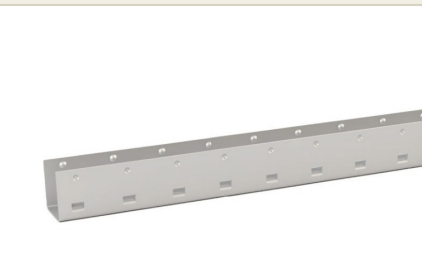

Recessed under pool coping
OR-SS-CC 18.6 × 20.3mm
Stainless 316L, rigid



Recessed, curved coping
OR-SS-FLX 18.0 × 21.8mm
Stainless 316L, flexible



Budget / light duty
OR-PC-CC 23.5 × 22.9mm
Polycarbonate




Buried in ground / deck
ON REQUEST 25.9 × 44.9mm
Aluminium, buried & recessed

Aluminium channel (OR-AL-CC) is the standard specification: rigid, surface-mount or recessed, in 350mm / 1m / 2m lengths. Flexible segmented aluminium follows curves down to the strip's own 120mm bend limit.

A REAL JOB, END TO END

Typical 10 × 20m pool perimeter.

Sixty metres of perimeter, run entirely within SF16 feed limits. Ember runs are double-fed; dark runs are single-fed. Every feed point is a factory-sealed connector — no field joins anywhere on the job.

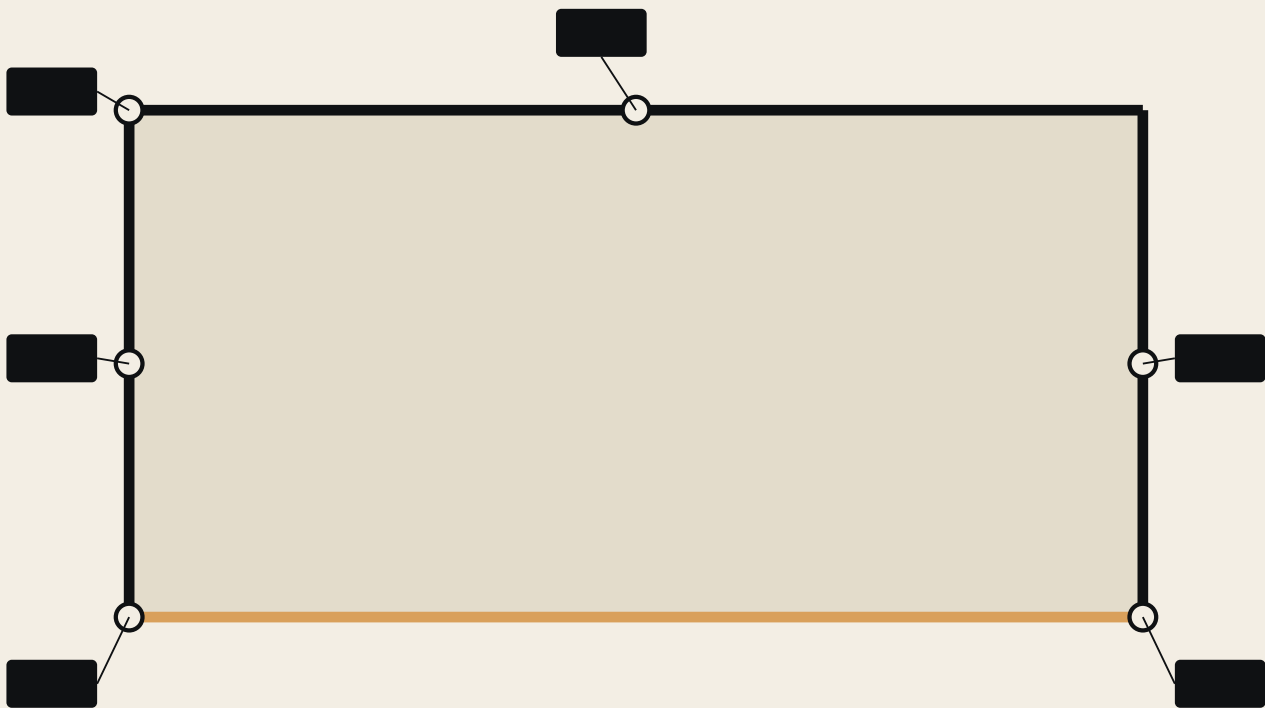

RUN BREAKDOWN

2 × 10m	top side — single feed each
1 × 20m	bottom side — double feed
2 × 10m	ends — single feed each
6	feed points, IP68 factory-sealed
6	24V drivers in dry plant locations


WITH CC MONO

The constant-current strip (OR-SF-16CC) runs 30m on a double feed — the same pool becomes two runs and four feed points, with no mid-run splice on either long side.


SIMPLE BY DESIGN

Driver, strip, dimmer. That's it.

WITH DIMMING

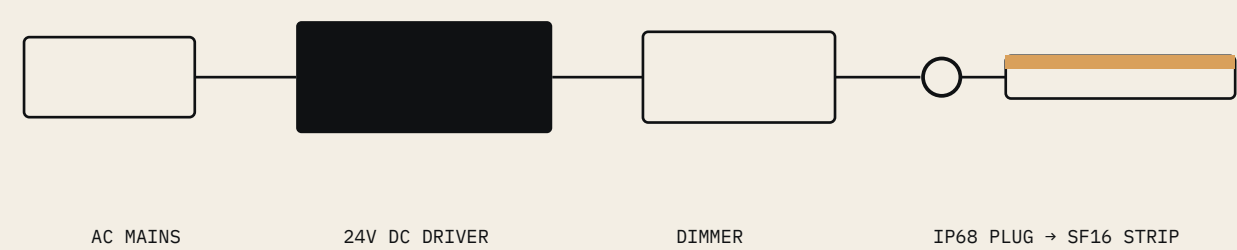

DIRECT 24V DC

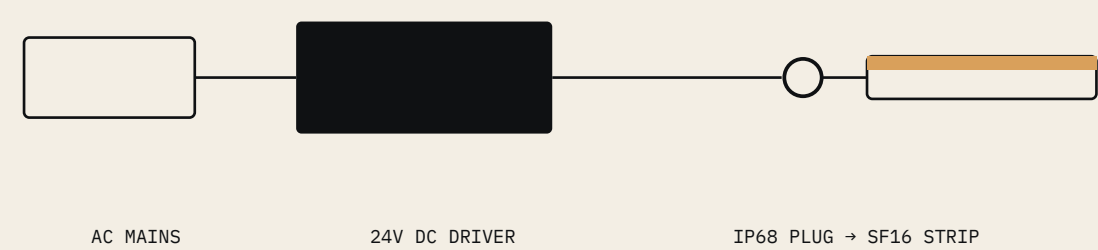

DIMMING COMPATIBILITY

Mono / CC mono	0-10V, DALI, DMX, Triac, PWM
Tunable white	0-10V, DALI, DMX, PWM
RGB / RGBW	DMX or PWM — decoder required

Drivers stay in dry plant locations — only the sealed strip and its factory-moulded connectors go near water.

HOW TO ORDER

Orenara is a supply-only business. Send your run lengths and install context — we return a component-level quote with a firm lead time, confirmed at quote stage.

Installation is arranged by you or your licensed electrician.

hello@orenara.com
orenara.com.au