


5.1 Multiplexed Signals

Table 5-1. PORT Function Multiplexing

VQFN 24-Pin SQIC 20-Pin		Pin Name (1/2)	Other/Special	ADCO	ADC1	PTC(4)	ACO	AC1	AC2	DAC0	USART0	SP0	TMR0	TC0A	TCBn	TC0D	ICL
23	16	PA0	RESET/UPDI	AIN0													LUTB-IN0
24	17	PA1		AIN1							TxD(3)	MOSI	SDA(3)				LUTB-IN1
1	18	PA2	EVOUT0	AIN2							RxD(3)	MISO	SCL(3)				LUTB-IN2
2	19	PA3	EXTCLK	AIN3							XCK(3)	SCK		WC3	TCB1 WO		
3	20	GND															
4	1	VDD															
5	2	PA4		AIN4	AIN0	XDVY0					XDIR(3)	SS		WC4		WOA	LUTB-OUT
6	3	PA5	VREFA	AIN5	AIN1	X1VY1								WO5	TCB0 WO	WOB	
7	4	PA6		AIN6	AIN2	XDVY2	OUT	AIN0	AINP1	AINP0							LUT1-OUT
8	5	PA7		AIN7	AIN3	X3VY3	AINP0	AINP0	AINP0	AINP0							
9		PB7			AIN4			AINP1	AINP3								
10		PB6			AIN5			AINP3		AINP1							
11	6	PB5	CLKOUT	AIN8		X12VY12	AINP1		AINP2					WO2(3)			
12	7	PB4		AIN9		X13VY13	AINP1	AINP3						WO1(3)			LUTB-OUT(3)
13	8	PB3	TOSC1					OUT			RxD			WO0(3)			
14	9	PB2	TOSC2, EVOUT1						OUT		TxD			WO2			
15	10	PB1		AIN10		X4VY4	AINP2				XCK	SDA		WO1			
16	11	PB0		AIN11		X5VY5	AINP2	AINP1			XDIR	SCL		WO0			
17	12	PC0			AIN6	X6VY6						SCK(3)		TCB0 WO(3)	WOC		
18	13	PC1			AIN7	X7VY7						MISO(3)			WOD	LUT1-OUT(3)	
19	14	PC2	EVOUT2		AIN8	X8VY8						MOSI(3)					
20	15	PC3			AIN9	X8VY9						SS(3)		WO3(3)			LUT1-IN0
21		PC4			AIN10	X10VY10								WO4(3)	TCB1 WO(3)		LUT1-IN1
22		PC5			AIN11	X11VY11								WO5(3)			LUT1-IN2

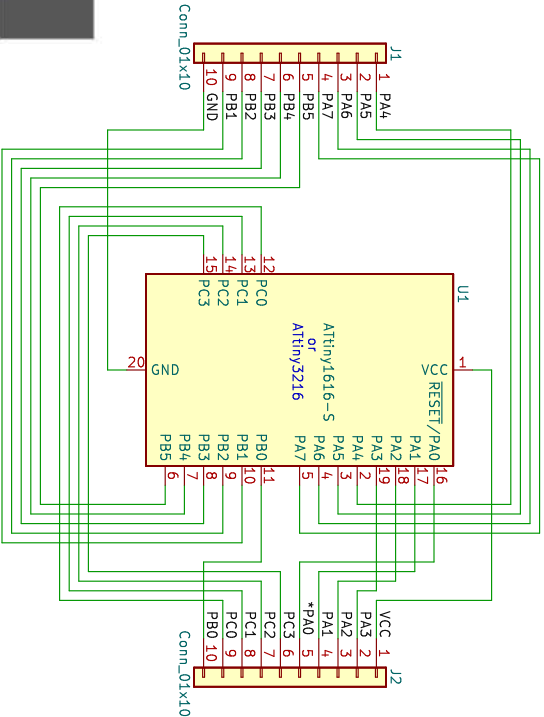

NOTE: Attiny1616 may have fewer special function pins.

Attiny1616 or Attiny3216

Sheet /

File: Attiny20SI0C.kicad_sch

Title: Attiny 20SI0C

Size: USLetter Date: 2024-07-27

Kicad E.D.A. kicad 7.0.10

Rev:

Id: 1/1