INIT: INDOOR HEAT INDEX TRACKER

An IoT-Based Classroom Heat Index Monitoring System

PHYSICAL SCIENCE / INFORMATION TECHNOLOGY

Researchers:

John Michael A. Ompad

Jelhay C. Pangatungan

Mark Jacob G. Butaya

Adviser:

Arvin C. Trangia

Abuno High School

Draft 2026-11-04

Chapter 1
Introduction

I. Rationale of the Study

Classrooms in the Philippines are often hot, and the heat is expected to be stronger in an El Niño year. A study of more than 730,000 students in Cambodia, a neighbouring Southeast Asian country, found that sustained heat exposure significantly reduces examination performance (Tzintzun et al., 2026). That paper is a working paper, that is, research in progress, so its findings are evidence to consider and not a final result. A controlled experiment with 53 undergraduate students at 20 °C and 27 °C, which used Arduino-based temperature and humidity sensors, also found that thermal satisfaction and grade point average together explained 23.15 % of the variance in student grades (Kirkil, 2025). That study was short and done at a university in Türkiye, so it does not show the same effect in a Philippine classroom. Still, these studies support a simple idea: a school should know how hot a room really is.

Air temperature alone does not tell how hot a person feels. The heat index combines temperature and humidity into an "apparent temperature" and is built on Steadman's model of human thermoregulation (Lu & Romps, 2022). For practical use the National Weather Service uses a polynomial fit to that model (Lu & Romps, 2022), although extrapolating such polynomial fits to hotter and more humid air has no basis in physiology, and the original index is undefined for some hot, humid conditions (Lu & Romps, 2022). In the Philippines, PAGASA, the national weather bureau, uses a four-tier, effect-based heat index classification, and it advises that school heads and local governments keep the final say on decisions such as class arrangements (Philippine Atmospheric, Geophysical and Astronomical Services Administration [PAGASA], 2024).

Low-cost sensors and Wi-Fi microcontrollers make room monitoring possible without expensive equipment. An earlier classroom study used a DHT22 temperature and humidity sensor on an ESP8266 or ESP32 board and sent the readings to a cloud database (Widjaja et al., 2022). That work centred on logging temperature and humidity and on modelling a cooling system. This study builds on that idea and adds the heat index with its PAGASA level and a public web page. The product is named "Init" (Tagalog for "heat"): a room monitor and a web app that show temperature, humidity and the heat index of one classroom, and tells at a glance whether the room is in a PAGASA caution, extreme caution, danger or extreme danger level.

The system also has limits that the study states openly. The sensor was not yet compared with a reference thermometer. This matters because another ESP32 and DHT22 monitoring system, tested in a greenhouse against a thermo-hygrometer, had a root mean square error of 1.48

°C for temperature and 3.18 % for humidity (Wardani et al., 2023), which is larger than the manufacturer's stated ±0.5 °C and ±2 %RH. The device needs a Wi-Fi connection (a phone hotspot or pocket router) because the classroom has no Wi-Fi. The power bank used to run the device switches itself off if the device does not draw current regularly, which shaped the design (Decision D-027).

II. Statement of the Problem

This study aims to design, build and test "Init", a low-cost Internet-of-Things (IoT) room monitor and web app that measures the temperature and relative humidity of a classroom, computes the heat index, and shows it to the public in real time with the matching PAGASA level.

Specifically, the study sought to answer the following questions:

1. What hardware and software components are needed to measure, send, store and show the heat index of a classroom, and how are they connected?
2. Does the computed heat index agree with a published reference table of expected values?
3. How reliably does the device send readings over 24 hours when powered by a USB power bank, in terms of (a) the number of readings recorded, (b) the longest gaps between readings and (c) the drop in power bank charge?
4. What were the temperature, relative humidity and heat index in the monitored room over the 24-hour run, and in which PAGASA level did the room spend its time?
5. Does the system show the room as offline when the device stops sending, and how soon?
6. Can the web app be read by any visitor on a phone while only an authorised administrator can change settings?

III. Scope and Limitations

The study covers one device in one room, read-only public viewing, free-tier hosting and a power bank as the only power source (Decision D-003). It does not claim sensor accuracy, because no reference thermometer or hygrometer was available yet, and it does not claim that the measured values apply to other rooms or seasons. The measured data come from a single 24-hour run on a test project of the database. A physical wake button for the screen and over-the-air firmware updates are planned but not yet built. Alerts to phones (push notifications) were built and seen on one Android phone on the test project only.

Chapter 2
Research Methodology

2.1 Research Design

This study used an engineering design and experimental approach. The product was built in small steps (phases). Anything with a known correct answer, such as the heat index calculation, was written test-first: the test was run and seen failing before the code was written. After each step the result was checked on the real device or the running web page, and not only by automated tests. The independent variable of the main experiment was time of day (a 24-hour run); the measured variables were temperature, relative humidity, heat index, the number of readings and the power bank charge.

2.2 Research Environment

The device was run in the researchers' test room with the Wi-Fi provided by a mobile phone hotspot. Data were stored in a cloud database located in Singapore, and the web page was hosted on a free static hosting service. Local time is Philippine time (Asia/Manila, UTC+8). [School and room details to be added by the researchers.]

2.3 Research Instruments and Materials

Table 1. Hardware and software used

Item	Purpose	Notes
ESP32 DevKit, 38-pin, Type-C	Microcontroller with Wi-Fi	Decision D-017; firmware written in the Arduino framework with PlatformIO
DHT22 (AM2302), 4-pin	Temperature and relative humidity sensor	DATA on GPIO 4 with a 4.7 to 10 kΩ pull-up to 3.3 V; read at most once every 2 s
OLED 0.96 in, SSD1306, 128 x 64	Shows the room, readings and status	I2C on GPIO 21 (SDA) and GPIO 22 (SCL), address 0x3C
USB power bank, ROMOSS Sense 8P+, 30 000 mAh	Power	5 V into the board USB-C port; replaced the original battery and converter design (D-008)
Pocket router or phone hotspot	Internet	The classroom has no Wi-Fi (D-004)
Supabase (PostgreSQL)	Database, upload function, sign-in	Free tier; public read, device-only upload
Vercel	Hosting of the web app	Free Hobby plan, non-commercial use only (D-030)
React 19, Vite 8, Tabler	Web app framework and styles	Open-source (MIT); installable as a phone app (PWA)
Node.js test runner, Playwright (Chromium)	Automated tests and page checks	Pixel comparison of the page against approved mock-ups

2.3.1 Hardware Specifications

Table 2 lists the specifications of each hardware part. Values marked "datasheet" are the manufacturer's published figures and were not measured in this study (the sensor accuracy was not compared with a reference thermometer and hygrometer in this study). The other values come from the project's own build and tests.

Table 2. Hardware specifications

Part	Specification	Source
ESP32 DevKit, 38-pin, Type-C (ESP32 chip)	Two Xtensa 32-bit LX6 cores at up to 240 MHz; 520 KB SRAM; 2.4 GHz Wi-Fi 802.11 b/g/n; chip operating voltage 2.3 to 3.6 V (the board regulates the 5 V USB input)	Espressif ESP32 datasheet v5.3
ESP32 firmware size	About 77 % of the program flash and about 19 % of the RAM used by the finished firmware	Build report (project)
DHT22 (AM2302), 4-pin	Supply 3.3 to 5.5 V; temperature -40 to 80 °C, accuracy ±0.5 °C, resolution 0.1 °C; humidity 0 to 100 %RH, accuracy ±2 %RH (maximum ±5 %RH), resolution 0.1 %RH; one-wire digital output	Manufacturer datasheet
DHT22 use in the project	DATA on GPIO 4 with a 4.7 to 10 kΩ pull-up to 3.3 V; read at most once every 2 s (the firmware reads every 5 s)	Project wiring
OLED 0.96 in, SSD1306	128 x 64 pixels, monochrome; I2C, SDA on GPIO 21, SCL on GPIO 22, address 0x3C; 5 x 7 pixel font; always on	Project wiring and design (D-025)
USB power bank, ROMOSS Sense 8P+	30 000 mAh; outputs 5 V 3 A, 9 V 2 A, 12 V 1.5 A; the project uses the 5 V output into the board USB-C port; switches itself off if the board does not draw Wi-Fi-level current about once a minute (upload every 60 s)	Owner's confirmation (D-012) and bench tests (D-027)
Network	Phone hotspot or pocket 4G router (the classroom has no Wi-Fi); credentials saved in the board flash, set from a phone through the Init-Setup page	Project (D-004, D-011)

2.3.2 Technology Stack

Table 3 lists the software the system is built from, by layer, with the exact versions that were pinned so that a rebuild gives the same result. All are free; the web libraries are open source.


Table 3. Technology stack

Layer	Technology (version)	Role
Device firmware	C++ with the Arduino framework on PlatformIO; platform espressif32 6.9.0	Reads the sensor, draws the OLED, queues and uploads readings
Device libraries	Adafruit DHT sensor library 1.4.7; Adafruit Unified Sensor 1.1.15; Adafruit SSD1306 2.5.17; Adafruit GFX 1.13.0; Adafruit BusIO 1.17.4	DHT22 reading and OLED drawing

Layer	Technology (version)	Role
Device security	HTTPS (TLS) with built-in root certificates; a per-device key	Checks the server certificate; proves which device is uploading
Database and API	Supabase: PostgreSQL database with a REST interface and email sign-in; SQL functions for upload, history, school day and admin changes; row-level security	Stores readings and settings; enforces who may read and write
Web app	JavaScript with React 19.3.1, Vite 8.3.5 (@vitejs/plugin-react 6.1.2) and Tabler Core 1.7.3 (CSS); plain fetch calls to the database	Live card, offline badge, history charts, readings table, school-day view, admin page, guide
Installable app	Web app manifest and a service worker that keeps only the page files, never readings	Add to the phone home screen; the page shell opens offline; shows heat alerts
Heat alerts	Database trigger with pg_net; Supabase Edge Function (Deno) "send-alert"; Web Push (RFC 8291 encryption, VAPID signing) written with the built-in Web Crypto functions; secrets kept in the Supabase Vault	Sends a notification to signed-up phones when the heat index reaches the alert level
Hosting	Vercel Hobby plan (free, non-commercial); content security policy set in vercel.json	Serves the web app
Testing	Node.js built-in test runner; Playwright 1.49.1 (Chromium) for pixel-by-pixel page checks; C++ tests built on the PC for the firmware logic	Test-first checks of the heat index, database rules, pages and OLED screens
Paper and diagrams	Node.js with docx 9.5.0; Chromium prints the PDF	Builds this paper in Word and PDF form


2.4 Hardware Design

The room monitor is an ESP32 board with a DHT22 sensor and an OLED screen, powered by a USB power bank. Figure 1 shows the whole system and Figure 2 the wiring. The first design used two 18650 cells and a converter; it was replaced by a power bank because there is nothing to build on the power side and the protection is inside the bank (D-008). An early bench test showed that the bank switched off whenever the board went to deep sleep, so deep sleep was dropped and the board stays awake (D-018).

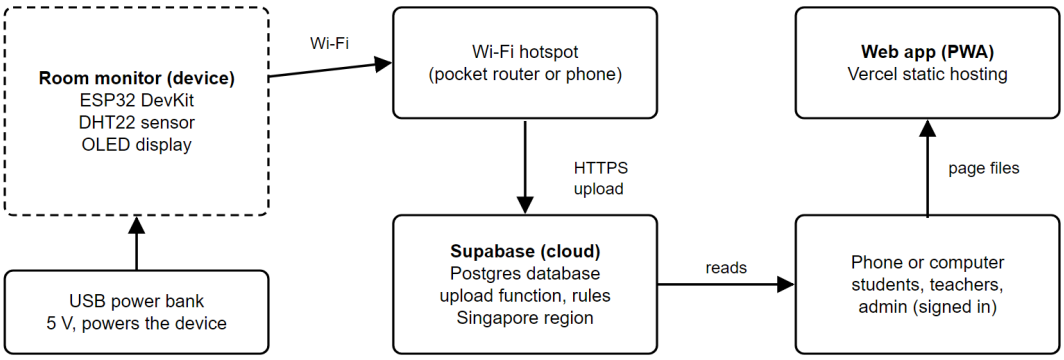

The device only sends. The public only reads. Settings are changed only by a signed-in admin.

Figure 1. System block diagram of Init

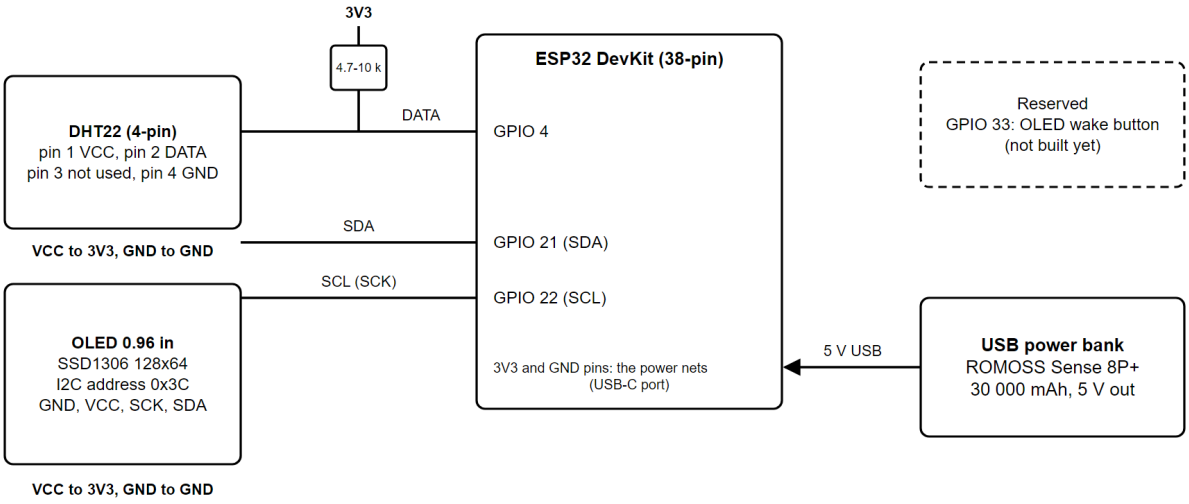

The OLED is powered from the board (3.3 V). No battery pack, converter, fuse or switch (design Rev B, D-008).

Figure 2. Wiring schematic of the room monitor (Rev B)

The case is being designed as a 3D printed enclosure for a Bambu Lab A1 printer in PETG (planned; nothing has been printed yet). The power bank sits inside the base, its screen is visible through a window in the lid and its ports stay open. The ESP32 and the OLED are in a raised electronics bay with vents, the OLED window is in the front wall, and the USB cable from the bank to the ESP32 runs through a hidden channel. The DHT22 sits in a vented pod at the end of a hollow arm that carries the jumper wires, so that the sensor is held low on the rear end of the case, away from the warm air that rises over the ESP32 and the power bank. The Init logo is engraved into the front wall and filled with paint. Because the power bank weighs about 670 g, two small stops at each end hold it so that it cannot slide inside the case in a fall, and the walls

are 3.2 mm thick with rounded corners (a drop test of the printed case is still to be done). Every part is held with countersunk screws that bite into the printed plastic (M2.5 x 8 for the case, from the screws already on hand, so nothing had to be bought). The model is written in OpenSCAD with the measured sizes as variables; the latest draft is about 215 x 91 x 72 mm without the arm. Most sizes now come from caliper measurements of the power bank, the ESP32, the OLED and the DHT22; a few are estimates that are checked on the draft before printing.

2.5 Software Design

The firmware (Figure 3) reads the sensor every 5 seconds, shows the values, keeps unsent readings in a queue of up to 300 (the oldest are dropped first) and sends them in batches of up to 50 over HTTPS about once a minute. It checks the server certificate against built-in root certificates, so a wrong server is refused. The device holds only a secret device key; the server returns the upload interval and the room name in its reply. If no saved Wi-Fi works within 20 seconds, the device opens its own setup page ("Init-Setup") so that a teacher can enter the school Wi-Fi from a phone, and the Wi-Fi password is never stored in the web app (D-011).

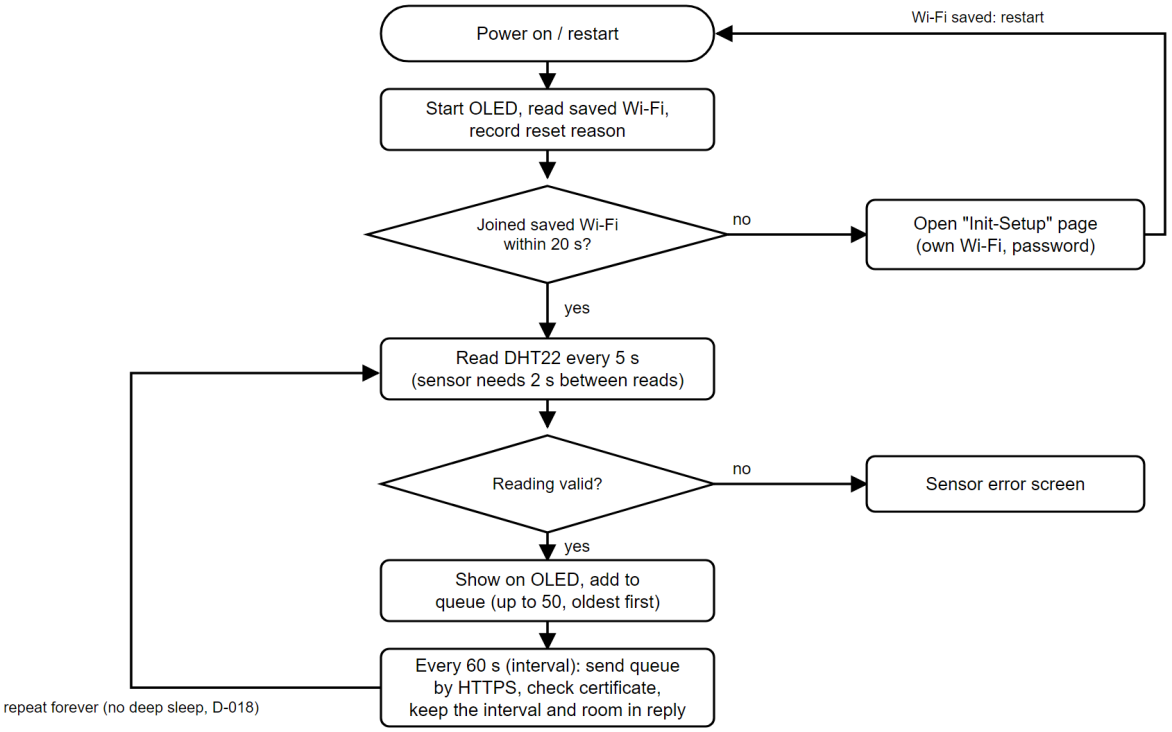


Figure 3. Firmware flowchart

The server side (Figure 4) accepts readings only through one database function. The function checks the device key, the number of readings per call (1 to 50), the ranges (temperature 0 to 60 °C, humidity 0 to 100 %) and the call rate. A bad call is rejected as a whole. The server

adds calibration offsets and computes the heat index itself, so a number worked out by the device is never trusted (D-023). Figure 5 shows the tables.

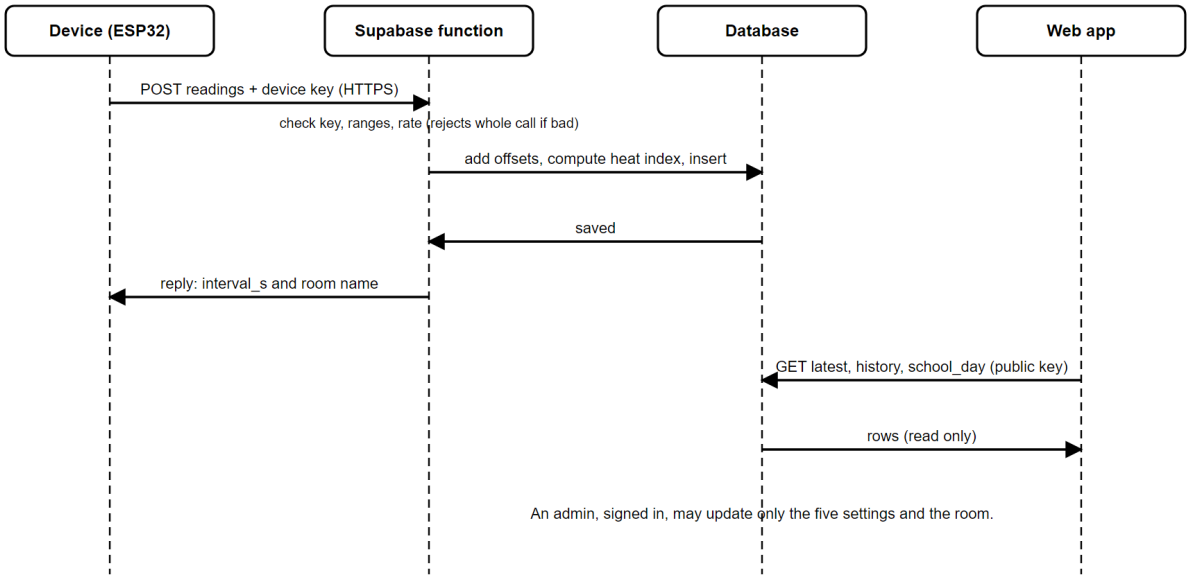


Figure 4. Upload and read sequence between device, cloud and web app

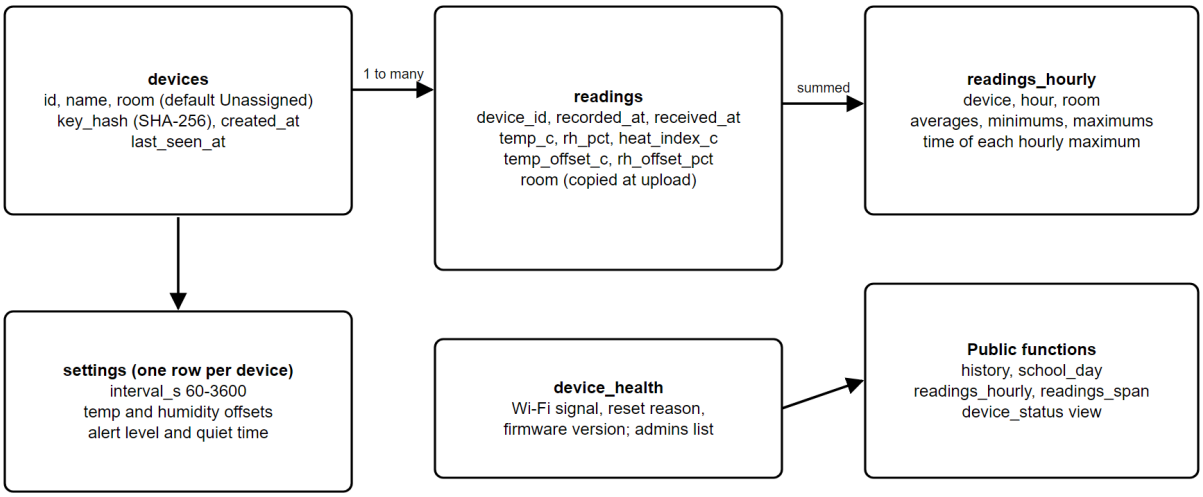


Figure 5. Database tables and functions

The web app (Figure 6) is a single page that anyone can open on a phone. It shows the live card with the PAGASA level and an online/offline badge (offline when the newest reading is more than 120 seconds old), history charts for 24 hours and 7 days, and a school-day summary. Under the history charts, a readings table lets a visitor pick a From and a To day on a calendar (only days that have readings can be picked) and see hourly averages of temperature, humidity and heat index with the PAGASA level, 500 rows at a time, and download the same rows as a

CSV file (F-24). The database function that serves it caps one call at 500 rows so that the free tier is not overloaded. The admin page requires sign-in; the server, not the page, decides who may change settings. The admin can type a room name or press Reset, which puts the default name Unassigned in the box; Save writes it (F-23). A device with no room assigned shows Unassigned on the web page and on its own screen.

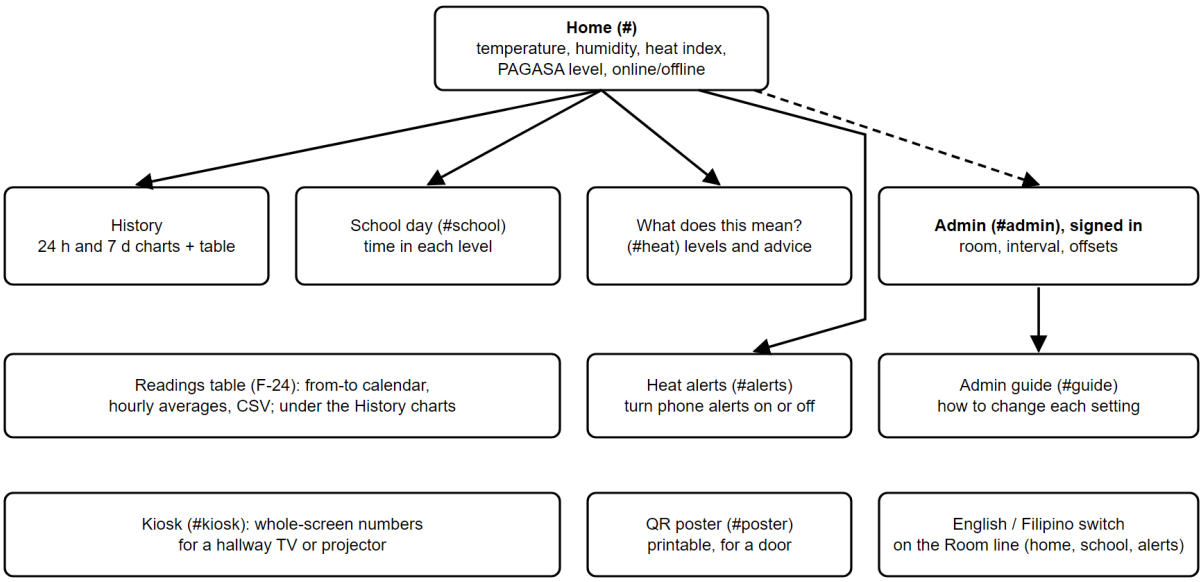



Figure 6. Pages of the web app

Two more pages are made for showing the readings to other people. The kiosk page (#kiosk, F-13) fills the whole screen of a hallway TV or a projector with the room name, the heat index in very large digits, the PAGASA level with its shape, the temperature and humidity, and the Online or Offline status; its background takes the colour of the level, and it refreshes every 30 seconds like the home page. When the newest reading is more than 120 seconds old it says Offline and keeps the last values, labelled as the last reading. The poster page (#poster, F-14) is a black-on-white sheet for a classroom door with the logo, a QR code that opens the app, the address in words and the four PAGASA levels; it has a Print button that is hidden when the page is printed. The QR code is drawn in the browser by the open-source qrcode-generator library and always points to the hosted app address, not to the address the page was opened from. Neither page is linked from the home page; they are opened by typing their address. Both pages were drawn as mock images first and the built pages were compared with the approved images pixel by pixel in an automatic test.

A language switch (F-18) lets a visitor choose English or Filipino. It is a small two-button control on the same line as the room name, with a check mark on the chosen language so that colour is not the only signal. All the words of the home page, the status line, the history charts,


the readings table, the school-day page, the heat-alerts page, the heat-information page, the admin guide and the admin page are kept in one English list and one Filipino list, and an automatic test checks that both lists have exactly the same entries and the same placeholders. The choice is remembered in the browser; if the browser blocks storage the page stays English and shows no error. The brand name, the term "heat index" (the term PAGASA uses), units and numbers are not translated. The Filipino words were first written as a draft for this project; a teacher reviewed and approved the translation (reported by the owner, 9 November 2026), and the switch was seen working on a phone on the hosted page the same day. The kiosk, the poster, the text of the push notification and the column names of the downloaded CSV file are still English only. The switch itself is on the pages that show the room name; the other pages follow the language chosen there. The names of the controls in the admin guide are checked by an automatic test against the labels on the admin page in both languages. The English and Filipino pages were drawn as mock images first (light and dark) and the built pages were compared with the approved images pixel by pixel, including a narrow 360-pixel case with the longest Filipino texts.

Figures 7 to 10 show the real pages of the web app on a phone in light mode (the owner’s Android phone for the live card, the offline badge and the heat alerts page; a phone-sized browser on the hosted page for the others, 5 November 2026). Figure 7 is the home page: the live card with the Online badge, the same page after the board was unplugged (the badge turns red and says Offline, the card is labelled Last heat index and keeps the last values), and the three history charts. Figure 8 shows the readings table with its calendar and CSV button, the school-day summary with the time in each level, and the Heat alerts page. Figure 9 shows the page that explains what the heat index means and the admin guide. Figure 10 shows the admin sign-in and the admin settings page (a test account, not the real admin). The screenshots hold no personal data.

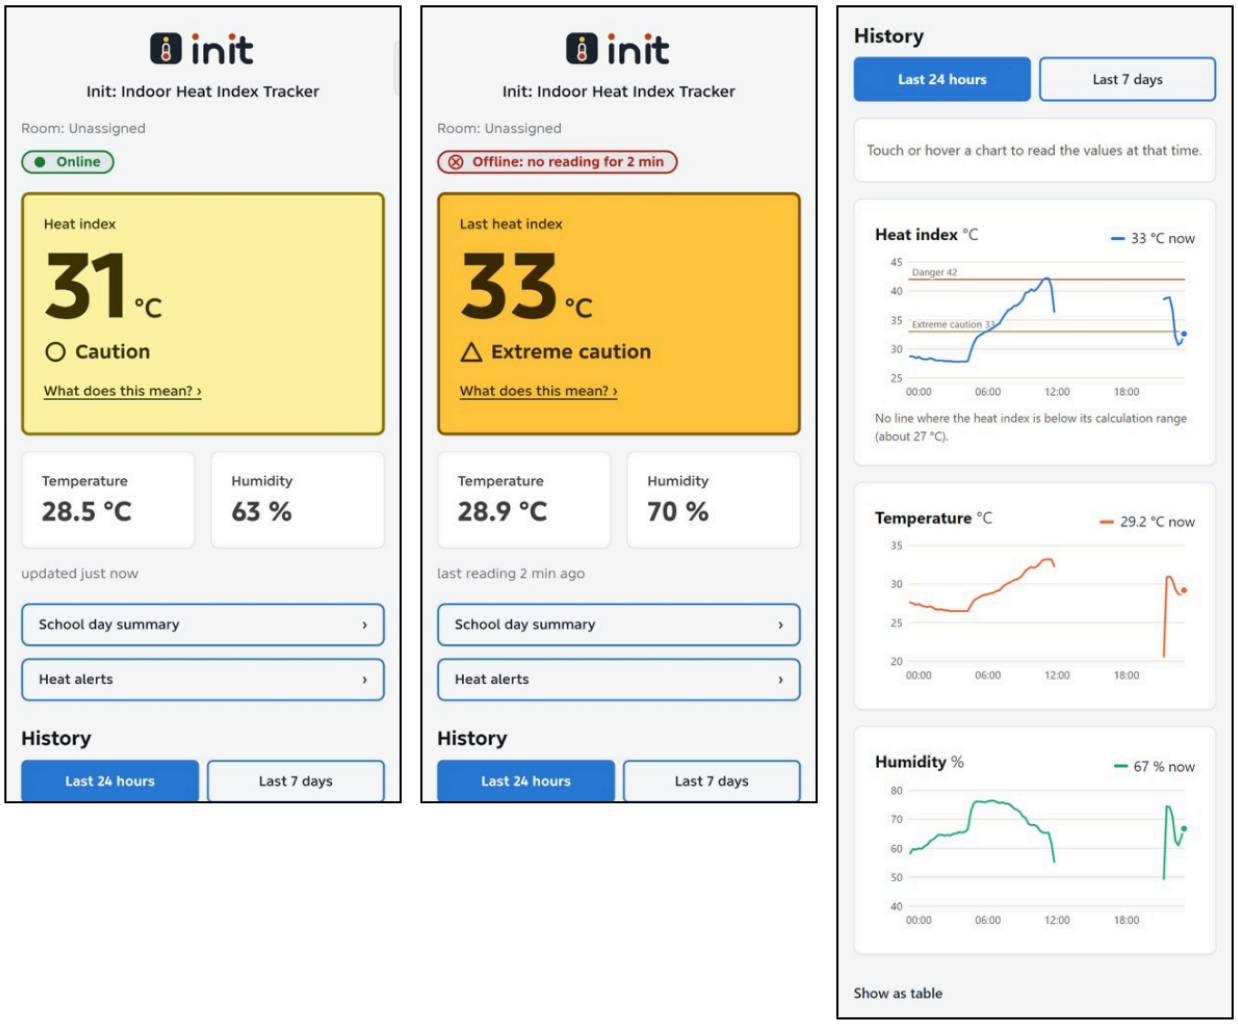


(a) Live card, online (b) Offline (c) History charts

Figure 7. Home page of the web app on an Android phone, light mode (5 November 2026)

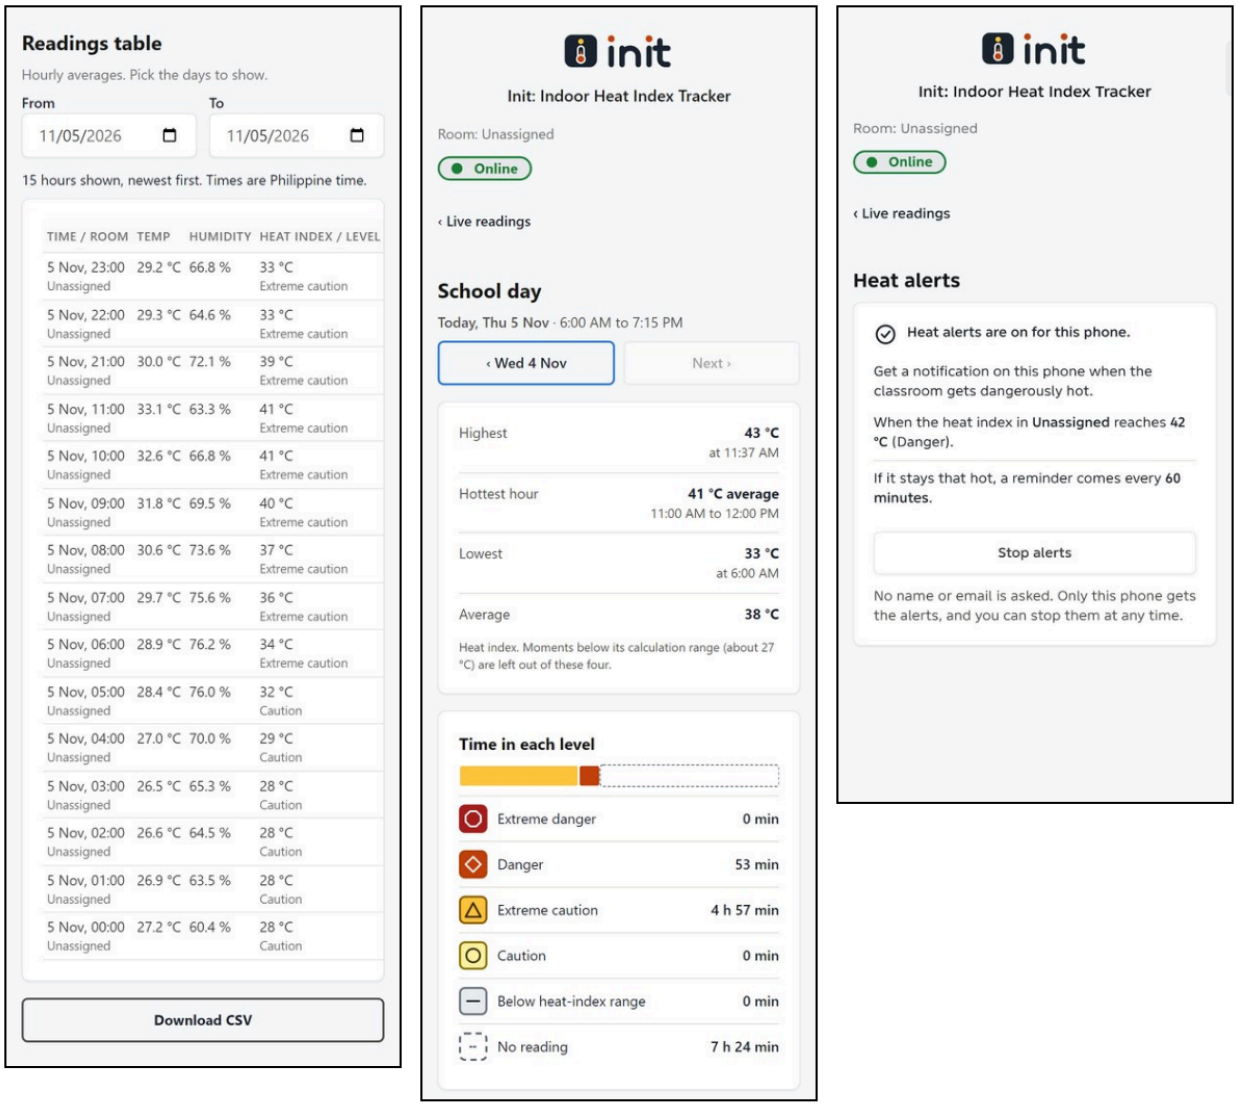


(a) Readings table (b) School day summary (c) Heat alerts

Figure 8. Readings table, school day summary and heat alerts pages

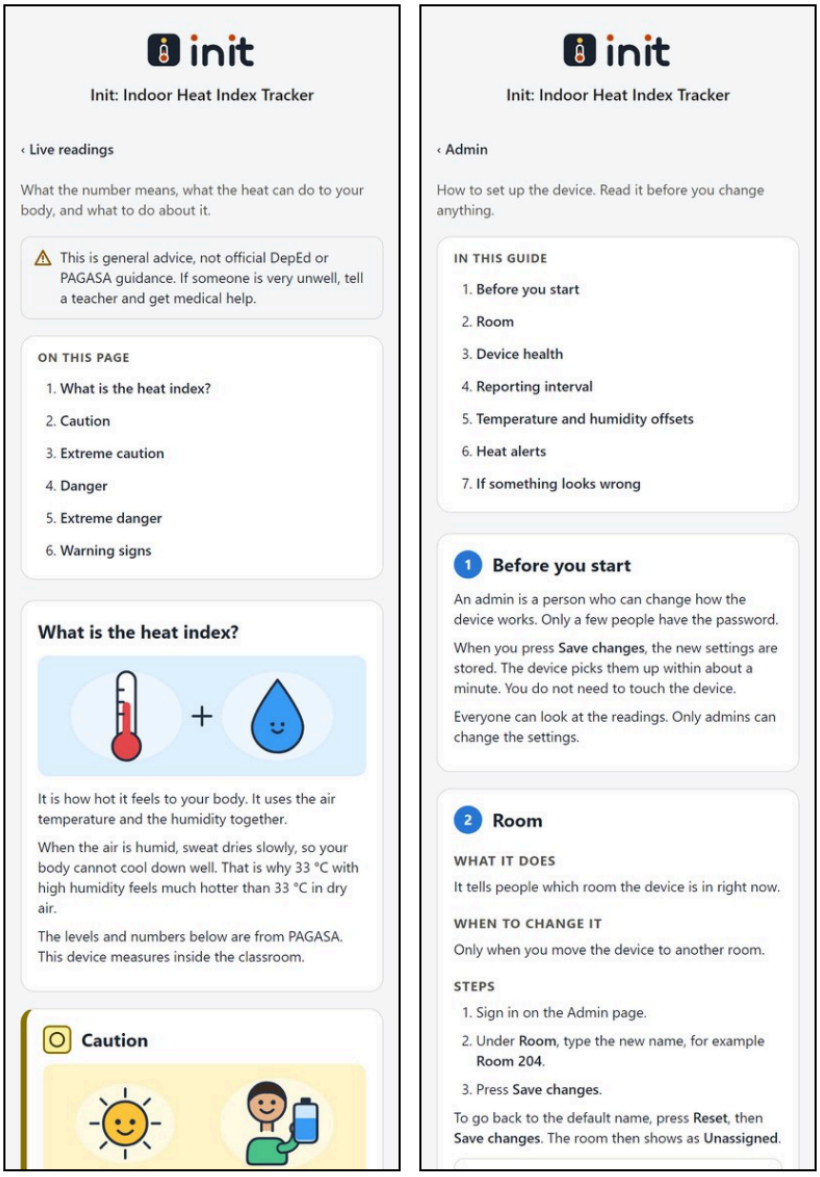

(a) What the heat index means (b) Admin guide

Figure 9. Help pages: what the heat index means and the admin guide

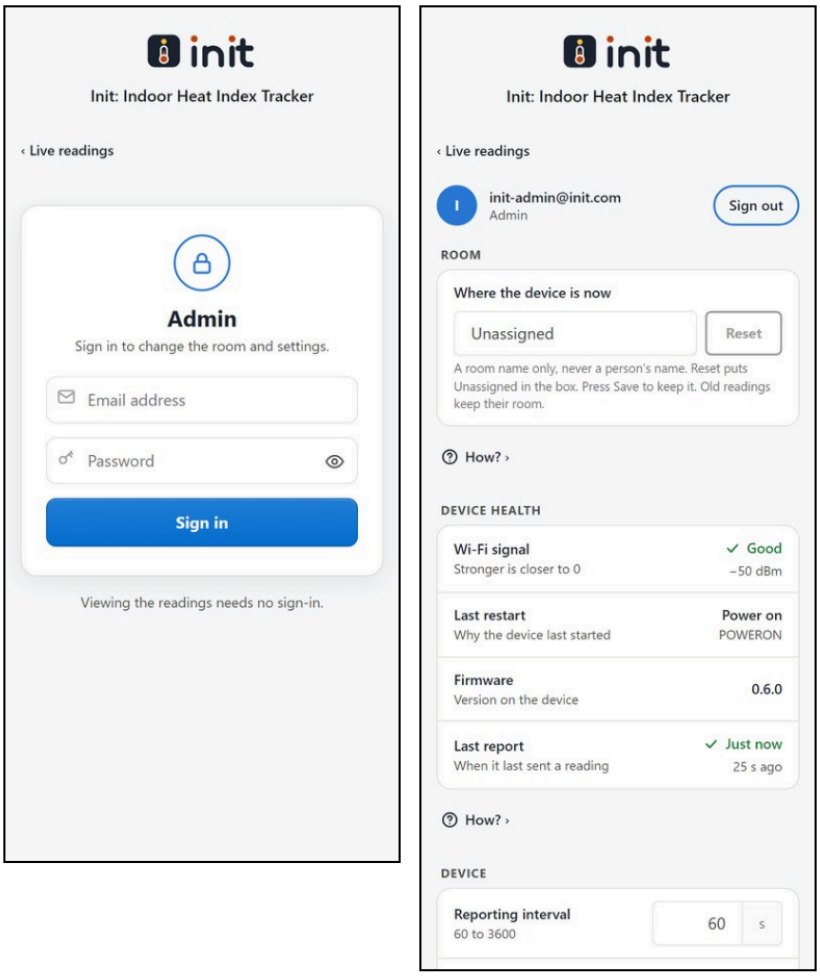

(a) Admin sign-in (b) Admin, signed in

Figure 10. Admin page: sign-in and settings (test account)

Heat alerts (F-10, Figure 11). A visitor can open the Heat alerts page and ask for alerts on that phone; the browser asks for permission only when the button is pressed, never when the page opens. Only the phone's push address and the browser's encryption keys are stored, with no name or email, and at most 300 phones can sign up. When readings arrive, a rule inside the database (a trigger) checks the newest fresh reading of each device: if its heat index, rounded to a whole degree, has reached the admin's alert level (42 °C, the start of the PAGASA danger level, unless the admin changes it) and no alert was sent for that device within the quiet time (60 minutes unless changed), it saves an alert and calls a small server program (an Edge Function). That program encrypts the message for each phone and sends it through the phone's own push service (Web Push), so the message cannot be read on the way. Phones that no longer accept messages are removed. On an iPhone, alerts work only after Init has been added to the Home Screen.

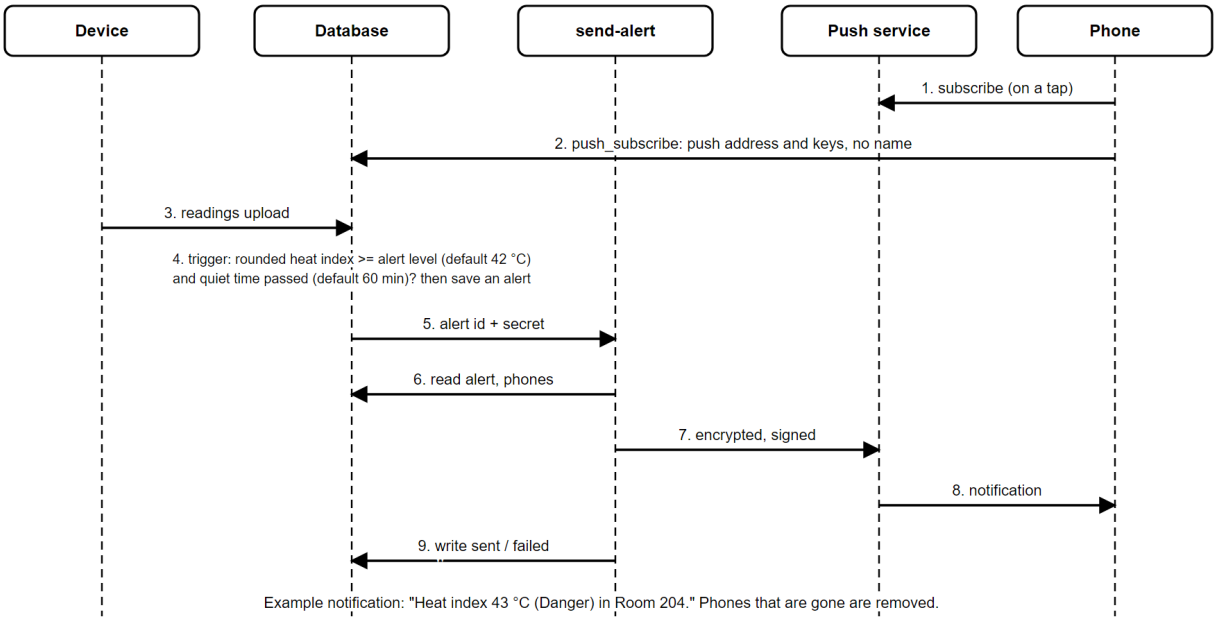


Figure 11. Heat alert sequence from an upload to a notification on a phone

2.6 Computing the Heat Index

The heat index is computed from the temperature and relative humidity with the National Weather Service polynomial approach, using the range rule of that method; below the range of the method the value is left empty (D-015, D-020). PAGASA levels are applied to the heat index rounded to a whole degree Celsius: Caution 27 to 32 °C, Extreme caution 33 to 41 °C, Danger 42 to 51 °C and Extreme danger 52 °C and above (Petaca, 2026; D-019). The formula exists in three languages, JavaScript, C++ for the device and SQL for the database, and all three are tested against the same file of expected values.

2.7 Research Procedure

1. Bench bring-up: the DHT22 and OLED were wired to the ESP32 and tested with a throw-away sketch.
2. The heat index function was written test-first and checked against the shared reference table.
3. The database, the secure upload function and the public read rules were built and tested on a separate test project; a "stranger" probe checks that a visitor with only the public key cannot write or read secrets.
4. The firmware was built in steps: upload, OLED screens, offline queue, room name from the server, Wi-Fi setup page and device health report.

5. The web app was built in steps: live card, offline badge, history charts, installable app, school-day view, admin page and guide. Each page was checked against an approved mock-up and then on the hosted page and a phone.

6. The admin rules were tested first on the test project (a visitor, a signed-in user who is not the admin, and the admin). Then the live project received its own admin account, made by the owner in the database dashboard; the write rules of the two projects were read back and compared, the admin signed in to the live project from the owner's computer, and the stranger probe was run against the live project.

7. The heat alerts were built test-first on the test project: 14 database tests (alert level, quiet time, rounding, stale readings, sign-up checks, the 300-phone cap) failed before the code existed and passed after; the encryption was checked against the published example of the Web Push standard byte for byte; then one upload from a throw-away device above a low alert level was followed from the database to the server program and back. On 5 November 2026 the real device, in a room whose heat index reached 41.5 °C (42 °C when rounded), set off an alert at the normal level of 42 °C: the owner's Android phone, signed up through the installed app, showed "Init heat alert — Heat index 42 °C (Danger) in Unassigned.", the alert was saved with 1 sent and 0 failed, and the next reading at the same level five minutes later did not send a second alert (quiet time).

8. A 24-hour run (P03-07) was done on the power bank. The device uploaded about once a minute; the charge of the bank was written down at the start, halfway and the end.

9. The offline rule was checked by unplugging the device and photographing the phone screen after two minutes.

2.8 Research Treatment of Data

Readings were counted and summarised with the minimum, mean and maximum. The expected number of readings in 24 hours at one per minute is 1,440. Gaps are the time between two consecutive readings; any gap over 90 seconds was listed. Hourly means were computed in Philippine time. The share of readings in each PAGASA level was computed from the heat index rounded to a whole degree. No statistical test was applied because there is a single device and a single run.

Chapter 3
Presentation, Analysis, and Interpretation of Data

I. Verification of the Heat Index Calculation

The heat index function was checked in JavaScript, C++ and SQL against one shared reference file. As of the latest full run (3 November 2026, session 27), the full test suite passed 204 of 204 tests, of which the backend tests are 80 of 80. The stranger probe, which acts as a visitor with only the public key, passed 21 of 21 checks against the test project in session 26 and 21 of 21 against the live project on 4 November 2026 (session 30). On both projects the only rule that lets anyone change data is the admin rule for the five settings, and the list of admins cannot be read or changed by a visitor or a signed-in user. [These numbers are refreshed each session; see Appendix C.]

II. The 24-Hour Run on the Power Bank

The run started on 2 November 2026 at 18:03 Philippine time with the power bank at 100 % and ended on 3 November 2026 at 18:03. It was done in two legs of about 12 hours with a short break between them. The server recorded 1,429 readings of about 1,440 expected (99.2 % of the expected number). The power bank went from 100 % to 95 % and then to 90 %.

Table 4. Summary of the 24-hour run (test project, one device)

Measure	Minimum	Mean	Maximum
Temperature (°C)	26.6	30.1	33.0
Relative humidity (%)	51.0	65.9	77.4
Heat index (°C)	27.9	34.7	43.8

Table 5. Time in each PAGASA level during the run (number of one-minute readings)

PAGASA level (heat index, rounded)	Readings	Share
Caution (27 to 32 °C)	376	26.3 %
Extreme caution (33 to 41 °C)	1024	71.7 %
Danger (42 to 51 °C)	29	2.0 %
Extreme danger (52 °C and above)	0	0.0 %

Most of the time the room was in the extreme caution level (71.7 % of readings) and 29 readings (2.0 %) reached the danger level. The highest heat index was 43.8 °C. Figure 12 and the hourly values (Table 6) show how the room changed through the day: the highest heat index of an hour reached 43.8 °C at 09:00 and the room was coolest between 11 PM and 2 AM. The last hour of the run holds only 4 readings, so it is in Table 6 but not drawn in Figure 12. In Figure 12

the lines of the two top series are different in style so that they can be told apart in a black-and-white print, and the humidity is drawn in a separate panel because it has a different unit.

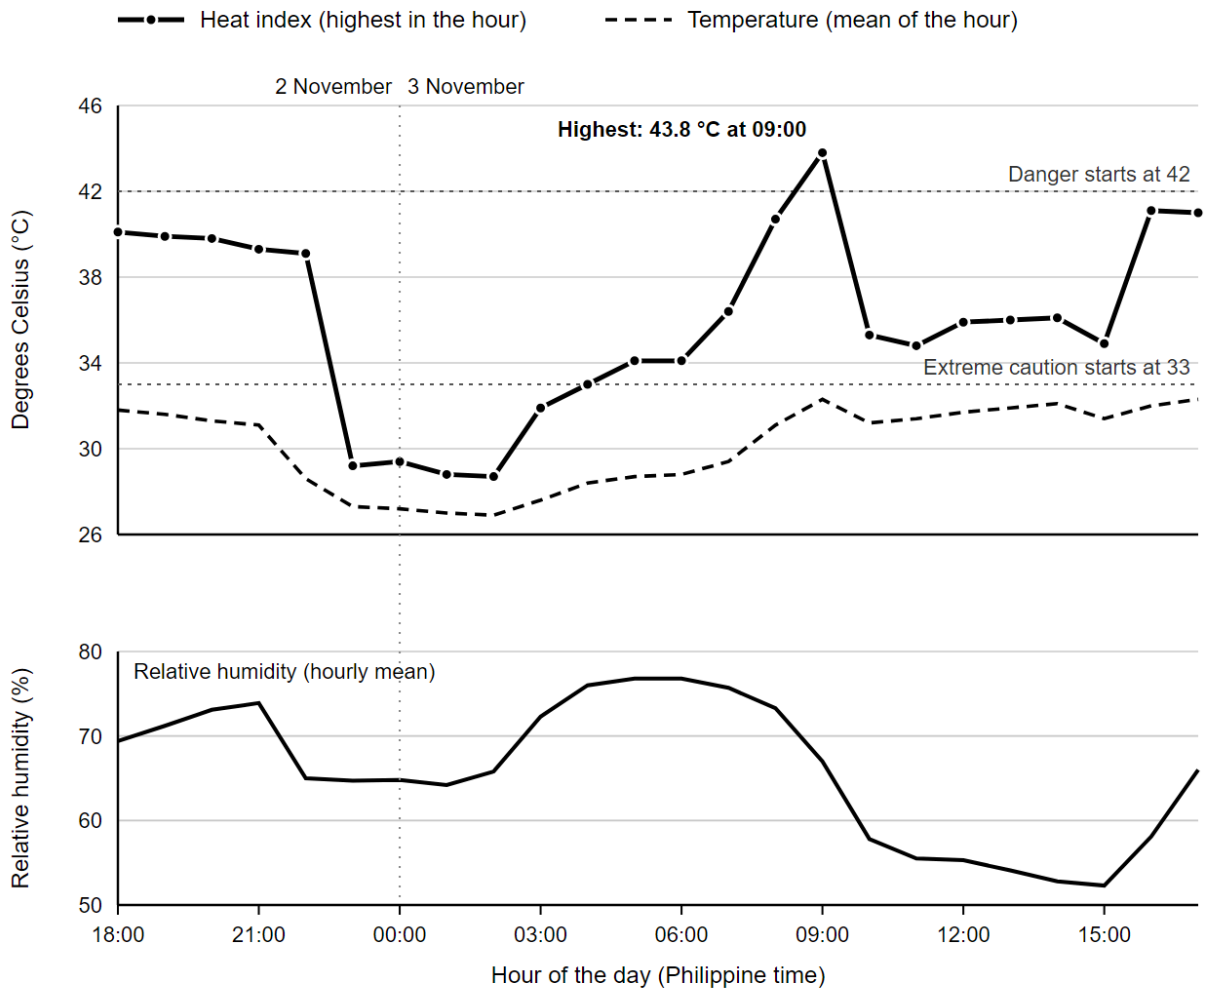


Figure 12. Heat index, temperature and relative humidity in the 24-hour run (hourly values, 2 to 3 November 2026)

Interpretation of Figure 12

Heat index and temperature (top panel). The solid line (the highest heat index of each hour) stays above the dashed line (the mean temperature) in every hour, because humidity makes the air feel hotter than the thermometer shows. In 19 of the 24 hours drawn, the highest heat index was 33 °C or more, which is the extreme caution level or higher; only five hours, from 11 PM to 3 AM, were below 33 °C. One hour, 9 AM on 3 November, crossed the 42 °C line into the danger level (43.8 °C). The heat index of the evening before (6 PM to 10 PM) was steady at about 39 to 40 °C, then fell sharply by 10 °C between 10 PM and 11 PM, when the mean

temperature also fell from 28.6 to 27.3 °C and the room stayed near 29 °C heat index until about 3 AM. The study did not record why the room cooled at that hour (for example weather, a fan or the use of the room), so the cause is not known. From 3 AM the heat index climbed through the morning to its peak at 9 AM.

Humidity (bottom panel). Relative humidity moved between 52.3 % and 76.8 %. It was highest in the early morning (76.8 % at 5 and 6 AM) and lowest in the afternoon (52.3 % at 3 PM). This explains the shape of the top panel: at 9 AM the mean temperature was 32.3 °C with 67.0 % humidity and the highest heat index was 43.8 °C, but at 2 PM the mean temperature was almost the same, 32.1 °C, with 52.8 % humidity and the highest heat index was only 36.1 °C. Two hours with about the same temperature therefore felt very different, which is the reason this project reports the heat index and not temperature alone. (The two numbers are not the same kind of statistic: the heat index is the highest of the hour and the temperature is the mean of the hour, so the gap between them is partly a result of that choice.)

What it means. During the school hours covered by the app (6 AM to 7:15 PM), every drawn hour from 6 AM to 5 PM had a highest heat index of 34.1 °C or more, that is, in the extreme caution level or higher, and the two hours before 6 PM (4 PM and 5 PM) were close to the danger line at 41.1 and 41.0 °C. Under the PAGASA classification, extreme caution means that heat cramps and heat exhaustion are possible (Petaca, 2026). These statements describe one room on one day (3 November 2026, a school day) measured by a sensor that has not yet been compared with a reference thermometer, and hourly values hide changes within the hour; they cannot be applied to other rooms or seasons.

Table 6. Hourly values of the 24-hour run (Philippine time)

Hour	Readings	Mean temp (°C)	Mean humidity (%)	Highest heat index (°C)
2026-11-02 18:00	56	31.8	69.4	40.1
2026-11-02 19:00	59	31.6	71.2	39.9
2026-11-02 20:00	60	31.3	73.1	39.8
2026-11-02 21:00	60	31.1	73.9	39.3
2026-11-02 22:00	60	28.6	65.0	39.1
2026-11-02 23:00	60	27.3	64.7	29.2
2026-11-03 00:00	57	27.2	64.8	29.4
2026-11-03 01:00	60	27.0	64.2	28.8
2026-11-03 02:00	60	26.9	65.8	28.7
2026-11-03 03:00	60	27.6	72.3	31.9
2026-11-03 04:00	60	28.4	76.0	33.0
2026-11-03 05:00	60	28.7	76.8	34.1

Hour	Readings	Mean temp (°C)	Mean humidity (%)	Highest heat index (°C)
2026-11-03 06:00	54	28.8	76.8	34.1
2026-11-03 07:00	60	29.4	75.7	36.4
2026-11-03 08:00	60	31.1	73.3	40.7
2026-11-03 09:00	60	32.3	67.0	43.8
2026-11-03 10:00	60	31.2	57.8	35.3
2026-11-03 11:00	60	31.4	55.5	34.8
2026-11-03 12:00	60	31.7	55.3	35.9
2026-11-03 13:00	60	31.9	54.1	36.0
2026-11-03 14:00	60	32.1	52.8	36.1
2026-11-03 15:00	59	31.4	52.3	34.9
2026-11-03 16:00	60	32.0	58.1	41.1
2026-11-03 17:00	60	32.3	66.0	41.0
2026-11-03 18:00	4	31.9	68.0	39.5

Only 2 gaps longer than 90 seconds were found: 220 seconds and 385 seconds. The 385-second gap is the break between the two legs. The cause of the other gap has not yet been found; the firmware now reports why it restarted (power-on, brown-out, crash or watchdog) so that the next run can show it (P03-07 follow-up).

III. Offline Check and Power Bank Behaviour

When the device was unplugged, the hosted page showed "Offline: no reading for 2 min" in the owner's phone screenshot taken at two minutes. In an earlier test on the power bank, uploads every 90 seconds made the bank switch itself off after about a minute, while uploads every 60 seconds ran for 10 minutes and then for the full 24 hours. For this bank the interval therefore has to stay at 60 seconds (D-027). On 5 November 2026 the interval was changed from the admin page on a phone: the device took the new value at its next upload (gaps of 120 seconds instead of 60) and the bank stayed on for the 5 minutes of that test, which is too short to change the rule. The same page was used to test the calibration offsets: after a temperature offset of +0.9 °C and a humidity offset of +5 % were saved, the next reading rose by 0.8 °C and 4.8 %, and after the offsets were saved as -0.9 °C and -5 % it fell by 1.9 °C and 9.1 % (sensor noise explains the small differences). The offsets were chosen by comparing with a room thermometer that read 27.9 °C; this is not a proper accuracy check against a reference.

IV. Features Built and Verified

Table 7. Progress of the project by phase (project table, 6 November 2026)

Phase	Done / Total	%
P00 Kickoff and decisions	13 / 13	100

Phase	Done / Total	%
P01 Heat index core and bench bring-up	7 / 7	100
P02 Backend and secure upload	7 / 7	100
P03 Device firmware	10 / 10	100
P04 Web app core	13 / 13	100
P05 Admin, alerts and device health	7 / 7	100
P06 Display and sharing extras	4 / 5	80
P07 Field trial and hardening	0 / 7	0
P08 Over-the-air updates (optional)	0 / 3	0
Whole project	61 / 72	85

V. Not Yet Done

- Comparison of the DHT22 with a reference thermometer and hygrometer (sensor accuracy).
- Push alerts to phones: a real alert reached the owner's Android phone on 5 November 2026 (test project). Not yet seen: the reminder after the quiet time, an alert on an iPhone, and alerts on the live project, which does not have the feature yet. A teacher still has to review the alert wording.
- A real settings change on the live project: the live admin account works (4 November 2026), but the admin page finds its device through the newest reading, and the live project has none until the device is moved there from the test project.
- The calendar readings table (F-24) is built and tested; the owner confirmed on 3 November 2026 that on the hosted page it picks days, shows hourly rows and downloads a CSV. The live project has no readings yet, so the table there says "No readings yet".
- Reset room to Unassigned (F-23) was seen working on 3 November 2026: an admin saved a room name, the page and the OLED showed it, then Reset and Save put the room back to Unassigned on both (screenshots by the owner). The firmware default Unassigned is flashed on the board.
- The installed app was seen on an iPhone on 4 November 2026 (opened from the Home Screen icon, full screen, with a school day of several levels); the offline page and light mode were checked on an Android phone on 5 November 2026 (the page showed Offline after two minutes without a reading and went back to Online when the board was plugged in again).

- The QR poster (F-14) is built and its picture is identical to the approved image, which a QR decoder read as the hosted app address; the owner scanned it with a phone from the hosted page and it opened the app; the owner reports that the kiosk page was seen on a television or projector (9 November 2026).
- Filipino text (F-18): the kiosk, the poster, the push notification text and the CSV column names are still English only.
- The enclosure (P07-01): the design is a draft and has not been printed or tested; the sensor heat offset caused by the case is not yet measured.
- The cause of the 220-second gap in the run, and a run in a real classroom (phase P07).

References

- Kirkil, G. (2025). Effects of classroom temperature and humidity on student learning performance: an experimental study using sensor-based monitoring. Frontiers in Built Environment, 11, Article 1678438. https://doi.org/10.3389/fbuil.2025.1678438
- Lu, Y.-C., & Romps, D. M. (2022). Extending the Heat Index. Journal of Applied Meteorology and Climatology, 61(10), 1367-1383. https://doi.org/10.1175/JAMC-D-22-0021.1
- Petaca, M. A. (2026, April 22). Heat index monitoring and early warning system of DOST-PAGASA [Slide presentation]. DOST-PAGASA, Climatology and Agrometeorology Division. https://pubfiles.pagasa.dost.gov.ph/climps/climateforum/special_lecture.pdf
- Philippine Atmospheric, Geophysical and Astronomical Services Administration. (2024, April 12). Official statement on creating extreme heat protocol [Press release]. DOST-PAGASA. https://www.pagasa.dost.gov.ph/index.php/press-release/155
- Tzintzun, I., Schwarz, L., Lawrence, A., & Thomas, M. (2026). Effects of extreme temperature exposure on learning (ADB Economics Working Paper Series No. 866). Asian Development Bank. https://www.adb.org/sites/default/files/publication/1185876/ewp-866-extreme-temperature-exposure-learning.pdf
- Wardani, I. K., Ichniarsyah, A. N., Telaumbanua, M., Priyonggo, B., Fil'aini, R., Mufidah, Z., & Dewangga, D. A. (2023). The feasibility study: Accuracy and precision of DHT 22 in measuring the temperature and humidity in the greenhouse. IOP Conference Series: Earth and Environmental Science, 1230(1), Article 012146. https://doi.org/10.1088/1755-1315/1230/1/012146
- Widjaja, M., Halim, D. K., & Andarini, R. (2022). The development of an IoT-based indoor air monitoring system towards smart energy efficient classroom. Ultima Computing: Jurnal Sistem Komputer, 14(1), 28-35. https://doi.org/10.31937/sk.v14i1.2565

Appendices

Appendix A. Pin list of the room monitor

Table A1. Connections

ESP32 pin	Connected to	Note
3V3	DHT22 pin 1 (VCC)	and the pull-up resistor
GPIO 4	DHT22 pin 2 (DATA)	4.7 to 10 kΩ pull-up to 3V3
GPIO 21	OLED SDA	I2C
GPIO 22	OLED SCL (SCK)	I2C
GND	DHT22 pin 4, OLED GND	
GPIO 33	reserved	OLED wake button, not built
USB-C	USB power bank	5 V

Appendix B. Database settings and limits

Table B1. Settings the admin can change

Setting	Allowed range
Upload interval	60 to 3600 s (60 s for the power bank)
Temperature offset	-5.0 to +5.0 °C
Humidity offset	-10.0 to +10.0 %
Alert heat index	27 to 60 °C
Alert quiet time	10 to 1440 min
Room name	up to 12 characters

Appendix C. Tests and checks

- Full suite (3 November 2026): 204 of 204 passed; backend tests 80 of 80; stranger probe 21 of 21 on the test project (session 26) and 21 of 21 on the live project (4 November 2026, session 30). The numbers are refreshed each session.
- Page checks compare the built page with approved mock-ups pixel by pixel in Chromium at phone width, in light and dark mode.
- The 24-hour data in Chapter 3 are saved in the project folder paper/data as JSON files.

Appendix D. Project decisions

The numbered decisions (D-001 to D-034) referred to in this paper are kept in the project file documentation/DECISIONS.md with the date and the reason for each.