All specifications are subject to change without notice.
Typical for 25 °C unless otherwise specified.
Specifications in *italic* text are guaranteed by design.

Thermocouple input

Table 1. Thermocouple input specifications

Parameter	Condition	Specification
A/D converter		Delta-Sigma
ADC resolution		24 bits
Number of channels		4
Input isolation	*Between input and Raspberry Pi ground*	*500 Vpk withstand max*
Differential input voltage range		*±78.125 mV*
Common mode voltage range	*Between any CHx+ or – input and any other input*	*0.8 V max*
Absolute maximum input voltage	*Between any two TCx inputs*	*±25 V (power on)* *±25 V (power off)*
Differential input impedance		*40 MΩ*
Input current		*83 nA*
Common mode rejection	*f_{IN} = 50 Hz or 60 Hz*	*93 dB*
Update interval		1 second min
Open thermocouple detection response time		2 seconds
Recommended warm-up time		15 minutes min
Calibration method		Factory

Compatible thermocouples

Table 2. Compatible sensor type specifications

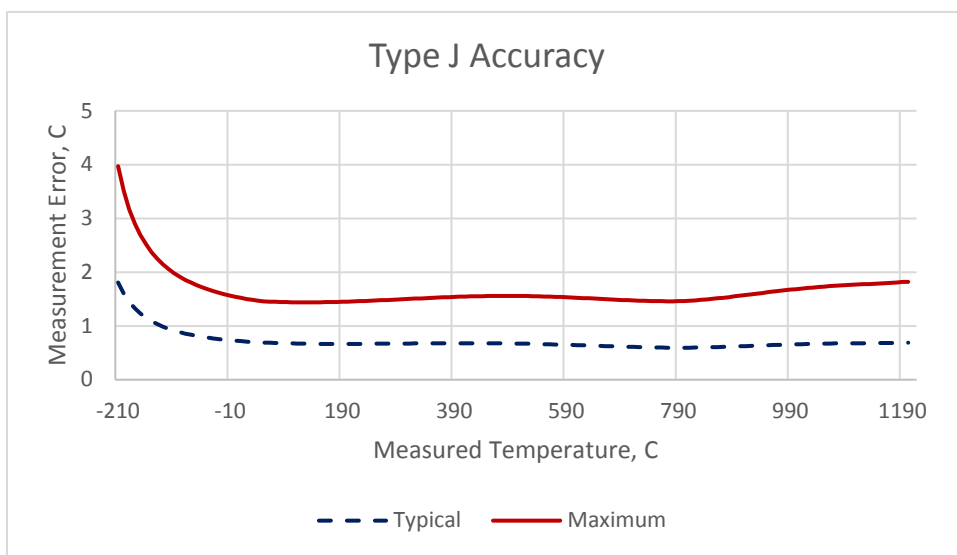| Parameter	Specification
Thermocouple type	J: –210 °C to 1200 °C
	K: –270 °C to 1372 °C
	R: –50 °C to 1768 °C
	S: –50 °C to 1768 °C
	T: –270 °C to 400 °C
	N: –270 °C to 1300 °C
	E: –270 °C to 1000 °C
	B: 50 °C to 1820 °C

Accuracy

Thermocouple measurement accuracy

Thermocouple accuracy specifications, including typical CJC measurement error.
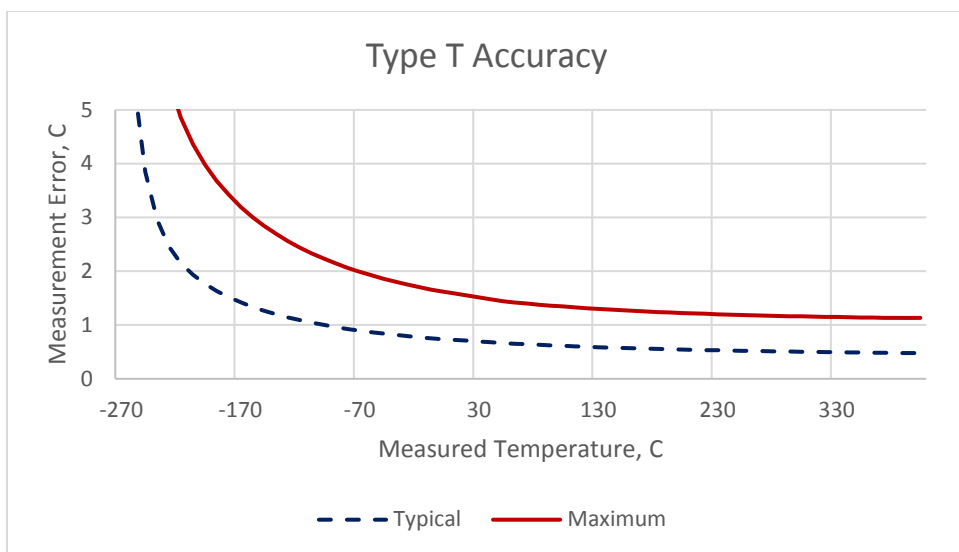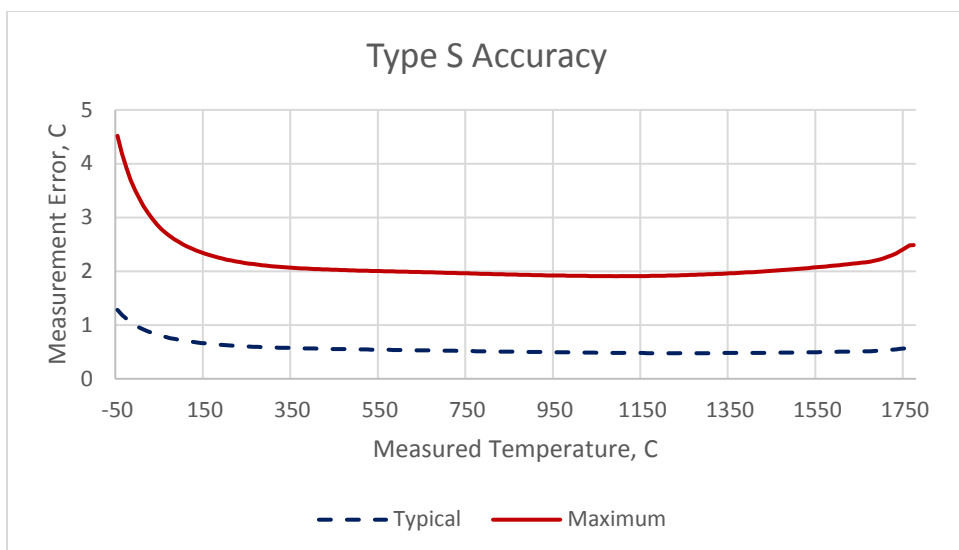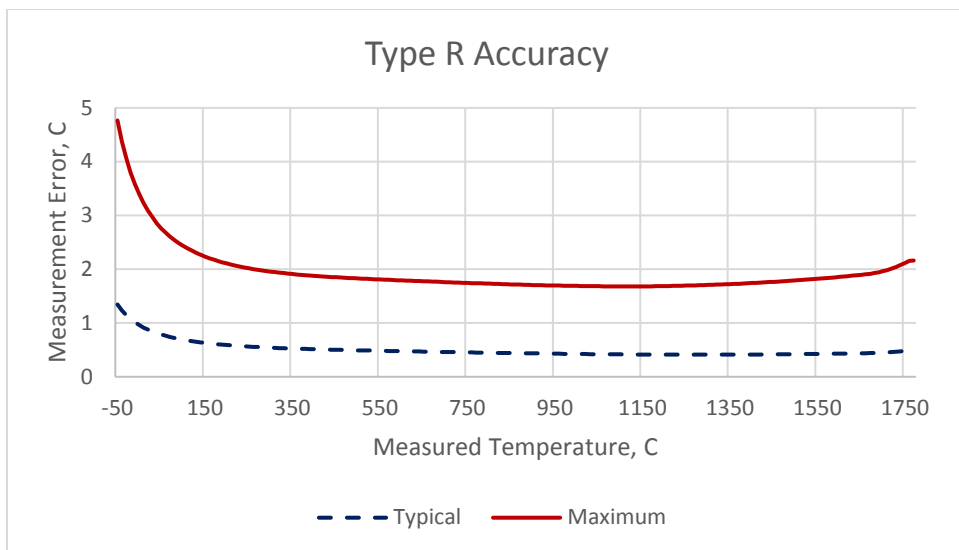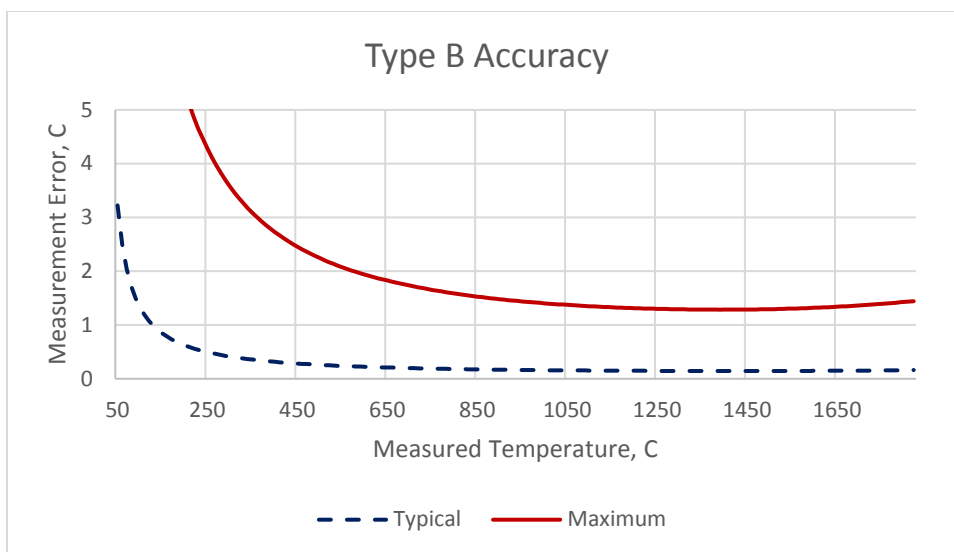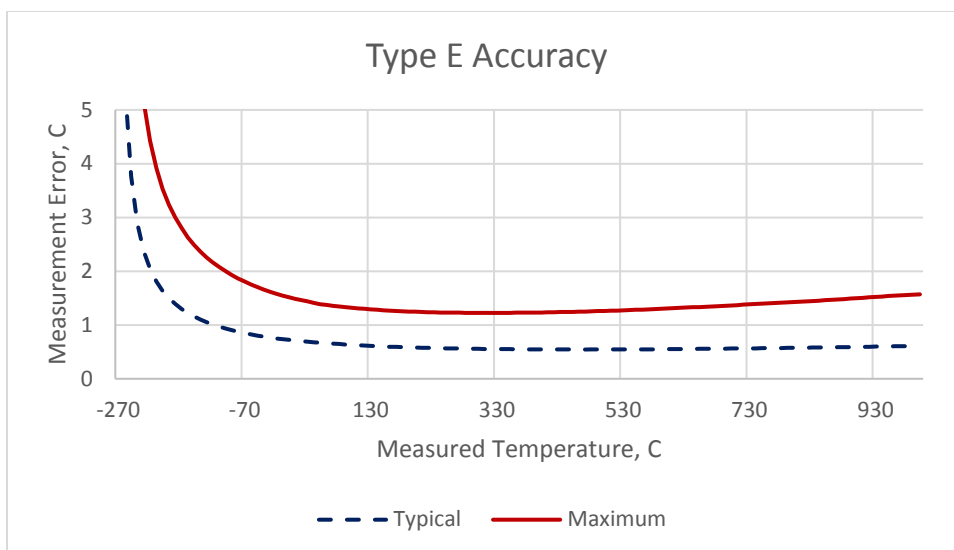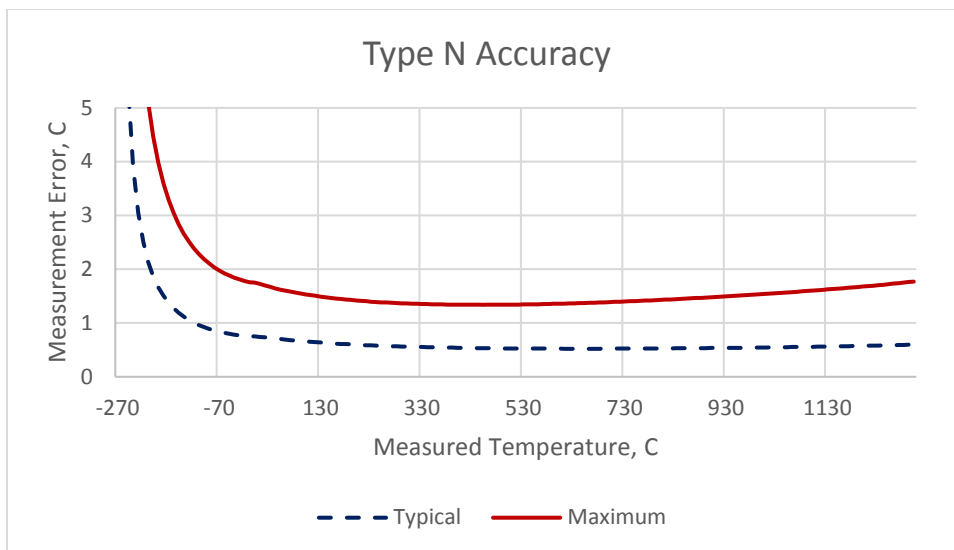All specifications are (±).

Note 1: Thermocouple measurement accuracy specifications include polynomial linearization, cold-junction compensation error, and system noise. Accuracies shown do not include inherent thermocouple error or large temperature gradients across the board. Contact your thermocouple supplier for details on the inherent thermocouple accuracy error. The accuracy specifications assume the device has been warmed up for the recommended 15 minutes.

Note 2: To avoid excessive cold-junction compensation errors, operate the device in a stable temperature environment and away from heat sources that could cause temperature gradients across the board. Refer to the documentation for ways to decrease this error.

Note 3: When thermocouples are attached to conductive surfaces, the voltage differential between multiple thermocouples must remain within ±0.8 V. For best results MCC recommends using electrically insulated thermocouples when possible.

Type J Accuracy

Measurement Error, C — Measured Temperature, C

- - - Typical   —— Maximum

Type K Accuracy

Measurement Error, C — Measured Temperature, C

- - - Typical   —— Maximum

Type R Accuracy

Measurement Error, C vs. Measured Temperature, C

- - - Typical   —— Maximum

Type S Accuracy

Measurement Error, C vs. Measured Temperature, C

- - - Typical   —— Maximum

Type T Accuracy

Measurement Error, C vs. Measured Temperature, C

- - - Typical   —— Maximum

Type N Accuracy

Measurement Error, C

Measured Temperature, C

- - - Typical — Maximum

Type E Accuracy

Measurement Error, C

Measured Temperature, C

- - - Typical — Maximum

Type B Accuracy

Measurement Error, C

Measured Temperature, C

- - - Typical — Maximum

Memory

Table 3. Memory specifications

Parameter	Specification
Non-volatile memory	4 KB (ID and calibration storage, no user-modifiable memory)

Power

Table 4. Power specifications

Parameter	Conditions	Specification
Supply current, 5V supply	Typical	16 mA
	Maximum	24 mA
Supply current, 3.3V supply	Typical	1 mA
	Maximum	5 mA

Interface

Table 5. Interface specifications

Parameter	Specification
Raspberry Pi ™ GPIO pins used	GPIO 8, GPIO 9, GPIO 10, GPIO 11 (SPI interface) ID_SD, ID_SC (ID EEPROM) GPIO 12, GPIO 13, GPIO 26, (Board address)
Data interface type	SPI slave device, CE0 chip select
SPI mode	1
SPI clock rate	2 MHz, max

Environmental

Table 6. Environmental specifications

Parameter	Specification
Operating temperature range	0 °C to 55 °C
Storage temperature range	–40 °C to 85 °C
Humidity	0 °C to 90% non-condensing

Mechanical

Table 7. Mechanical specifications

Parameter	Specification
Dimensions (L × W × H)	65 × 56.5 × 12 mm (2.56 × 2.22 × 0.47 in.) max

Screw terminal connector

Table 8. Screw terminal connector specifications

Parameter	Specification
Connector type	Screw terminal
Wire gauge range	16 AWG to 30 AWG

Table 9. Screw terminal pinout

Pin	Signal Name	Pin Description
1	CH0H	CH0 sensor input (+)
2	CH0L	CH0 sensor input (–)
3	CH1H	CH1 sensor input (+)
4	CH1L	CH1 sensor input (–)
5	CH2H	CH2 sensor input (+)
6	CH2L	CH2 sensor input (–)
7	CH3H	CH3 sensor input (+)
8	CH3L	CH3 sensor input (–)