NOTE. The document identifier and heading have been changed on this page to reflect that this is a performance specification. There are no other changes to this document. The document identifier on subsequent pages has not been changed, but will be changed the next time this document is revised.

INCH-POUND

MIL-PRF-28861/3B
23 August 1993
SUPERSEDING
~~MIL-F-28861/3A~~
2 November 1988

PERFORMANCE SPECIFICATION SHEET

# FILTERS, RADIO FREQUENCY/ELECTROMAGNETIC INTERFERENCE SUPPRESSION, HERMETICALLY SEALED, STYLE FS30

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-F-28861.

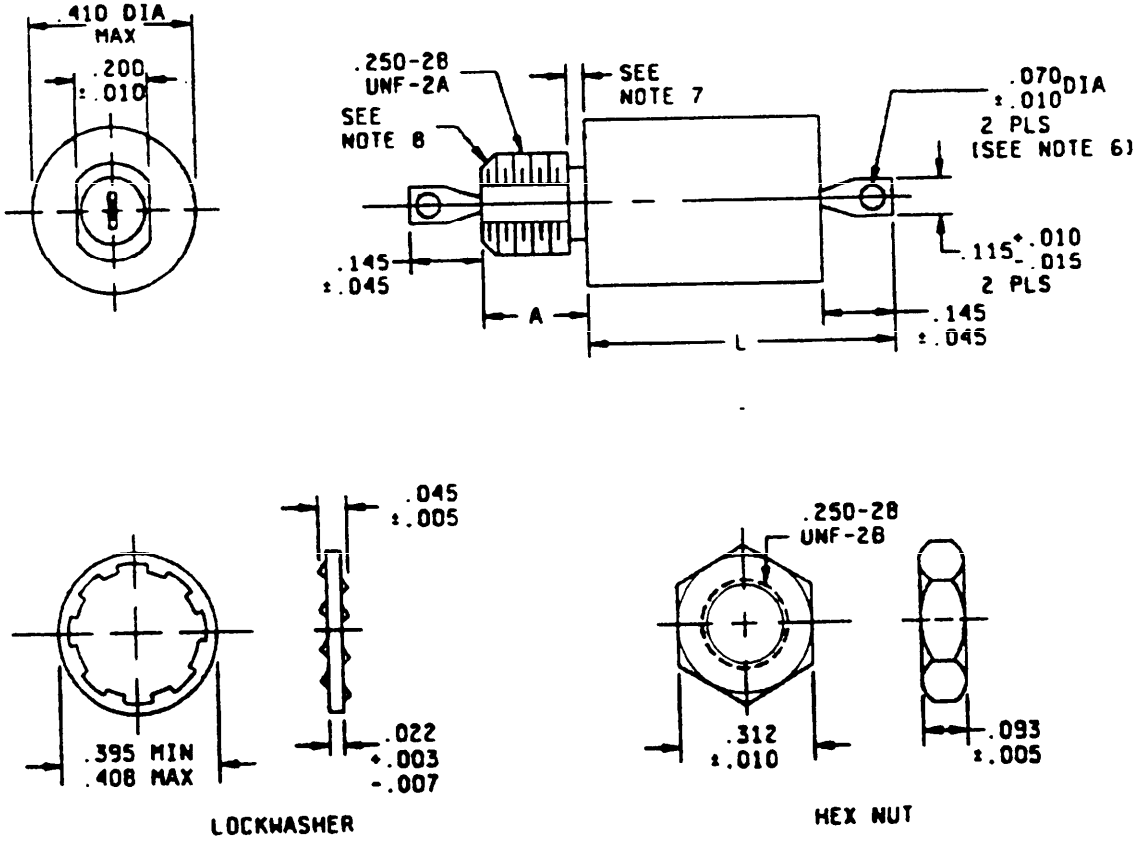



FIGURE 1. Case and hardware dimensions and circuit diagrams.

(B) denotes changes




FSC 5915

AMSC N/A

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T20:06Z
Check the source to verify that this is the current version before use.

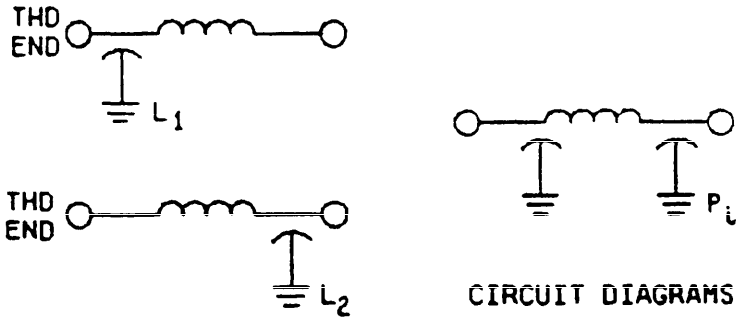


CIRCUIT DIAGRAMS

| Dash number | A dimension (±.010) | L dimension max | Dash number | A dimension (±.010) | L dimension max |
|---|---|---|---|---|---|
| 001 | .187 | .630 | 019 | .312 | .630 |
| 002 | .187 | .630 | 020 | .312 | .630 |
| 003 | .187 | .730 | 021 | .312 | .730 |
| 004 | .187 | .630 | 022 | .312 | .630 |
| 005 | .187 | .630 | 023 | .312 | .630 |
| 006 | .187 | .730 | 024 | .312 | .730 |
| 007 | .187 | .630 | 025 | .312 | .630 |
| 008 | .187 | .630 | 026 | .312 | .630 |
| 009 | .187 | .730 | 027 | .312 | .730 |
| 010 | .187 | .630 | 028 | .312 | .630 |
| 011 | .187 | .630 | 029 | .312 | .630 |
| 012 | .187 | .730 | 030 | .312 | .730 |
| 013 | .187 | .630 | 031 | .312 | .630 |
| 014 | .187 | .630 | 032 | .312 | .630 |
| 015 | .187 | .730 | 033 | .312 | .730 |
| 016 | .187 | .630 | 034 | .312 | .630 |
| 017 | .187 | .630 | 035 | .312 | .630 |
| 018 | .187 | .730 | 036 | .312 | .730 |

| Inches | mm | Inches | mm | Inches | mm | Inches | mm |
|---|---|---|---|---|---|---|---|
| .003 | 0.08 | .022 | 0.56 | .145 | 3.68 | .395 | 10.03 |
| .005 | 0.13 | .045 | 1.14 | .187 | 4.75 | .408 | 10.36 |
| .007 | 0.18 | .070 | 1.78 | .200 | 5.08 | .410 | 10.41 |
| .010 | 0.25 | .093 | 2.36 | .250 | 6.35 | .630 | 16.00 |
| .015 | 0.38 | .115 | 2.92 | .312 | 7.92 | .730 | 18.54 |

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Circuit diagrams are for information only.
4. All filters shall be supplied with mounting hardware (hex nut and lockwasher). Mounting hardware shall be furnished with the same finish as the filter case.
5. Terminal identification (nonsymmetrical filters): The case shall be marked at the threaded end of the filter with the symbol "C" or the symbol "L" as follows, or the circuit diagram shall be marked on the case.

| Circuit | Symbol |
|---|---|
| $L_1$ | C |
| $L_2$ | L |

6. Optional slot may be supplied, .050 ±.010 inches (1.27 ±0.25 mm) x .070 ±.010 inches (1.78 ±0.25 mm).
7. Imperfect thread or undercut optional .050 inch (1.27 mm) maximum.
8. One imperfect thread allowed .035 inch (0.89 mm) maximum.
9. Recommended mounting torque: 44 oz-in ±4 oz-in.

FIGURE 1. Case and hardware dimensions and circuit diagrams - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026l0-20T20:06Z
Check the source to verify that this is the currentversion before use.

REQUIREMENTS:

Design and construction:

Dimensions and configuration: See figure 1.

Weight: 10 grams maximum.

Case finish:

Class B filters, T only (tin plated or tin-lead plated).

(B) Class S filter, T or G only (tin plated, tin-lead plated, or gold plated). In accordance with MIL-F-28861.

Terminals: Solderable.

Operating temperature range: -55°C to +125°C.

Rated voltage: 150 V dc.

Rated current: See table I.

Capacitance: See table I for minimum capacitance value.

Dissipation factor: 3 percent maximum.

Voltage and temperature limits of capacitance: +15 percent, -40 percent.

Insulation resistance:

At +25°C: 1,000 megohms minimum or 1,000 megohm-microfarads minimum, whichever is less.

At +125°C: 100 megohms minimum or 100 megohm-microfarads minimum, whichever is less.

Insertion loss: See table I.

Voltage drop: See table I.

DC resistance: See table I.

(B) Seal: In accordance with MIL-F-28861. Leakage rate for class S filter shall not exceed $1 \times 10^{-7}$ atm $cm^3/s$.

Temperature rise: +25°C maximum.

Solderability of terminals: In accordance with MIL-F-28861.

(B) Quality assurance provisions: In accordance with MIL-F-28861.

Product assurance level: In accordance with table I.

Part or identifying number (PIN): The PIN shall be as follows:

M28861/03 - XXX X X

- XXX: Dash no. in accordance with figure 1 and table I
- X: Case finish
- X: Product assurance level in accordance with MIL-F-28861 and table I



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T20:06Z
Check the source to verify that this is the current version before use.

(B) TABLE I. Electrical characteristics.

| Dash number | Product assurance level Class B | Product assurance level Class S | Circuit | Maximum current (amps) | Minimum capacitance (μF) | Maximum voltage drop (volts) | Maximum DC resistance (ohms) | Minimum insertion loss (dB) in accordance 1/ 2/ with MIL-STD-220 At +25°C: 100 kHz | 150 kHz | 300 kHz | 1 MHz | 10 MHz | 100 MHz | 1 GHz | At -55°C and +125°C: 100 kHz | 150 kHz | 300 kHz | 1 MHz | 10 MHz | 100 MHz | 1 GHz |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 001, 019 | X | X | L1 | 0.1 | 0.25 | 0.17 | 1.7 | 32 | 39 | 51 | 60 | 60 | 60 | 70 | 30 | 37 | 49 | 58 | 60 | 60 | 70 |
| 002, 020 | X | X | L2 | 0.1 | 0.25 | 0.17 | 1.7 | 32 | 39 | 51 | 60 | 60 | 60 | 70 | 30 | 37 | 49 | 58 | 60 | 60 | 70 |
| 003, 021 | X | X | π | 0.1 | 0.50 | 0.17 | 1.7 | 49 | 60 | 70 | 80 | 80 | 80 | 80 | 47 | 58 | 68 | 78 | 80 | 80 | 80 |
| 004, 022 | X | X | L1 | 0.3 | 0.25 | 0.23 | 0.77 | 25 | 30 | 44 | 60 | 60 | 60 | 70 | 23 | 29 | 42 | 58 | 60 | 60 | 70 |
| 005, 023 | X | X | L2 | 0.3 | 0.25 | 0.23 | 0.77 | 25 | 30 | 44 | 60 | 60 | 60 | 70 | 23 | 29 | 42 | 58 | 60 | 60 | 70 |
| 006, 024 | X | X | π | 0.3 | 0.50 | 0.23 | 0.77 | 43 | 53 | 70 | 80 | 80 | 80 | 80 | 41 | 51 | 68 | 78 | 80 | 80 | 80 |
| 007, 025 | X | X | L1 | 0.5 | 0.25 | 0.18 | 0.36 | 20 | 26 | 39 | 59 | 60 | 60 | 70 | 18 | 24 | 37 | 57 | 60 | 60 | 70 |
| 008, 026 | X | X | L2 | 0.5 | 0.25 | 0.18 | 0.36 | 20 | 26 | 39 | 59 | 60 | 60 | 70 | 18 | 24 | 37 | 57 | 60 | 60 | 70 |
| 009, 027 | X | X | π | 0.5 | 0.50 | 0.18 | 0.36 | 37 | 48 | 66 | 80 | 80 | 80 | 80 | 35 | 46 | 64 | 78 | 80 | 80 | 80 |
| 010, 028 | X | X | L1 | 1.0 | 0.25 | 0.14 | 0.14 | 12 | 16 | 26 | 48 | 60 | 60 | 70 | 10 | 14 | 24 | 46 | 60 | 60 | 70 |
| 011, 029 | X | X | L2 | 1.0 | 0.25 | 0.14 | 0.14 | 12 | 16 | 26 | 48 | 60 | 60 | 70 | 10 | 14 | 24 | 46 | 60 | 60 | 70 |
| 012, 030 | X | X | π | 1.0 | 0.50 | 0.14 | 0.14 | 28 | 40 | 58 | 80 | 80 | 80 | 80 | 26 | 38 | 56 | 78 | 80 | 80 | 80 |
| 013, 031 | X | X | L1 | 3.0 | 0.25 | 0.15 | 0.05 | 11 | 15 | 20 | 36 | 60 | 60 | 70 | 9 | 13 | 18 | 34 | 60 | 60 | 70 |
| 014, 032 | X | X | L2 | 3.0 | 0.25 | 0.15 | 0.05 | 11 | 15 | 20 | 36 | 60 | 60 | 70 | 9 | 13 | 18 | 34 | 60 | 60 | 70 |
| 015, 033 | X | X | π | 3.0 | 0.50 | 0.15 | 0.05 | --- | --- | 38 | 70 | 80 | 80 | 80 | --- | --- | 36 | 68 | 80 | 80 | 80 |
| 016, 034 | X | X | L1 | 5.0 | 0.25 | 0.075 | 0.015 | 8 | 12 | 20 | 32 | 60 | 60 | 70 | 6 | 10 | 18 | 30 | 60 | 60 | 70 |
| 017, 035 | X | X | L2 | 5.0 | 0.25 | 0.075 | 0.015 | 8 | 12 | 20 | 32 | 60 | 60 | 70 | 6 | 10 | 18 | 30 | 60 | 60 | 70 |
| 018, 036 | X | X | π | 5.0 | 0.50 | 0.075 | 0.015 | --- | --- | 20 | 63 | 80 | 80 | 80 | --- | --- | 18 | 61 | 80 | 80 | 80 |

1/ Insertion loss measurements shall be made under full load over the frequency range of 100 kHz to 10 MHz. Insertion loss measurements above this frequency range shall be made under no load.

2/ The insertion loss requirements between any two adjacent specified frequencies shall be that of the lower of the two frequencies in order to accommodate resonant dips.



Source: https://assist.dla.mil -- Downloaded: 2026/10-20T20:06Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - ER
Navy - EC
Air Force - 85
NASA - NA

Review activities:
Army - AR, MI
Navy - SH
Air Force - 99
DLA - ES

User activities:
Army - AT, AV, ME
Navy - AS, MC, OS
Air Force - 19

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5915-0367-02)



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T20:06Z
Check the source to verify that this is the current version before use.