INCH-POUND

A-A-55167A
April 29, 1994
SUPERSEDING
A-A-55167
April 9, 1993

COMMERCIAL ITEM DESCRIPTION

FILTER, RADIO FREQUENCY INTERFERENCE

The General Services Administration has authorized the use of this commercial item description (CID) as a replacement for Federal Specification W-F-2190/7 which is canceled.

Abstract. This CID covers the general requirements for radio frequency interference (RFI) suppression power line filters. These filters consist of capacitors and inductors used in combination with each other and are provided with resistors as a safety feature. Filters covered by this CID are intended for commercial/industrial applications and should not be used in military systems needing stringent environmental and electrical requirements.

Part or Identifying Number (PIN). The PIN for this CID shall be as shown in the following example:

A-A-55167 - 01

CID number Dash number

Salient characteristics.

Voltage rating. The voltage rating shall be 120 V ac at 60 Hz; 250 V ac at 50 Hz.

Operating frequency. The operating frequency shall be 50/60 Hz.

Current rating. The current rating shall be as specified in table I.

Operating ambient temperature range. The operating ambient temperature range shall be -10°C to +40°C at rated current.

Maximum leakage current, line-to-ground. The maximum leakage current, line-to-ground, shall be 0.5 mA at 120 V ac, 60 Hz; 1.0 mA at 250 V ac, 50 Hz.

Hipot rating (1 minute). The hipot rating shall be 2250 V dc line-to-ground; 1450 V dc line-to-line.

Insertion loss. Insertion loss is given for line-to-ground in a 50-ohm circuit. Values shall be as specified in table I.

Electrical schematic. The electrical schematic shall be as specified on figure 1.

Design and construction. The case configuration and dimensions shall be as specified on figure 2.

Marking. Filters supplied to this CID shall be marked with the manufacturer's standard commercial PIN.

Regulatory requirements. This section is not applicable to this CID.

AMSC N/A
FSC 5915

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

or semiperish- 2. Applicability. The marking and labeling

TABLE I. Current rating and insertion loss.

Dash number A-A-55167-	Current rating	Minimum insertion loss (dB) line-to-ground in 50-ohm circuit					
		Frequency (MHz)					
		.15	.5	1	5	10	30
01	1 A	30	65	65	65	65	65
02	2 A	5	44	60	65	65	60
03	3 A	30	65	65	65	65	65
04	5 A	5	44	60	65	65	60
05	10 A	5	44	60	65	65	60
06	20 A	5	44	60	65	65	60


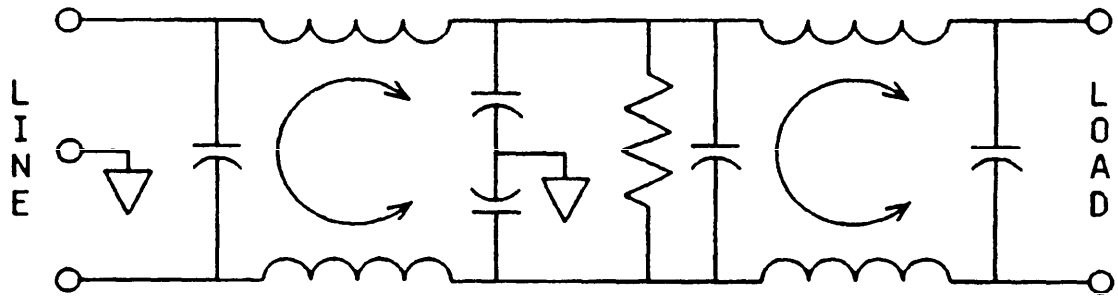



Figure 1. Electrical schematic.

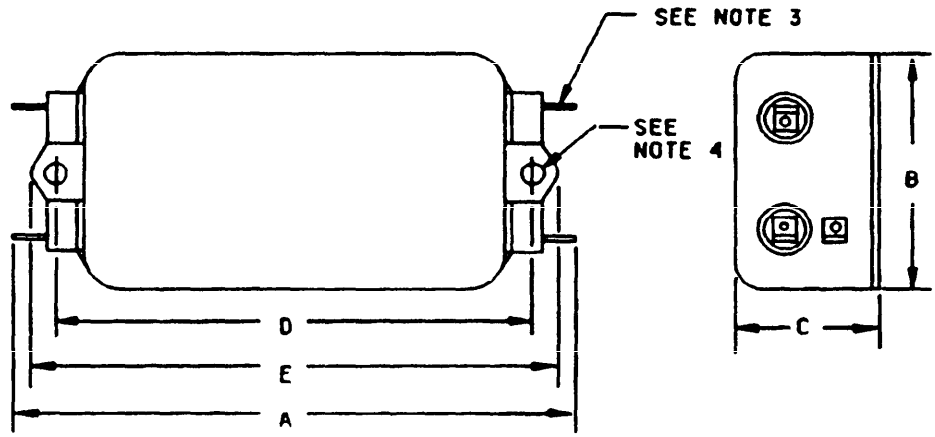

Case style A

Figure 2. Case configuration and dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

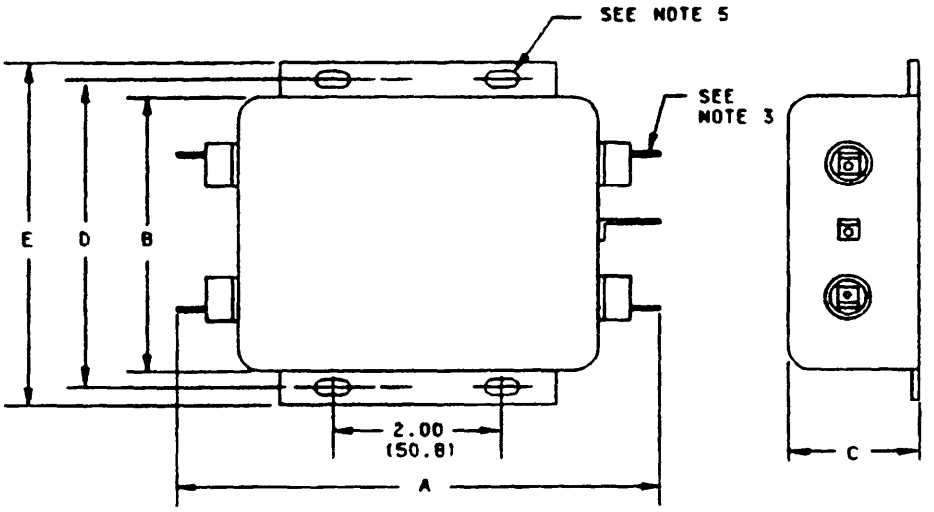

Case style B

PIN A-A-55167-	A (max)		B (max)		C (max)		D ±.015/±.38		E (max)		Case style
	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	
01	3.35	85.1	1.81	46.0	1.16	29.5	2.375	60.33	2.78	70.6	A
02	3.35	85.1	1.81	46.0	1.16	29.5	2.375	60.33	2.78	70.6	A
03	3.85	97.8	2.07	52.6	1.16	29.5	2.938	74.63	3.35	85.1	A
04	3.85	97.8	2.07	52.6	1.16	29.5	2.938	74.63	3.35	85.1	A
05	3.85	97.8	2.07	52.6	1.53	38.9	2.938	74.63	3.35	85.1	A
06	5.23	132.8	3.37	85.6	1.53	38.9	3.750	95.25	4.20	106.7	B

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Fastons: (Five) .250 inch (6.35 mm).
   Holes: .07 inch (1.8 mm) diameter.
4. Mounting holes: (Two) .188 inch (4.78 mm) diameter.
5. Mounting slots: (Four) .250 inch (6.35 mm) X .156 inch (3.96 mm).
6. Metric equivalents are in parentheses.

Figure 2. Case configuration and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 202610-26T09:44Z
Check the source to verify that this is the currentversion before use.

Suggested sources of supply. Suggested sources of supply are listed in table II. Additional sources will be added as they become available.

TABLE II. Suggested sources of supply.

CID dash number (PIN)	Vendor CAGE number		
	0S2B1	05245	13050
	Vendor commercial PIN		
A-A-55167-01	RME-A-301-L	1VR1	620A1V
A-A-55167-02	RME-A-302-L	2VR1	620A2V
A-A-55167-03	RME-A-303-L	3VR1	620A3V
A-A-55167-04	RME-A-305-L	5VR1	620A5V
A-A-55167-05	RME-A-310-L	10VR1	620A10V
A-A-55167-06	RME-A-320-L	20VR1	620A20V

Vendor CAGE number	Vendor name and address
0S2B1	RME Filters, Incorporated P.O. Box 838 98 Route 101 A Amherst, NH 03031-0838
05245	CORCOM, Incorporated 1600 Winchester Road Libertyville, IL 60048-1298
13050	Pulse Engineering Potter Operation 942 Highway 51 North Wesson, MS 39191-9138

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - 7FXE

PREPARING ACTIVITY:

DLA-ES

(Project 5915-D239)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

Suggested sources of supply. Suggested sources of supply are listed in table II. Additional sources will be added as they become available.

TABLE II. Suggested sources of supply.

CID dash number (PIN)	Vendor CAGE number		
	0S2B1	05245	13050
	Vendor commercial PIN		
A-A-55167-01	RME-A-301-L	1VR1	620A1V
A-A-55167-02	RME-A-302-L	2VR1	620A2V
A-A-55167-03	RME-A-303-L	3VR1	620A3V
A-A-55167-04	RME-A-305-L	5VR1	620A5V
A-A-55167-05	RME-A-310-L	10VR1	620A10V
A-A-55167-06	RME-A-320-L	20VR1	620A20V

Vendor CAGE number	Vendor name and address
0S2B1	RME Filters, Incorporated P.O. Box 838 98 Route 101 A Amherst, NH 03031-0838
05245	CORCOM, Incorporated 1600 Winchester Road Libertyville, IL 60048-1298
13050	Pulse Engineering Potter Operation 942 Highway 51 North Wesson, MS 39191-9138

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - 7FXE

PREPARING ACTIVITY:

DLA-ES

(Project 5915-D239)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.